

Product Information Packet

November 7, 2016

Data shown is for the current revision model #. Ensure your nameplate model # matches.

Model Number:	5CD184TA094B068
Catalog Number:	D449
Instruction Manual:	GEH-3967N
Connection Diagram:	36A167760CB501
Outline Drawing:	36A167945AA002

Accessory Connection Diagrams			
Bearing Thermocouple:	None	Heater:	None
RTD:	None	Thermistor:	None
Thermostat:	None	Winding Thermocouple:	None
Bearing RTD:	None		

Table of Contents	
Specification	01
Outline Drawing	02
Connection Drawing(s)	03

Marks:

MODEL NUMBER:	5CD184TA094B068	Enclosure Mtg Assem:	36A167770AA001
Outline Drawing:	36A167945AA002	Instruction Book:	GEH-3967N
Connection Diagram:	36A167760CB501	RPM:	1750/2100
Horsepower:	50	Armature Amps:	83.7
Armature Volts:	500	Type:	CD328AT
Wound:	SHUNT	Power Supply Code:	C
Enclosure:	DPFG	Insulation Class:	F
Duty:	CONT	Ambient Max (°C):	40 C
Rating Code:	184T1250-00	Field Volts:	300/150
K(V):	2.49 Cemf volts/Radian/Sec	WK2:	9.67Lb Ft2
K(T):	1.79 Ft/Amp	Year of Manufacture:	2016
Minimum Ambient:	0 C	Max Altitude:	3300 Ft

Resistances at 25 Degrees C :

Shunt Field:	93.0 OHMS
Armature:	.258 OHMS
Commutator Field:	.0764 OHMS

Inductances:

Armature Circuit Total:	9.150 mH Saturated
Shunt Field:	91.0 Henries Unsaturated

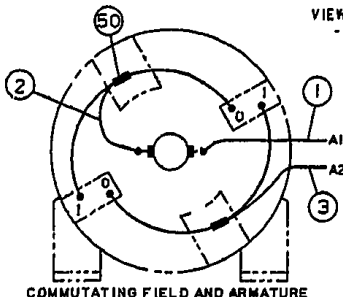
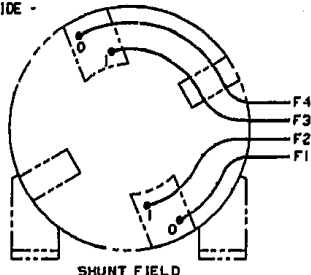
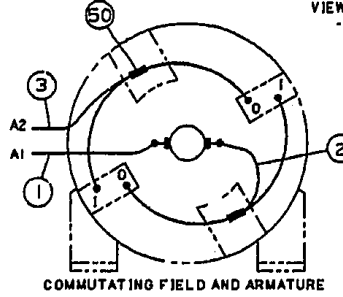
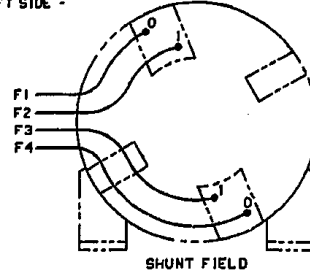
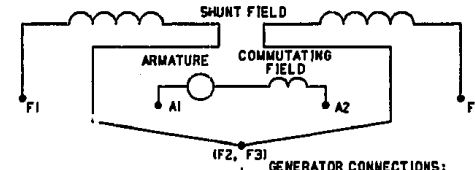
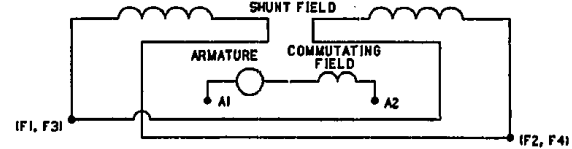
Shunt Field Data:

Shunt Field Current(1): 2.32 AMPS at Rated Load and 1750 RPM
 Shunt Field Current(2): 2.07 AMPS at Rated Load and 1867 RPM
 Shunt Field Current(3): 1.7 AMPS at Rated Load and 2100 RPM

Additional Machine Notes:

DRIPPROOF FULLY GUARDED - BALL BEARINGS
 CONDUIT BOX ON RIGHT HAND SIDE FACING COMMUTATOR END
 STANDARD SHAFT DRIVE END ONLY - WITH FEET
 WITH:
 CSA STAMP
 THERMOSTAT- NORMALLY CLOSED, AC RATING- 600V MAX-
 .5A, 250V-1.5A, OR 125V-3A, DC RATING- 30V MAX-
 1.5A. MAXIMUM CURRENT BASED ON INDUCTIVE LOADS UP
 TO AND INCLUDING NEMA NO.5 CONTACTOR.

Marks:

NO S.O.	GENERAL ELECTRIC	36A167760CB501	CONT ON SHEET SH NO.
REV 2 36A167760CB501 CONT ON SHEET SH NO.	TITLE CONNECTION DIAGRAM		
FIRST MADE FOR 2 POLE			
DIRECT CURRENT MOTOR AND GENERATOR - SHUNT WOUND 1 OR 2 CIRCUIT SHUNT FIELD - 2 CIRCUIT COMMUTATING FIELD			
VIEWS FACING COMMUTATOR END - LEADS OUT RIGHT SIDE -			
			
VIEWS FACING COMMUTATOR END - LEADS OUT LEFT SIDE -			
			
<p>ALL EXTERNAL LEADS ARE MARKED. ALL CONNECTIONS AND TERMINATIONS EXTERNAL TO MAGNET FRAME MUST BE INSULATED PER NATIONAL ELECTRICAL CODE AND SOUND LOCAL PRACTICES.</p> <p>SPACE HEATERS, WHEN SPECIFIED, WILL HAVE LEADS WITH TERMINAL MARKINGS H1 AND H2.</p> <p>THERMOSTAT, WHEN SPECIFIED, WILL HAVE LEADS WITH TERMINAL MARKINGS P1 AND P2.</p> <p>ENCIRCLED NUMBERS MAY BE USED FOR PART IDENTIFICATION.</p>			
<p>FOR HIGH NAMEPLATE EXCITATION VOLTAGE CONNECT SHUNT FIELD LEADS AS INDICATED</p> <div style="display: flex; justify-content: space-around; align-items: center;">  </div>			
<p>MOTOR CONNECTIONS: FOR CCW ROTATION FACING COMMUTATOR END, MAKE LEADS F1 AND A1 THE SAME POLARITY. FOR CW ROTATION FACING COMMUTATOR END, MAKE LEADS F1 AND A2 THE SAME POLARITY.</p>		<p>GENERATOR CONNECTIONS: FOR CW ROTATION FACING COMMUTATOR END, F1 POSITIVE WILL MAKE A2 POSITIVE. FOR CCW ROTATION FACING COMMUTATOR END, F1 POSITIVE WILL MAKE A1 POSITIVE.</p>	
<p>FOR LOW NAMEPLATE EXCITATION VOLTAGE CONNECT SHUNT FIELD LEADS AS INDICATED</p> <div style="display: flex; justify-content: space-around; align-items: center;">  </div>			
<p>MOTOR CONNECTIONS: FOR CCW ROTATION FACING COMMUTATOR END, MAKE LEADS (F1,F3) & A1 THE SAME POLARITY. FOR CW ROTATION FACING COMMUTATOR END, MAKE LEADS (F1,F3) & A2 THE SAME POLARITY.</p>		<p>GENERATOR CONNECTIONS: FOR CW ROTATION FACING COMMUTATOR END, (F1,F3) POSITIVE WILL MAKE A2 POSITIVE. FOR CCW ROTATION FACING COMMUTATOR END, (F1,F3) POSITIVE WILL MAKE A1 POSITIVE.</p>	
2	10-11-94 R.D.BOLLA	NO S.O. RETR	QC(1) CAD
MADE BY P.HARABEDIAN 3-19-69		FILE KC13-1	DIV OR DEPT GE MOTORS
RE-ISSUED CAD/ R.D.BOLLA 10-11-94		LOCATION ERIE	36A167760CB501 CONT ON SHEET SH NO.

C5X.A.36A167760CB501R02