

Product Information Packet

November 7, 2016

Data shown is for the current revision model #. Ensure your nameplate model # matches.

Model Number:	5KS145ATE202RG3
Catalog Number:	E7052
Instruction Manual:	GEI-M1023
Connection Diagram:	GEM2034E-FIG3
Outline Drawing:	358B6213AD

Accessory Connection Diagrams

Bearing Thermocouple:	None	Heater:	None
RTD:	None	Thermistor:	None
Thermostat:	None	Winding Thermocouple:	None
Bearing RTD:	None		

Table of Contents

Specification	01
Performance Characteristics	02
Outline Drawing	03
Connection Drawing(s)	04



Marks:

MODEL NUMBER:	5KS145ATE202RG3	Estimated Weight:	54 Lbs
Outline Drawing:	358B6213AD	Time Rating:	CONT
Connection Diagram:	GEM2034E-FIG3	Enclosure:	DP
Instruction Book:	GEI-M1023	Encl Construction:	OPEN
Design Code:	14AD1004A	Ambient Max(°C):	40
Type:	KS	Alt Ambient Max(°C):	--
Frame:	145T	Insulation Class:	F
Phases:	3	NEMA Design:	B
Poles:	4	Nominal Efficiency:	86.5 %
Output Power:	1.5HP 1.1KW	Guaranteed Efficiency:	84.0
RPM:	1730	3/4 Load Efficiency:	88.4
Voltage:	230/460	KVA Code:	M
Hertz:	60	Max KVAR:	.7
Amps - FL:	4.2/2.1	Power Factor:	78
Service Factor:	1.15	Bearing - DE:	6205ZZ
Alt Service Factor:	--	Bearing - ODE:	6205ZZ

Enclosure is Dripproof

Stamped Nameplate Notes:**Additional Information:**

MADE FROM MODEL 5KS145ATE202
 ADD AEGIS GROUND RING
 MOD AMSTUTZ 15-NOV-2011

Performance Characteristics

1st Winding 1st Connection

Design: 14AD1004A

Marks:


LOAD %	125.0	115.0	100.0	75.0	50.0	25.0	0.0
% EFF	86.22	86.9	87.92	88.45	87.72	82.33	0.00
% PF	83	82.04	79.97	73.96	62.36	40.8	6.9
AMPS	2.45	2.26	2	1.61	1.28	1.04	0.93

TORQ(FL)#FT	4.54	TORQ(LR)%FL	274.08	TORQ(BD)%FL	327.68
AMPS(LR)	14.34	PF AT START	0.54		


This motor is capable of two cold or one hot start with a maximum connected load inertia of 74 Lb-Ft Sq (3.12 Kg-meter Sq)at 100% voltage, where the load torque varies with the square of the speed. Acceleration time with maximum inertia and the above load type is 36 seconds. Safe stall time at 100% voltage is 86 seconds cold, 61 seconds hot. Rotor inertia is 0.11 Lb-Ft Sq (0 Kg-meter Sq).

Open Circuit A-C:	0.144	Short Circuit D-C:	0.007
Short Circuit A-C:	0.007	X/R Ratio:	2.608
Stator Slots:	36	Rotor Slots:	28


Speed Torque Current Curve (First Connection, First Speed)

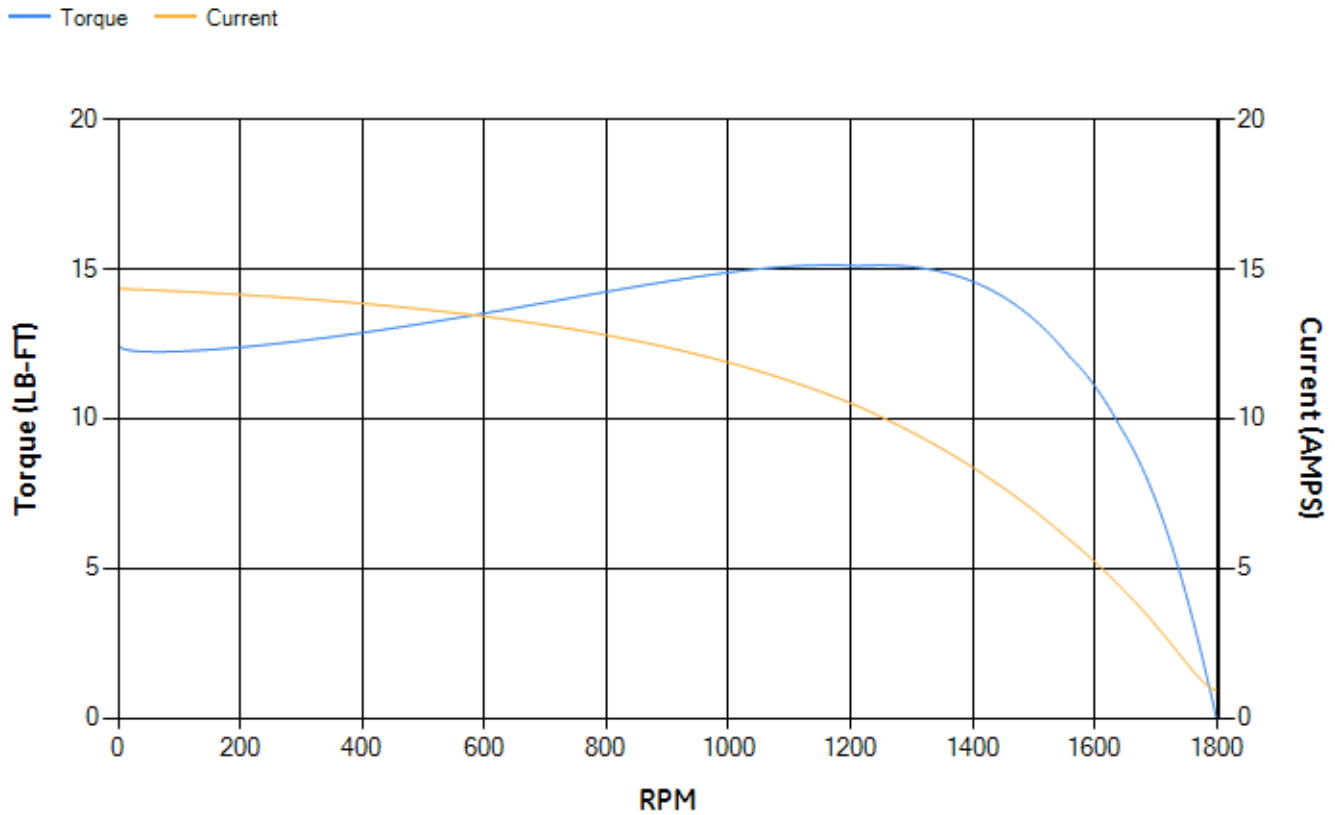


Marks:

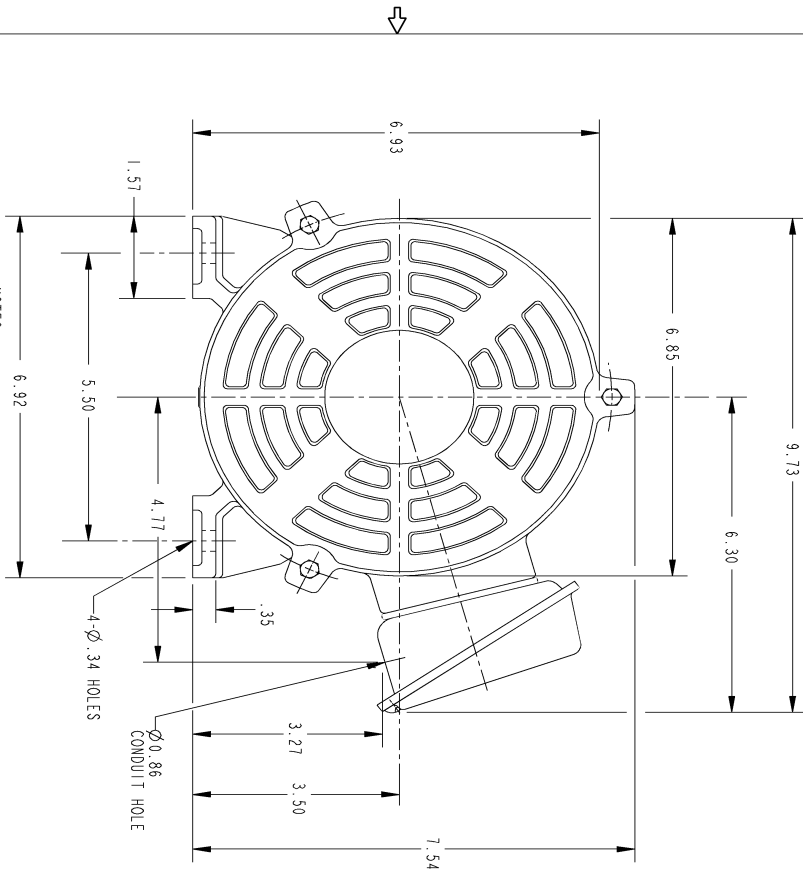

- NOTES :
1. CONDUIT BOX MAY BE PLACED WITH THE ENTRANCE DOWN, UP OR ON EITHER SIDE.
 2. F-1 ASM AS SHOWN.
 3. F-2 ASM - HAS CONDUIT BOX ON OPPOSITE SIDE.



THIRD ANGLE PROJECTION

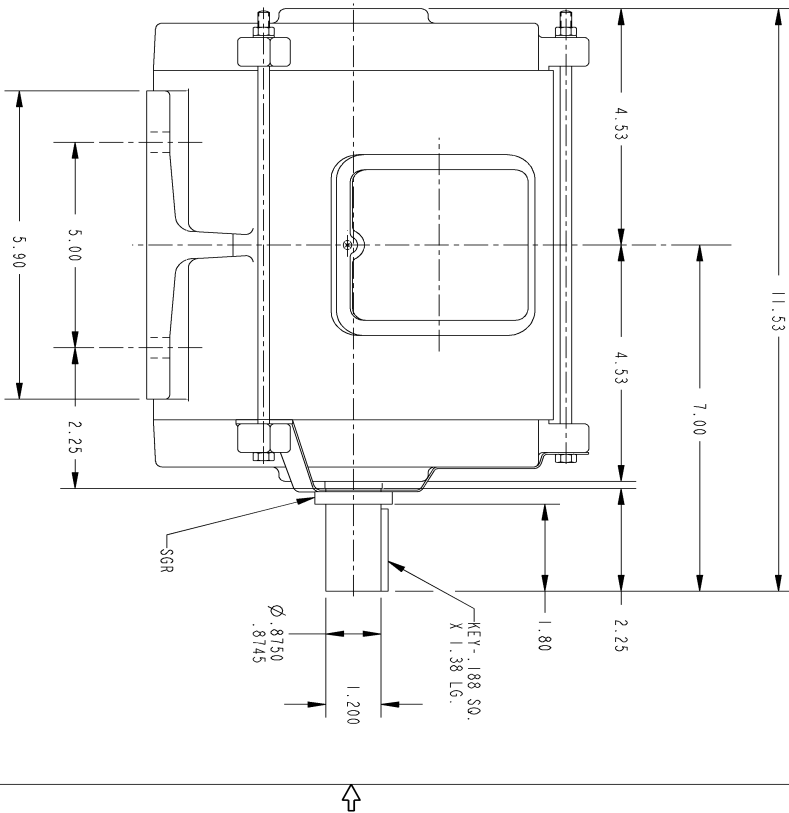

This document is the property of General Electric Company ("GE") and contains proprietary information of GE. This document is issued on the express condition that recipient thereof shall not disseminate, distribute, or otherwise use the information contained herein, shall be disclosed to any third party, or be used for any purpose other than that intended by GE. The information shall be used by the recipient only as expressly permitted by the recipient. This document shall be returned to GE upon its request. This document is subject to standard restrictions under U.S. Export Control and regulations.

GE PROPRIETARY INFORMATION

SIZE: DRAWING NO. B

358B6213AD

REV 0 SHEET

REVISIONS

REV.	DESCRIPTION	DATE	APPROVED

SIGNATURES	DATE	GE Motors	GENERAL ELECTRIC COMPANY
MODEL	SHANKAR 01/14/11		OUTLINE 145T - OPEN DRIP PROOF WITH SGR 358B6213AD
DETAIL	VENKAT J 01/14/11		
CHECKED	VENKAT J 01/14/11		
ENGRS	VENKAT J 01/14/11		
WIG			
QUALITY		SIZE: DRAWING B	REV 0
ISSUED	SHANKAR 01/14/11	SCALE: DRAWING SCALE	SHEET 1 of 1
SO:LD MODEL: MODEL NAME			

Marks:

Connection Diagram
GEM2034E-FIG3

