



wiring diagram

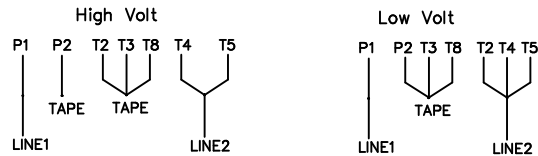

NOTE: To reverse rotation, interchange T5 & T8

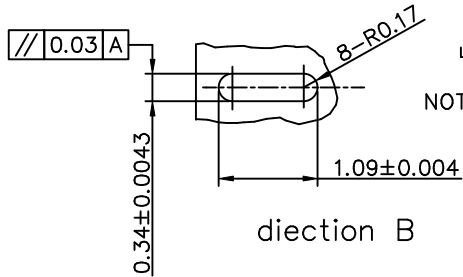

| CAT.NO. | HP | Volt | Hz | PH | Pole | Rotation | Capacitor | Thermal |
|---------|-----|---------|----|----|------|----------|--------------|---------|
| M099836 | 1/2 | 115/230 | 60 | 1 | 8 | CCWLE | 30mfd.240VAC | MEJ55RX |

| NO. | | REVISION | BY & DATE | CHK | ANG | ±1/2" | FINISH | CAD FILE | | 16988000 | SIZE | DRAWING NO. | REV. | | | |
|--|--|----------|-----------|-----|-----|-------|--------|----------|--|----------|-------|-------------|---------------------------------|---|---------------------------------------|--------------------|
| THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED THIS IS AN ELECTRONICALLY GENERATED DOCUMENT - DO NOT SCALE THIS PRINT | | | | | | | | | | | RFP | CAD FILE | 16988000 | B | 169880-00 | |
| TOLERANCES UNLESS SPECIFIED | | | | | | | | | | | DEC. | INCHES | LEESON | | ELECTRIC MOTORS GEARMOTORS AND DRIVES | DRAWN RLW 07/23/02 |
| | | | | | | | | | | | .X | ±.1 | | | CHK | |
| | | | | | | | | | | | .XX | ±.03 | TITLE | | APPD | |
| | | | | | | | | | | | .XXX | ±.005 | OUTLINE 48 FRAME RESILIENT BASE | | SCALE | 3=64 |
| | | | | | | | | | | | .XXXX | ±.0005 | MAT'L | | REF | |
| | | | | | | | | | | | | | | | FMF | |
| | | | | | | | | | | | | | | | PREV | |