


| TYPE | OUTPUT | | POLE | TIME RATING | VOLTAGE | Hz | SYNSPEED R.P.M |
|-------|--------|-------|------|-------------|---------|----|----------------|
| | HP. | KW. | | | | | |
| AEH8N | 150 | 111.9 | 4 | CONT. | 575 | 60 | 1800 |

TOTALLY ENCLOSED FAN-COOLED TYPE, SQUIRREL-CAGE ROTOR

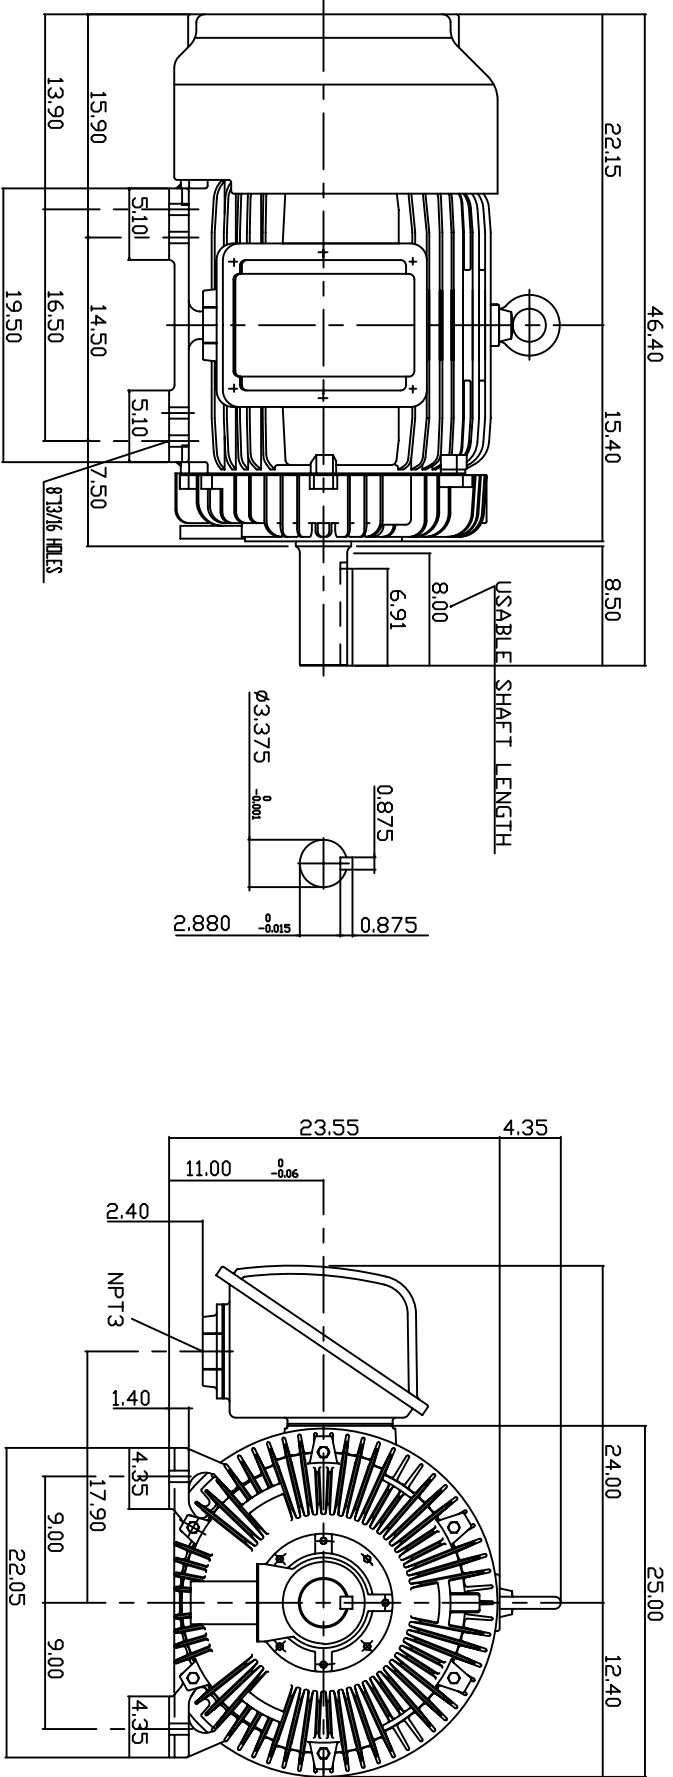

NOTE:

1. DIMENSIONS IN INCH
2. FRAME NO. 445T
3. F CLASS INSULATION, S.F.115
4. FOR DIRECT FLEXIBLE COUPLING
5. ENCLOSURE: IP54
6. BEARING SIZE: DRIVE END: 6318
NON-DRIVE END: 6316
7. APPROX. WEIGHT: 1900 LBS

TW-56C

| DWN. | S.DING | JAN -28 -2005 |
|-------|---------|---------------|
| CHKD. | H.HUANG | JAN -28 -2005 |
| APPD. | C.WANG | JAN -28 -2005 |

DATE 20050616
 CATALOG # EP15045
 3-PHASE INDUCTION MOTOR



DWG NO. 3A040Y651
 REV: 00

OUTLINE DIMENSIONS