

Product Information Packet

November 7, 2016

Data shown is for the current revision model #. Ensure your nameplate model # matches.

Model Number:	5CD142EA019B017
Catalog Number:	D587
Instruction Manual:	GEH-3967N
Connection Diagram:	36A167960CA501
Outline Drawing:	36A167921AA001

Accessory Connection Diagrams			
Bearing Thermocouple:	None	Heater:	None
RTD:	None	Thermistor:	None
Thermostat:	None	Winding Thermocouple:	None
Bearing RTD:	None		

Table of Contents	
Specification	01
Outline Drawing	02
Connection Drawing(s)	03

Marks:

MODEL NUMBER: 5CD142EA019B017
Outline Drawing: 36A167921AA001
Connection Diagram: 36A167960CA501
Horsepower: 2
Armature Volts: 240
Wound: SHUNT
Enclosure: DPGF
Duty: CONT
Rating Code: 142E1220-09
K(V): 1.14 Cemf volts/Radian/Sec
K(T): .79 Ft/Amp
Minimum Ambient: 0 C

Enclosure Mtg Assem: 36A167770CA201
Instruction Book: GEH-3967N
RPM: 1750/2300
Armature Amps: 7.6
Type: CDL182AT
Power Supply Code: D
Insulation Class: F
Ambient Max (°C): 40 C
Field Volts: 300/150
WK2: .28Lb Ft2
Year of Manufacture: 2016
Max Altitude: 3300 Ft

Resistances at 25 Degrees C :

Shunt Field: 619 OHMS
Armature: 2.0591 OHMS
Commutator Field: .8853 OHMS

Inductances:

Armature Circuit Total: 44.250 mH Saturated
Shunt Field: 197.0 Henries Unsaturated

Shunt Field Data:

Shunt Field Current(1): .35 AMPS at Rated Load and 1750 RPM
 Shunt Field Current(2): .28 AMPS at Rated Load and 1933 RPM
 Shunt Field Current(3): .2 AMPS at Rated Load and 2300 RPM

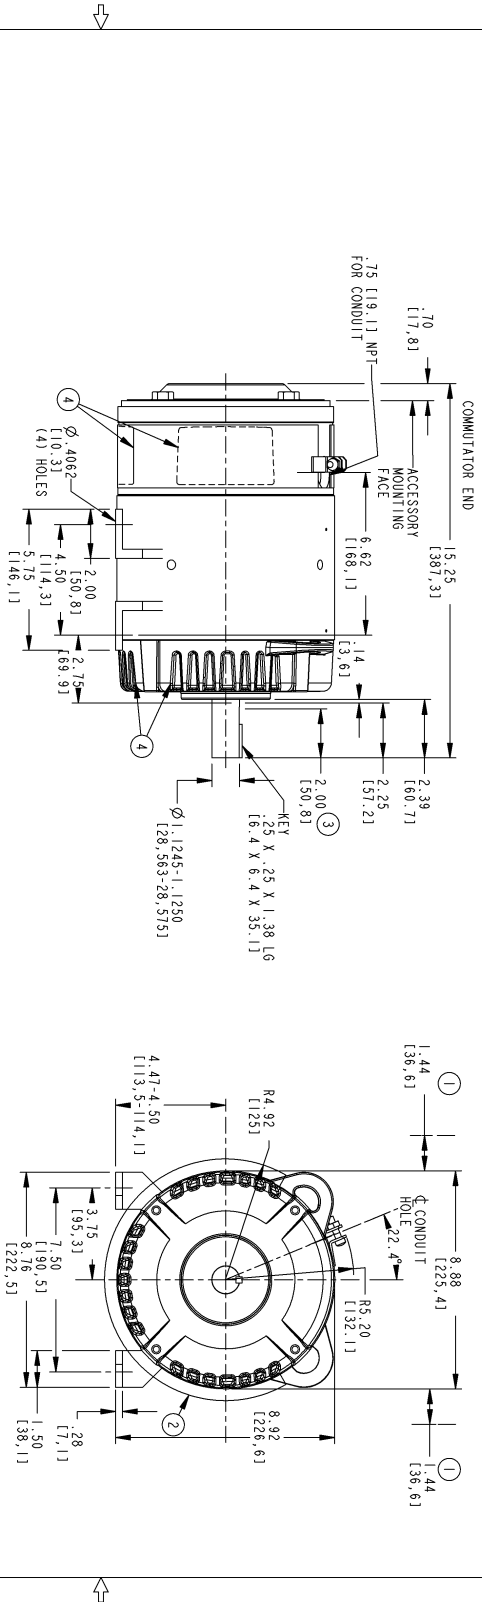
Additional Machine Notes:

DRIPPROOF FULLY GUARDED - BALL BEARINGS
 STANDARD SHAFT DRIVE END ONLY - WITH FEET
 WITH:
 CSA STAMP
 THERMOSTAT- NORMALLY CLOSED, AC RATING- 600V MAX-
 .5A, 250V-1.5A, OR 125V-3A, DC RATING- 30V MAX-
 1.5A. MAXIMUM CURRENT BASED ON INDUCTIVE LOADS UP
 TO AND INCLUDING NEMA NO.5 CONTACTOR.




NAME:208009544 OBJECT:36A167921AA001 DATE:12-Feb-08 13:08:48

Marks:



- ① SPLASPROOF FULLY GUARDED MACHINES WILL HAVE ADDITIONAL COVERS INCREASING THE OVERALL WIDTH AT THE COMMUTATOR END AND DRIVE END SIDE AIR OPENINGS.
- ② DRIPPROOF FULLY GUARDED VERTICAL DRIVE END SHAFT DOWN MACHINES WILL HAVE ADDITIONAL COVERS INCREASING THE OVERALL WIDTH AND EXCEEDING BOTTOM OF MOUNTING FEET AT THE COMMUTATOR END OPENINGS.
- ③ REPRESENTS MINIMUM LENGTH OF SHAFT AVAILABLE FOR HUBS.
- ④ AIR OPENINGS, FOR ENCLOSURE TYPE AND MOUNTING POSITION, SEE ENCLOSURE AND MOUNTING ASSEMBLY. TOTALLY ENCLOSED MACHINES WILL NOT HAVE OPENINGS OR COVERS ON DRIVE END.
- ⑤ SHAFT ROUNDOFF NOT TO EXCEED .002 (0.051 mm) INCH TOTAL INDICATOR READING.



THIRD ANGLE PROJECTION

Part must conform to SI 900000 Sect. 4, Toxicity Procedure

APPLICABLE PRACTICES	FOR ADDITIONAL INFO REFER TO:
DIMENSIONS ARE IN INCHES	
TOLERANCE ON: 1 PL. DECIMALS ± .005 2 PL. DECIMALS ± .002 3 PL. DECIMALS ± .001	
ANGLES ± 1.0	
FINISH	

SIGNATURES	DATE
DESIGNED BY: P. WHEELER	3/2/08
CHECKED BY:	
DATE:	

APPROX. NET WT. = 104 LBS.

GE Consumer & Industrial
GENERAL ELECTRIC COMPANY

OUTLINE
CE - ACS DE- NEMA AT
FME-C080AT

REV	DESCRIPTION	DATE	APPROVED
4	REDRAWN IN PROOF W/CHANGES UNTABULATED DWGS.	2/12/08	RDH

SCALE: 0.250 REF. No. 36A167921AA001 4 SHEET 1 of 1



imagination at work

GE PROPRIETARY AND CONFIDENTIAL INFORMATION
This document is the property of General Electric Company (GE) and contains proprietary information of GE. This document is loaned to the recipient under the condition that it shall be used only for the specific purpose for which it is loaned. It shall not be reproduced, copied, or disseminated in any form or by any means without the express written consent of GE Industrial Systems and the recipient. This document may be subject to certain restrictions under applicable U.S. export control laws and regulations.

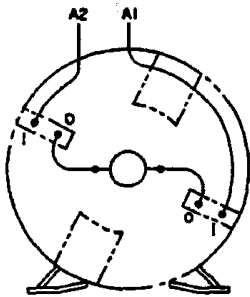
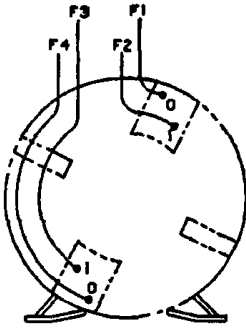
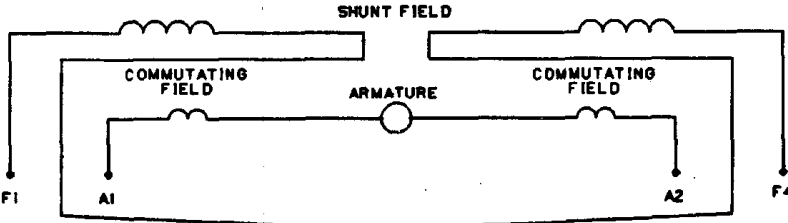
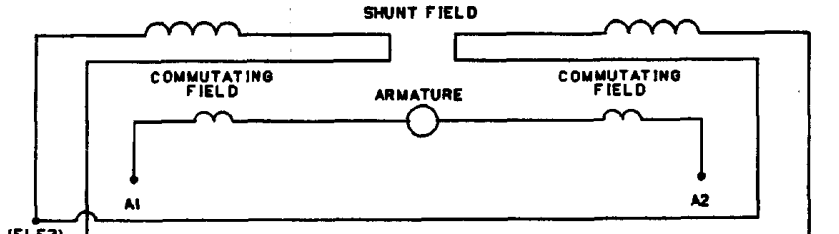
REV	DESCRIPTION	DATE	APPROVED
4	REDRAWN IN PROOF W/CHANGES UNTABULATED DWGS.	2/12/08	RDH

36A167921AA001 4 SHEET 1 of 1



imagination at work

Marks:

NO S.O.	GENERAL ELECTRIC	36A167960CA501 CONT ON SHEET	SH NO.				
REV 1 36A167960CA501 CONT ON SHEET	TITLE CONNECTION DIAGRAM						
SH NO.	FIRST MADE FOR 180AT 2 POLE						
DIRECT CURRENT MOTOR AND GENERATOR - SHUNT WOUND 1 OR 2 CIRCUIT SHUNT FIELD, 1 CIRCUIT COMMUTATING FIELD							
VIEWS FACING COMMUTATOR END							
							
COMMUTATING FIELD AND ARMATURE	SHUNT FIELD						
<p>ALL EXTERNAL LEADS ARE MARKED. ALL CONNECTIONS AND TERMINATIONS EXTERNAL TO MAGNET FRAME MUST BE INSULATED PER NATIONAL ELECTRICAL CODE AND SOUND LOCAL PRACTICES.</p> <p>SPACE HEATERS, WHEN SPECIFIED, WILL HAVE LEADS WITH TERMINAL MARKINGS H1 AND H2.</p> <p>THERMOSTAT, WHEN SPECIFIED, WILL HAVE LEADS WITH TERMINAL MARKINGS P1 AND P2.</p> <p>ENCIRCLED NUMBERS MAY BE USED FOR PART IDENTIFICATION.</p>							
<p>FOR HIGH NAMEPLATE EXCITATION VOLTAGE CONNECT SHUNT FIELD LEADS AS INDICATED</p>							
	(F2, F3)						
<p>MOTOR CONNECTIONS: FOR CCW ROTATION FACING COMM END, MAKE LEADS F1 AND A1 THE SAME POLARITY. FOR CW ROTATION FACING COMM END, MAKE LEADS F1 AND A2 THE SAME POLARITY.</p>	<p>GENERATOR CONNECTIONS: FOR CW ROTATION FACING COMM END, F1 POSITIVE WILL MAKE A2 POSITIVE. FOR CCW ROTATION FACING COMM END, F1 POSITIVE WILL MAKE A2 POSITIVE.</p>						
<p>FOR LOW NAMEPLATE EXCITATION VOLTAGE CONNECT SHUNT FIELD LEADS AS INDICATED</p>							
	(F1, F3) (F2, F4)						
<p>MOTOR CONNECTIONS: FOR CCW ROTATION FACING COMM END, MAKE LEADS (F1, F3) AND A1 THE SAME POLARITY. FOR CW ROTATION FACING COMM END, MAKE LEADS (F1, F3) AND A2 THE SAME POLARITY.</p>	<p>GENERATOR CONNECTIONS: FOR CW ROTATION FACING COMM END, (F1, F3) POSITIVE WILL MAKE A2 POSITIVE. FOR CCW ROTATION FACING COMM END, (F1, F3) POSITIVE WILL MAKE A1 POSITIVE.</p>						
<p>94-10-12 NO S.O. DC HILL RETRACED</p>	<p>MADE BY N STEWART 75-08-05</p> <p>RE-ISSUED CAD/DC Hill 94-10-12</p>	<p>APPROVALS FILE KC13-1</p>	<p>GE MOTORS ERIE</p>	<p>DIV OR DEPT LOCATION</p>	<p>36A167960CA501 CONT ON SHEET</p>	<p>SH NO.</p>	<p>DISTR TO 49-3131 4487 CAD</p>

ORIGINAL FRACING

C5X.A.36A167960CA501R01