| TYPE | OUTPUT | | POLE | TIME RATING | VOLTAGE V | Hz | SYN.SPEED R.P.M |
|---|---|---|---|---|---|---|---|
| | HP. | kW. | | | | | |
| AEHH8N | 150 | 111.9 | 6 | CONT. | 575 | 60 | 1200 |

TOTALLY ENCLOSED FAN-COOLED TYPE. SQUIRREL-CAGE ROTOR

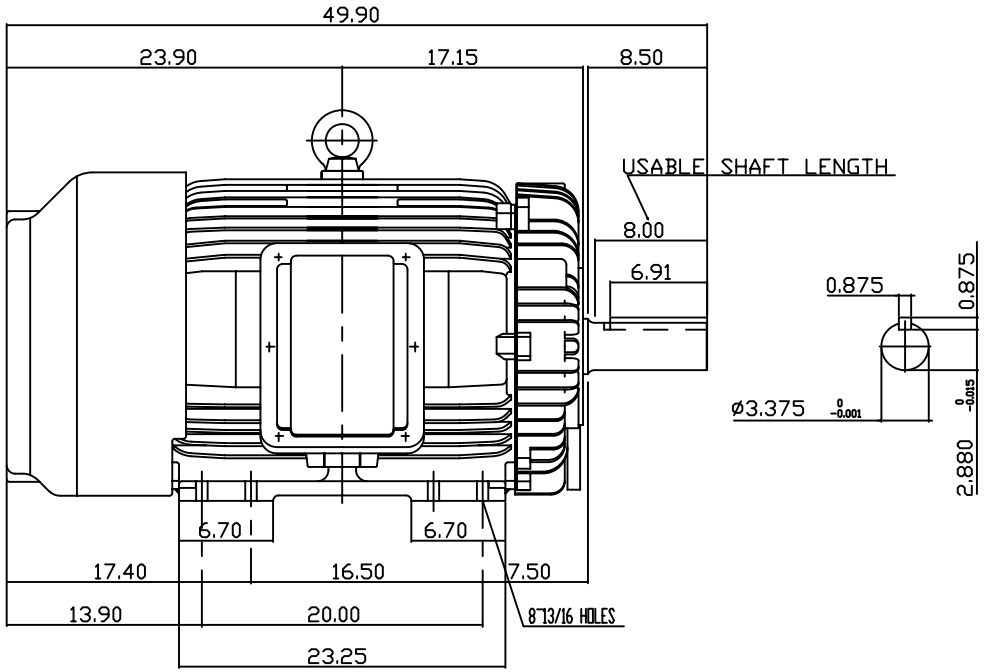


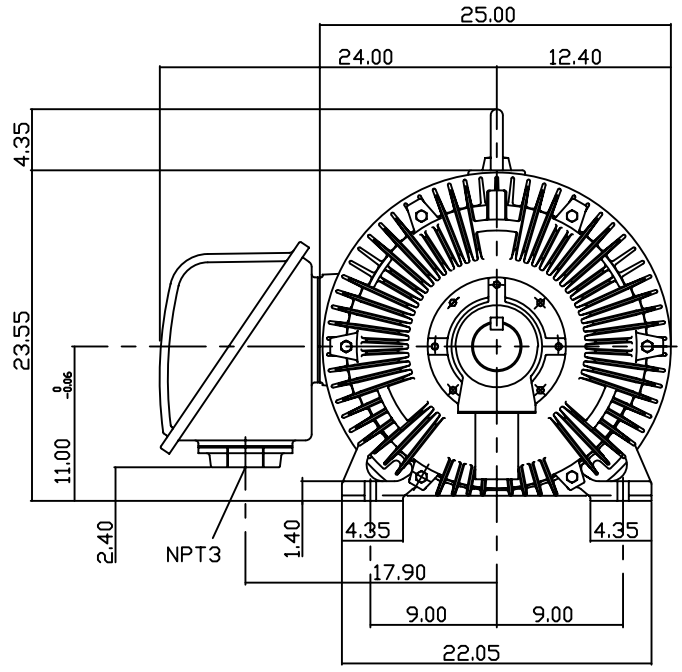


NOTE:

1. DIMENSIONS IN INCH
2. FRAME NO. 447T
3. F CLASS INSULATION, S.F.1.15
4. FOR BELTED SERVICE
5. ENCLOSURE: IP54
6. BEARING SIZE: DRIVE END: NU320
   NON-DRIVE END: 6316
7. APPROX. WEIGHT: 2450 LBS

| | | |
|---|---|---|
| DWN. | N.QIN | JAN 13 2005 |
| CHKD. | H.HUANG | JAN 13 2005 |
| APPD. | C.WANG | JAN 13 2005 |

DATE 20050617

CATALOG #EP15065R

OUTLINE DIMENSIONS

3-PHASE INDUCTION MOTOR

TECO Westinghouse

DWG NO. 3A040Y597 REV: 00

TW-56C