

# Product Information Packet

November 9, 2016

Data shown is for the current revision model #. Ensure your nameplate model # matches.

<b>Model Number:</b>	<b>5KS445XAA380B</b>
<b>Catalog Number:</b>	<b>M9595</b>
<b>Instruction Manual:</b>	GEI-56128
<b>Connection Diagram:</b>	GEM2034E-FIG7
<b>Outline Drawing:</b>	239C6600ZC

Accessory Connection Diagrams			
<b>Bearing Thermocouple:</b>	None	<b>Heater:</b>	None
<b>RTD:</b>	None	<b>Thermistor:</b>	None
<b>Thermostat:</b>	None	<b>Winding Thermocouple:</b>	None
<b>Bearing RTD:</b>	None		

## Table of Contents

Specification	01
Performance Characteristics	02
Outline Drawing	03
Connection Drawing(s)	04
Spare parts	05



**Marks:**

<b>MODEL NUMBER:</b>	<b>5KS445XAA380B</b>	<b>Estimated Weight:</b>	2040 Lbs
<b>Outline Drawing:</b>	239C6600ZC	<b>Time Rating:</b>	CONT
<b>Connection Diagram:</b>	GEM2034E-FIG7	<b>Enclosure:</b>	TEFC
<b>Instruction Book:</b>	GEI-56128	<b>Encl Construction:</b>	841
<b>Design Code:</b>	44BD3089B	<b>Ambient Max(°C):</b>	40
<b>Type:</b>	KS	<b>Alt Ambient Max(°C):</b>	--
<b>Frame:</b>	445T	<b>Insulation Class:</b>	H
<b>Phases:</b>	3	<b>NEMA Design:</b>	B
<b>Poles:</b>	6	<b>Nominal Efficiency:</b>	95.0 %
<b>Output Power:</b>	125HP 92.5KW	<b>Guaranteed Efficiency:</b>	94.5
<b>RPM:</b>	1190	<b>3/4 Load Efficiency:</b>	95.5
<b>Voltage:</b>	575	<b>KVA Code:</b>	G
<b>Hertz:</b>	60	<b>Max KVAR:</b>	42.6
<b>Amps - FL:</b>	120.0	<b>Power Factor:</b>	82.0
<b>Service Factor:</b>	1.15	<b>Bearing - DE:</b>	NU 318
<b>Alt Service Factor:</b>	--	<b>Bearing - ODE:</b>	6318ZC3

**Enclosure is Totally Enclosed Fan-Cooled**

**Stamped Nameplate Notes:**

IEEE-STD-841-2009  
 ROLLER BEARING - FOR BELTED LOAD ONLY  
 DE BRG 90RU03M, ODE BRG 90BC03JP3  
 STAMP NP249A5564P051 AS BELOW:  
 MODEL:5KS445XAA380B S/N: XXX  
 CSA CERTIFIED CSA09.2216219 FOR EX NA IIC 200 C GC  
 CL 1 ZONE2 AEX NA IIC 200C;CL 1 DIV2 GRP ABCD 200C  
 IN -25C <= AMB <= 40C, 1.0 SF ON SINE-WAVE PWR  
 SURF TEMP 200C AT 1.15SF ON SINE-WAVE PWR  
 OR 200C VT OR 230C CT OR 200C CHP PWM CONTROL  
 ALTERNATE RATING FOR PWM CONTROL 1.0SF 40C AMB  
 VT 0 - 60 HZ, CT 15-60 HZ, CHP 60-90 HZ.

**Additional Information:**

6P - T EXTN  
 PAINTED FRAME ID & SHAFT,  
 FAN COVER INSIDE & ODE E/S OUTSIDE  
 700 CU IN - 3.00" NPT  
 INPRO SEAL BOTH ENDS  
 OIL RESISTANT SLEEVING ON LEADS  
 .002" TIR SHAFT RUNOUT  
 ROUTINE TEST REPORT AND 5 POINT VIBRATION TEST  
 REPORT INCLUDED IN C/B  
 COPPER WASHER UNDER HEADS OF BEARING CAP BOLTS,  
 APPLY TITE-SEAL (A50CD427A) ON BEARING CAP SCREWS,  
 RABBETS AND PLUG THREADS.  
 B5F4C4 HIGH FATIGUE STEEL AISI 4142 SHAFT MATERIAL



GROUND PAD  
F1 MOUNTING

**Performance Characteristics**

1st Winding 1st Connection

**Design: 44BD3089B**

Marks:


LOAD %	125.0	115.0	100.0	75.0	50.0	25.0	0.0
% EFF	94.8	95.02	95.5	95.52	95.17	92.79	0.00
% PF	83.77	83.3	82.06	77.73	67.85	45.49	3.25
AMPS	147.32	135.97	119.43	94.54	72.47	55.43	47.55

<b>TORQ(FL)#FT</b>	550.96	<b>TORQ(LR)%FL</b>	194.21	<b>TORQ(BD)%FL</b>	252.13
<b>AMPS(LR)</b>	730.62	<b>PF AT START</b>	0.35		


This motor is capable of two cold or one hot start with a maximum connected load inertia of 6408 Lb-Ft Sq (269.78 Kg-meter Sq) at 100% voltage, where the load torque varies with the square of the speed. Acceleration time with maximum inertia and the above load type is 38 seconds. Safe stall time at 100% voltage is 77 seconds cold, 46 seconds hot. Rotor inertia is 100.88 Lb-Ft Sq (4.25 Kg-meter Sq).

<b>Open Circuit A-C:</b>	0.862	<b>Short Circuit D-C:</b>	0.026
<b>Short Circuit A-C:</b>	0.051	<b>X/R Ratio:</b>	9.922
<b>Stator Slots:</b>	72	<b>Rotor Slots:</b>	58

**Speed Torque Current Curve (First Connection, First Speed)**

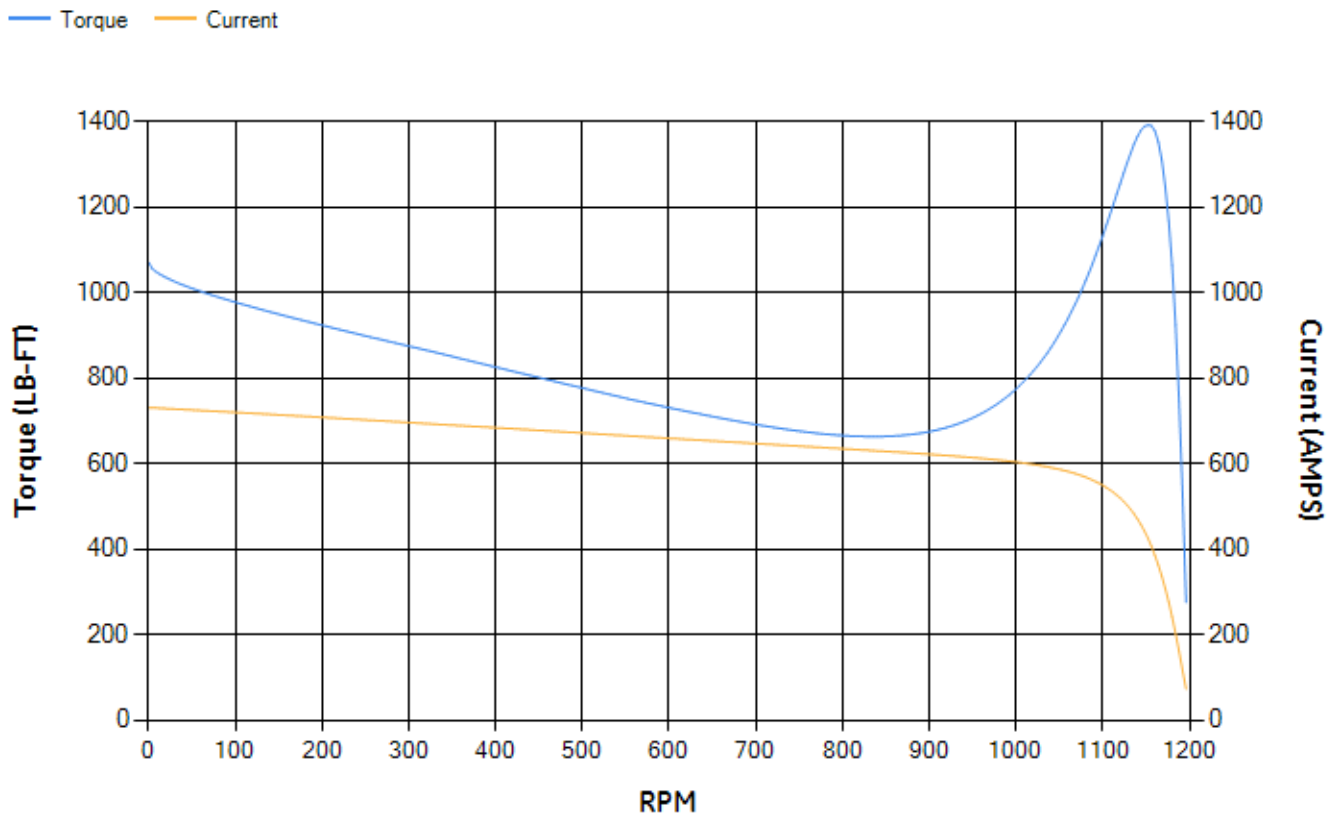

Marks:

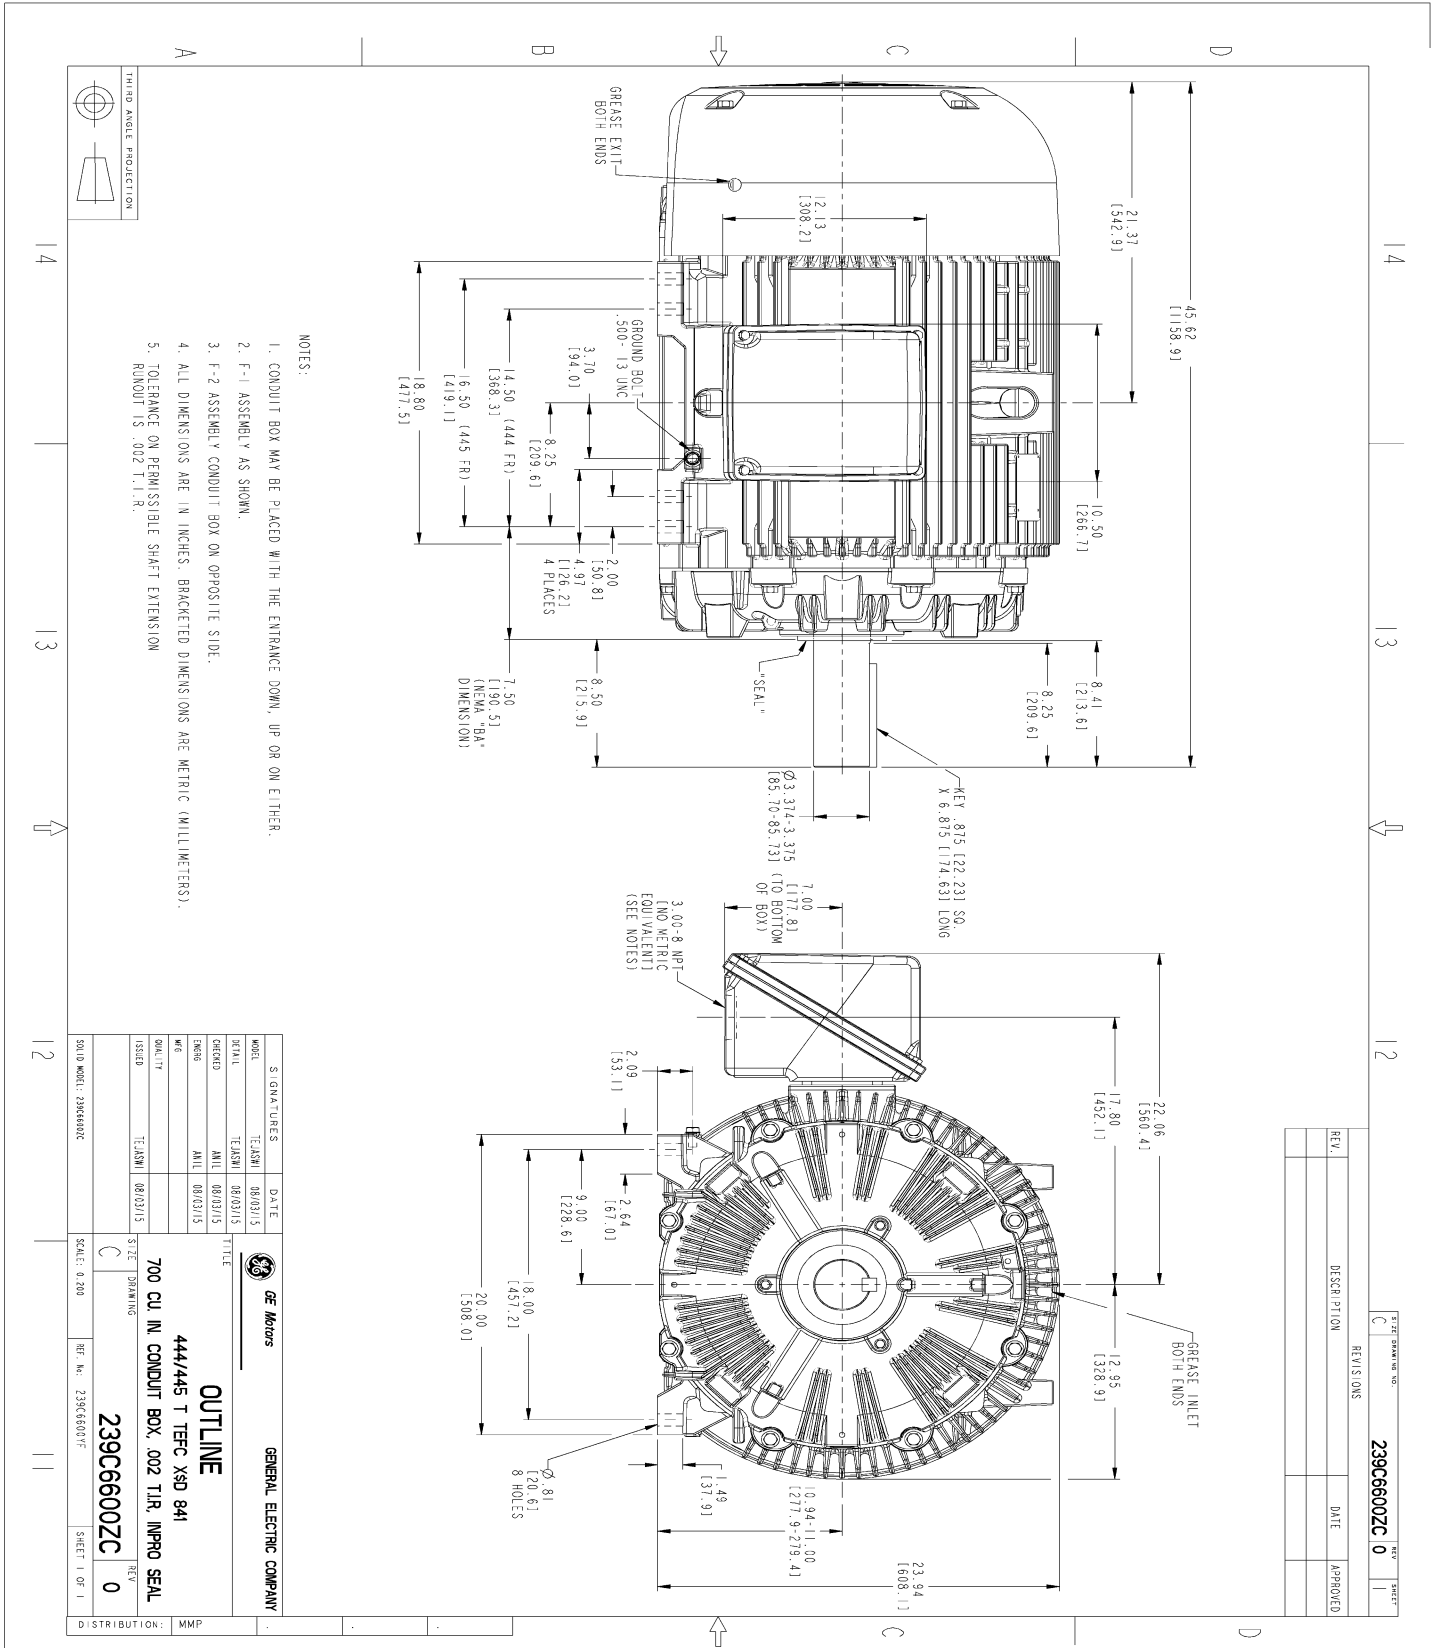


NOTES:

1. CONDUIT BOX MAY BE PLACED WITH THE ENTRANCE DOWN, UP OR ON EITHER.
2. F-1 ASSEMBLY AS SHOWN.
3. F-2 ASSEMBLY CONDUIT BOX ON OPPOSITE SIDE.
4. ALL DIMENSIONS ARE IN INCHES. BRACKETED DIMENSIONS ARE METRIC (MILLIMETERS).
5. TOLERANCE ON PERMISSIBLE SHAFT EXTENSION ROUNDOFF IS .002 T.I.R.

REV.	DESCRIPTION	DATE	APPROVED

MODEL	TEKSMI	DATE	08/03/15
SCALE	TEKSMI	08/03/15	
CHECKED	ANIL	08/03/15	
DRAWN	ANIL	08/03/15	
QUALITY	TEKSMI	08/03/15	
ISSUED			
<p><b>GENERAL ELECTRIC COMPANY</b></p> <p><b>OUTLINE</b></p> <p>444/445 T TEFC XSD 841</p> <p>700 CU. IN. CONDUIT BOX, .002 T.I.R. INPRO SEAL</p> <p>239C6600ZC</p>			
SOLID MODEL: 239C6600C		SCALE: 0.200	REF. No: 239C6600F
DISTRIBUTION: MMP		SHEET 0	SHEET 1



1 4 1 3 1 2 1 1

Marks:

**Connection Diagram**  
**GEM2034E-FIG7**



End shield Assembly		
Part Description	DE Side Part#	ODE Side Part#
End Shield	115E4355AA1	115E4355LL1
Bearing	235A2519AA01	235A2514AG01
Slinger/Inproseal	235A4575GS5	235A4575GS5

Fan & Fan Cover Assembly	
Part Description	Part#
Fan	159C7100G03
Fan Cover	128D6841AA1

Conduit & Accessories Box Assembly	
Part Description	Part#
Conduit Box	118D4408AD2

Mechanical Accessories	
Part Description	Part#
Brake	
Tachometer	