
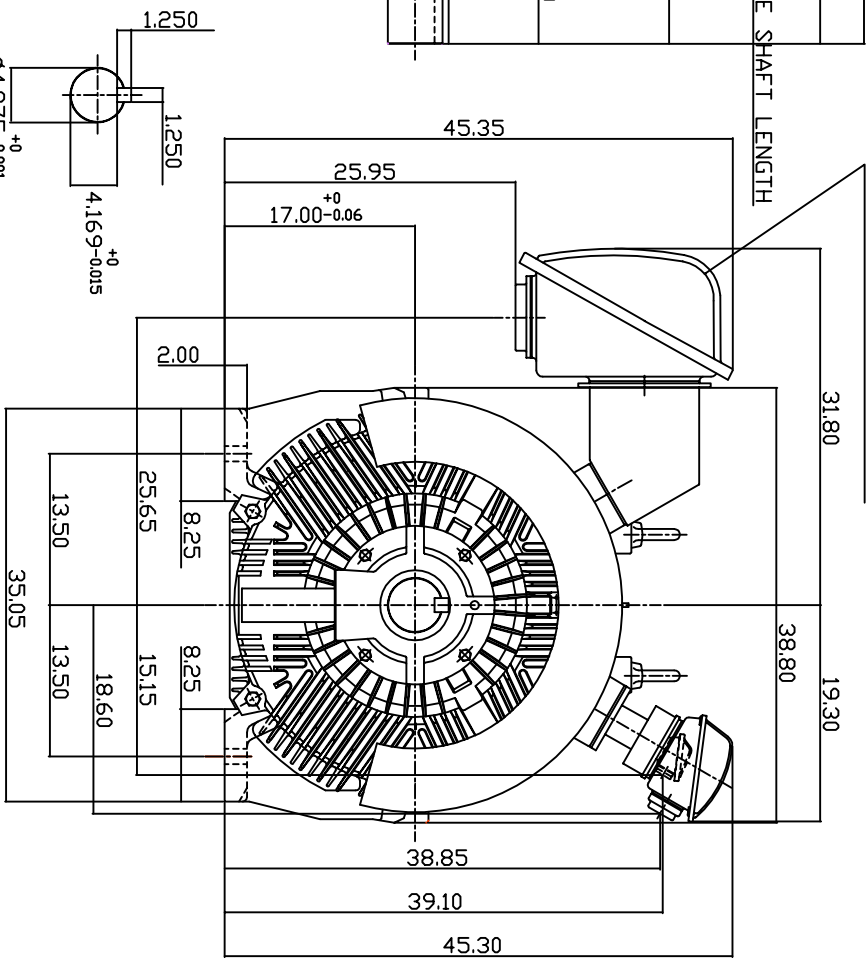


TYPE	OUTPUT		POLE	TIME RATING	VOLTAGE V	HZ	SYNSPEED R.P.M
	HP.	K.W.					
AEHGTK	600	448	8	CDNT.	2300/4160	60	900

TOTALLY ENCLOSED FAN-COOLED TYPE, SQUIRREL-CAGE ROTOR

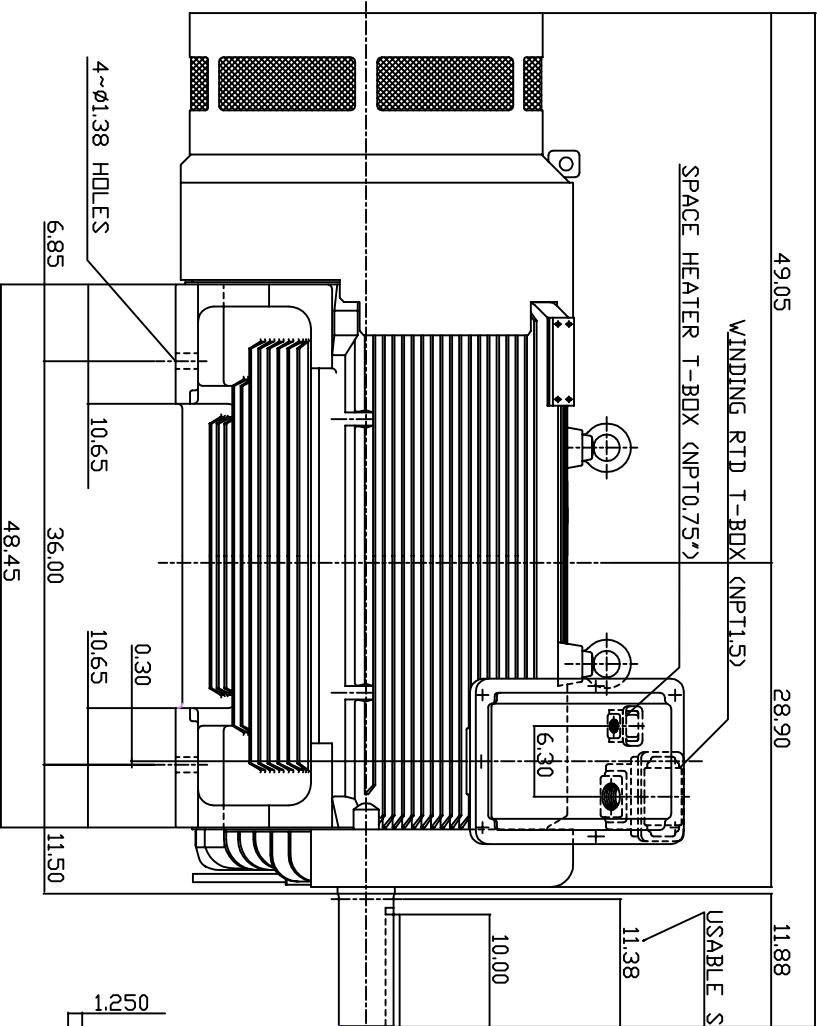

- NOTE: 1. DIMENSIONS IN INCH.  
 2. FRAME NO. 6808C  
 3. F CLASS INSULATION, S.F.1.15  
 4. FOR BELT DRIVE APPLICATIONS  
 5. WITH SPACE HEATER 120 VOLT SINGLE PHASE 300 WATTS  
 6. 100 OHM PLATINUM WINDING RTD'S 2/PHASE  
 7. BEARING SIZE: DRIVE END: NU326  
 NDN-DRIVE END: 6322  
 8. MOTOR APPROX. WEIGHT: 7900 LBS

D/W.N.	W.L.LIN	APR-17-2003
CHKD.	W.L.LIN	APR-17-2003
APPD.	C.WANG	APR-17-2003

DATE	OUTLINE DIMENSIONS
MAY 6, 2004	3-PHASE INDUCTION MOTOR
CATALOG NO. KG6008R	
DATE	REV: 00
	DWG NO. 3A040T4621

TW-66C

6 5 4 3 2 1

A B C D

A B C D

WESTINGHOUSE