
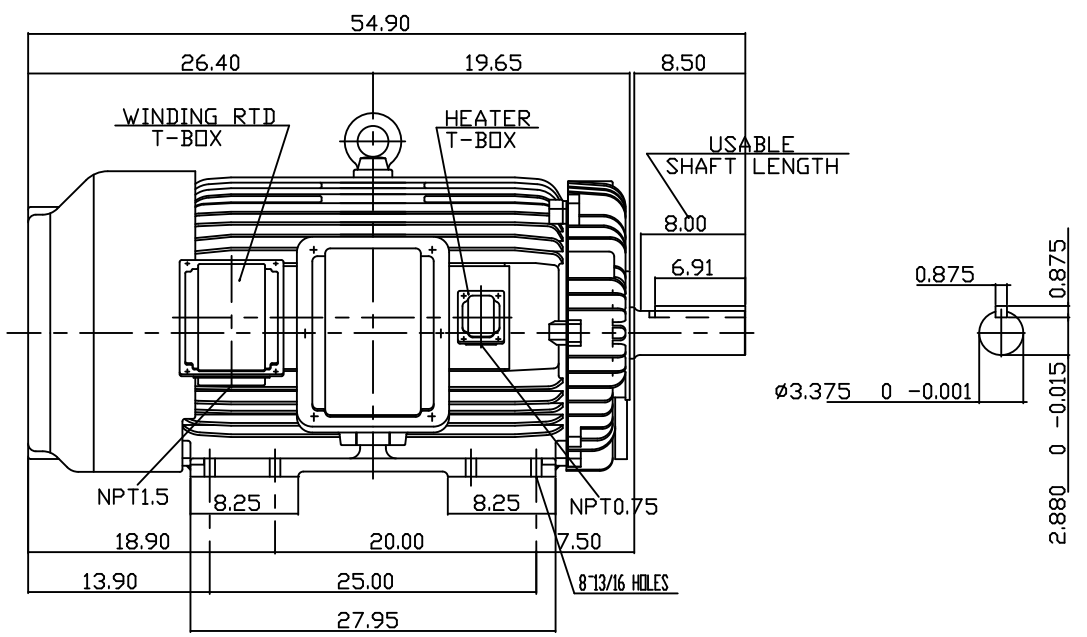


TYPE	OUTPUT		POLE	TIME RATING	VOLTAGE V	Hz	SYN.SPEED R.P.M
	HP.	KW.					
AEHGK	125	93.3	8	CONT.	2300/4160	60	900

TOTALLY ENCLOSED FAN-COOLED TYPE, SQUIRREL-CAGE ROTOR

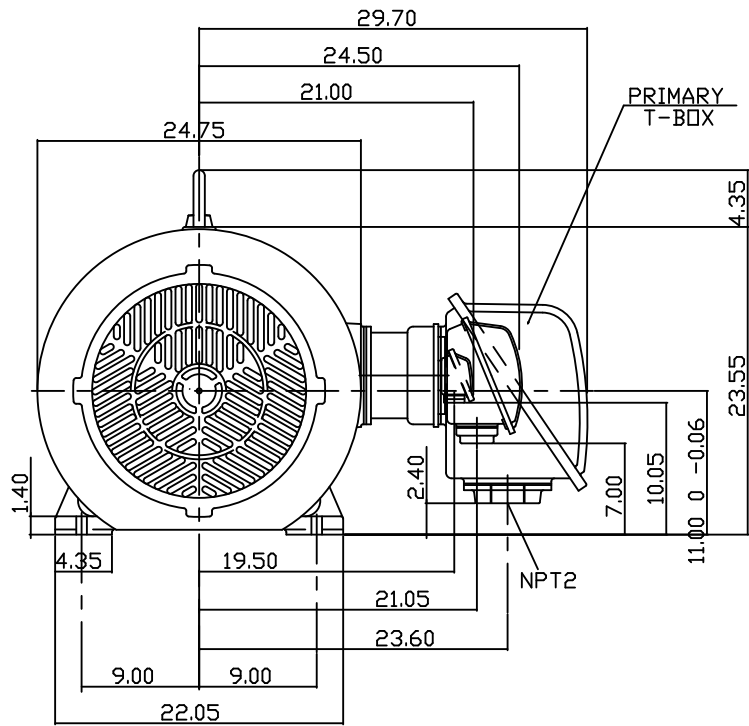

NOTE:

1. DIMENSIONS IN INCH
2. FRAME NO. 449T
3. F CLASS INSULATION, S.F.1.15
4. FOR DIRECT FLEXIBLE COUPLING
5. WITH WINDING RTD & SPACE HEATER
6. ENCLOSURE: IP54
7. BEARING SIZE DRIVE END: NU320
NON-DRIVE END: 6316
8. APPROX. WEIGHT: 2700 LBS

TW-56C

DATE: MAY 13, 2013	OUTLINE DIMENSIONS
CATALOG # KG1258R	3-PHASE INDUCTION MOTOR
DWN. C. COOK 09-20-2013	DWG NO. REV: 00
TEC Westinghouse	
3B040C101	