


TYPE	OUTPUT		POLE	TIME RATING	VOLTAGE V	Hz	SYN. SPEED R.P.M
	HP	KW					
AEJHTK	1250	930	4	CONT.	2300/4160	60	1800

TOTALLY ENCLOSED FAN COOLED TYPE. SQUIRREL CAGE ROTOR

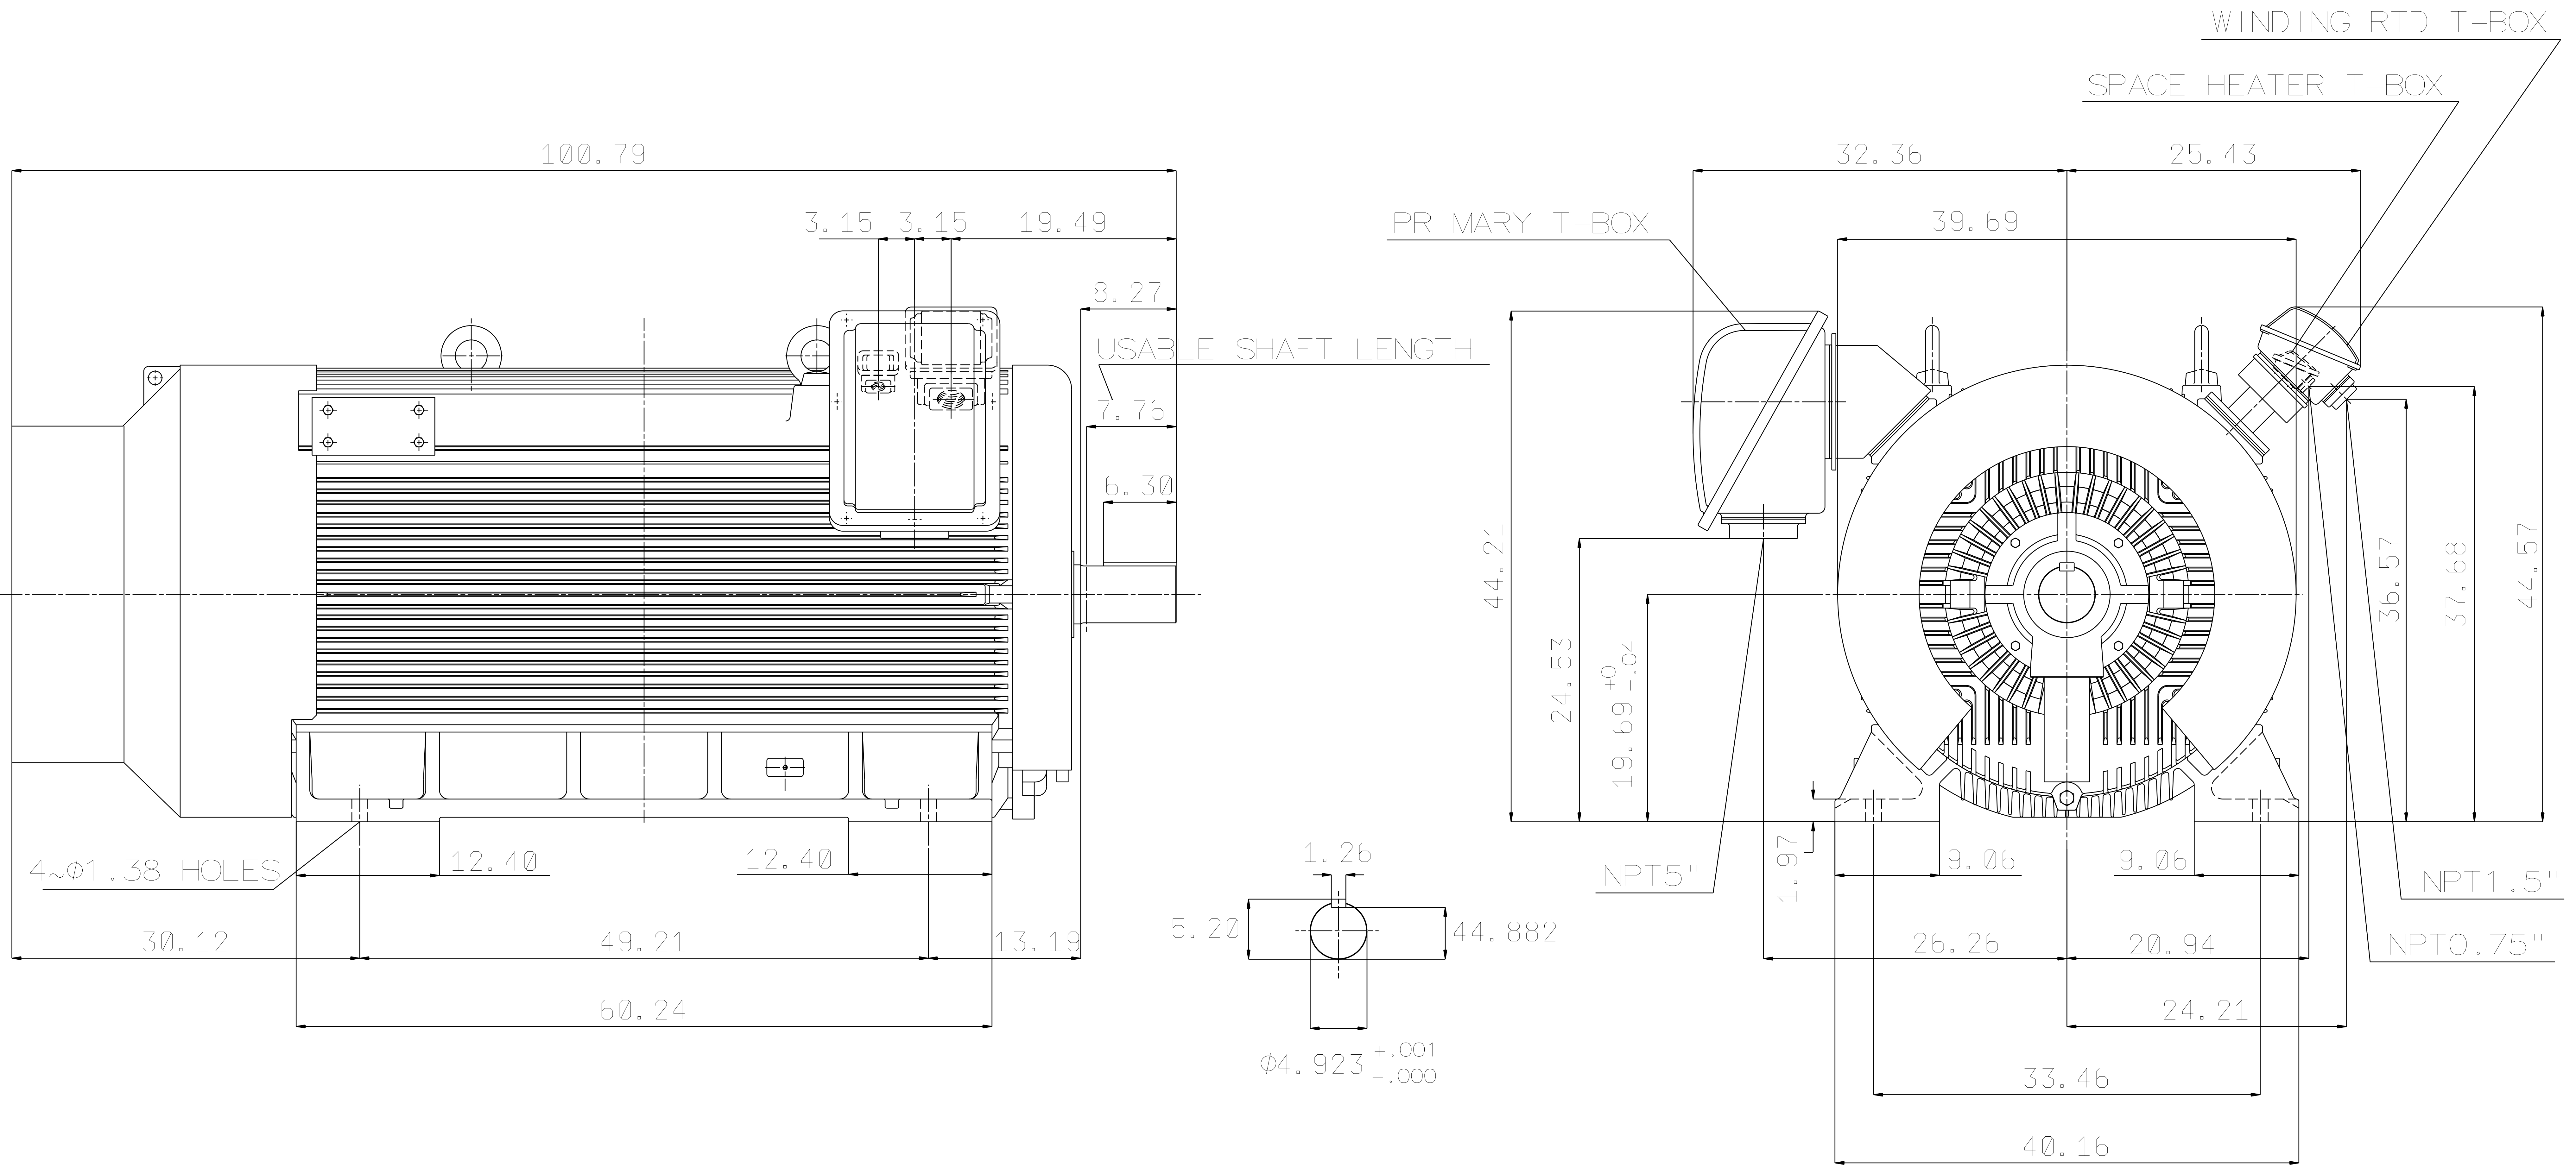

1. DIMENSIONS IN INCHES
2. FRAME NO. 500C
3. F CLASS INSULATION
4. FOR DIRECT FLEXIBLE COUPLING
5. WITH SPACE HEATER 120 VOLT SINGLE PHASE 400 WATTS
6. WITH 100 OHM PLATINUM WINDING RTD'S 2/PHASE
7. BEARING SIZE: DRIVE END: 6326  
NON-DRIVE END: 6324M/C3 VL024
8. MOTOR APPROX. WEIGHT: 5100 KGS

TW-66C

DATE MAY 7, 2004	OUTLINE DIMENSIONS 3-PHASE INDUCTION MOTOR
CATALOG NO. JH12504	

DWN.	W.L.L IN	APR. 22. 2003
CHKD.	W.L.L IN	APR. 22. 2003
APPD.	C. WANG	APR. 22. 2003

TEC Westinghouse

DWG NO. REV: 00  
3A040T4093