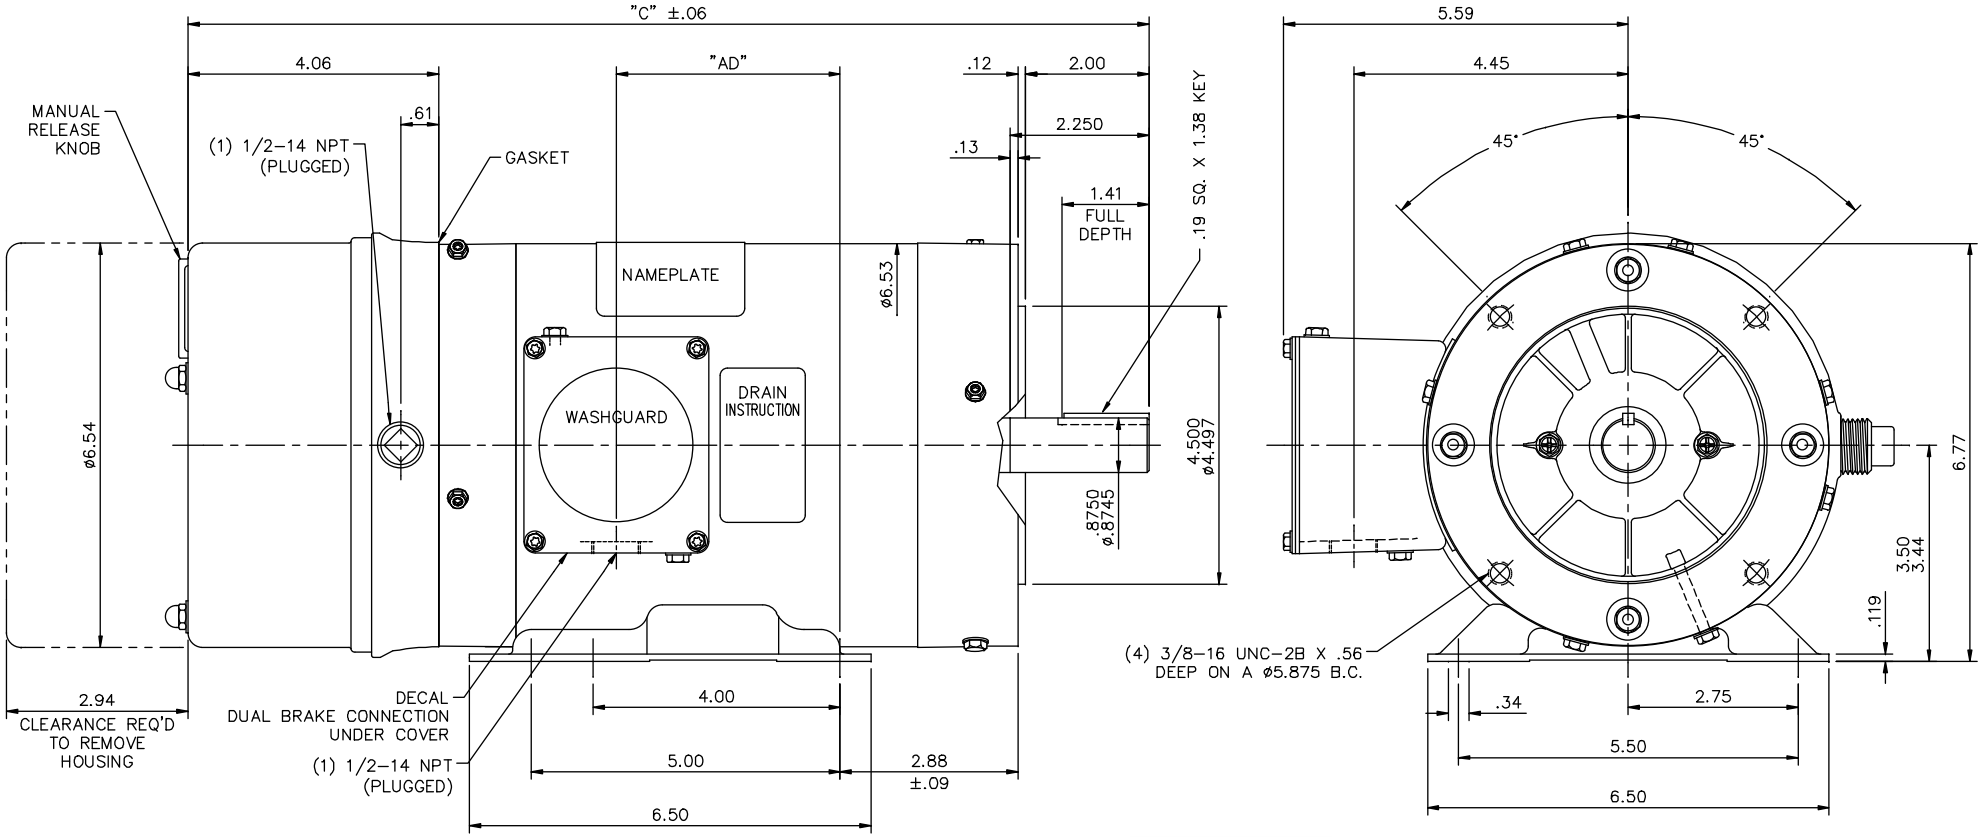

DASH NO.	"C"	"AD"
700	16.06	4.44
750	16.56	4.94
800	17.06	5.44

MAXIMUM FACE RUNOUT TO BE .004 TIR
MAXIMUM PILOT ECCENTRICITY .004 TIR
PERMISSIBLE SHAFT RUNOUT .002 TIR

WASHGUARD FEATURES:

1) SHAFT SEAL & V-RING
2) DRAIN HOLES IN ENDBELLS & CONDUIT BOX
3) STAINLESS STEEL SHAFT, HARDWARE & NAMEPLATE
4) GASKETS THROUGHOUT

NO.	REVISION	BY & DATE	CHK
02	ADDED DRAIN SCREWS PER ECR-0034519	ARV 8/8/13	SK
01	REV'D DRAIN HOLE SCREW LOC'NS IN L.E ENDBELL TO MATCH ENDBELL MACHINING	BJB 03/18/04	

TOLERANCES UNLESS SPECIFIED: DEC. .X ±.1; .XX ±.03; .XXX ±.005; .XXXX ±.0005; ANG ±1/2°

LEESON ELECTRIC MOTORS GEARMOTORS AND DRIVES

TITLE: OUTLINE – 140TC FRAME TENV – RIGID "C"
MAT'L. WASHGUARD BRAKE MOTOR
FINISH
CAD FILE 028573
RFP
DIST

DRAWN	LST 1/13/04
CHK	RW 1/15/14
APPD	KH 1/15/04
SCALE	1=2
REF	116469
FMF	121616
PREV	

SIZE B | DRAWING NO. 028573 | REV. 02

THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED
THIS IS AN ELECTRONICALLY GENERATED DOCUMENT – DO NOT SCALE THIS PRINT

8/8/2013 4:27:26 PM - Converted by Connexus