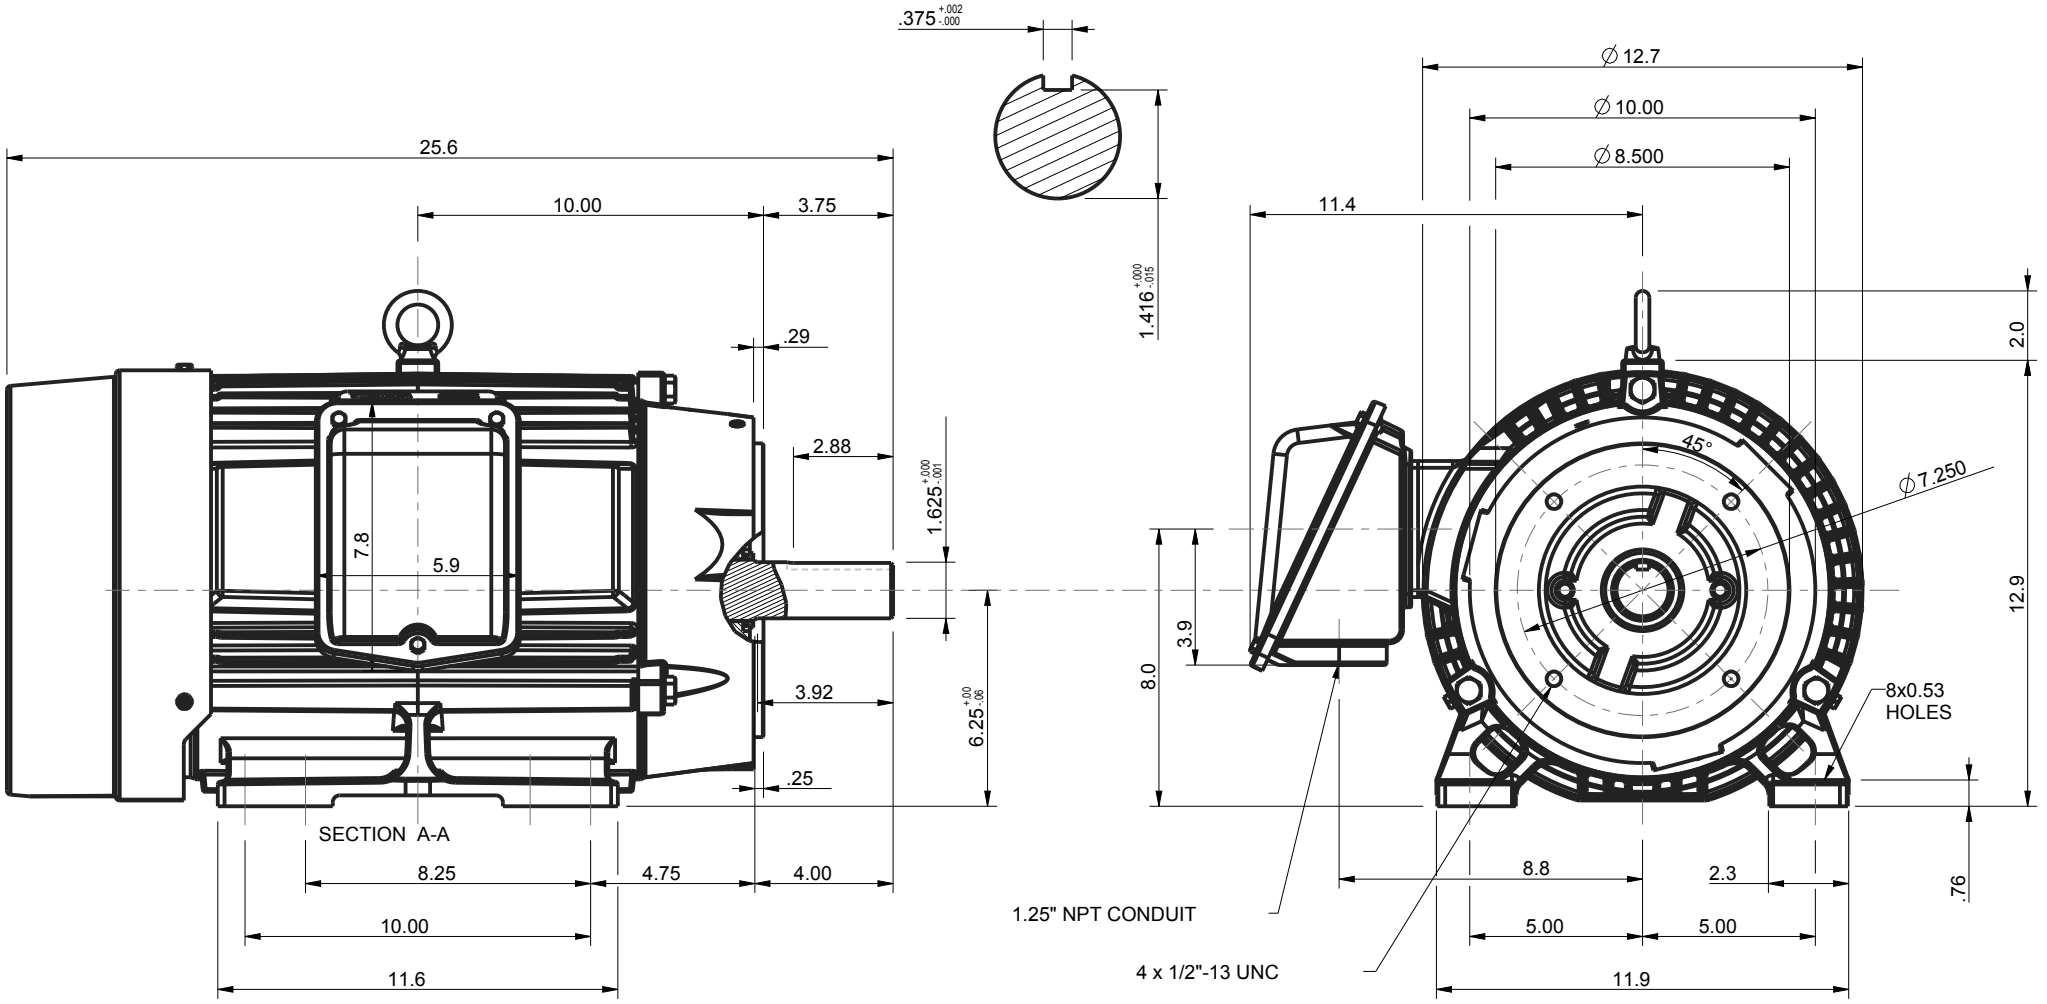


| UNITS: INCHES | NOTES: |
|---|---|
| ROTATION FROM NDE | 1. MAIN CONDUIT BOX MAY BE ROTATED IN 90° INCREMENTS |
| X CCW  CW | 2. STANDARD PRODUCT USES BI-DIRECTIONAL FAN. OPPOSITE ROTATION AVAILABLE ONLY BY CONNECTION CHANGE. |
| | 3. KEY DIMENSIONS EQUAL 0.375"x 0.375"x 2.88" (MOTOR SUPPLIED WITH KEY) |

TOSHIBA RESERVES THE RIGHT TO MAKE CHANGES OF TECHNICAL IMPROVEMENT AND THE DATA MAY CHANGE WITHOUT NOTICE

DO NOT USE FOR CONSTRUCTION, INSTALLATION, OR APPLICATION PURPOSES UNLESS THE DRAWING IS MARKED AS CERTIFIED

☐ PRELIMINARY

☒ CERTIFIED

TOSHIBA

www.toshiba.com/tic

TOSHIBA INTERNATIONAL CORPORATION

SEVERE DUTY EQP Global SD

# TOTALLY ENCLOSED FAN COOLED FOOTED C-FACED (NEMA BA) 3 PHASE INDUCTION MOTOR

254TC-256TC F1 ASSEMBLY

DRAWING #: MDSLV005-04

REV. DATE: 06/29/18 REV. #: 3 PER.: M. O'DOWD

REV. DESCRIP.: