

Product Information Packet

July 2, 2017

Data shown is for the current revision model #. Ensure your nameplate model # matches.

Model Number:	5KS364XAJ6708A
Catalog Number:	V4806
Instruction Manual:	GEK-95351
Connection Diagram:	GEM2034E-FIG7
Outline Drawing:	148CB36IPHRBCLA0001

Accessory Connection Diagrams			
Bearing Thermocouple:	None	Heater:	None
RTD:	None	Thermistor:	None
Thermostat:	None	Winding Thermocouple:	None
Bearing RTD:	None		

Table of Contents

Specification	01
Performance Characteristics	02
Outline Drawing	03
Connection Drawing(s)	04
Spare parts	05



Marks:

MODEL NUMBER:	5KS364XAJ6708A	Estimated Weight:	1230 Lbs
Outline Drawing:	148CB36IPHRBCLA0001	Time Rating:	CONT
Connection Diagram:	GEM2034E-FIG7	Enclosure:	TEFC
Instruction Book:	GEK-95351	Encl Construction:	841
Design Code:	36BD1188AB	Ambient Max(°C):	40
Type:	KS	Alt Ambient Max(°C):	--
Frame:	L364LP16	Insulation Class:	H
Phases:	3	NEMA Design:	B
Poles:	4	Nominal Efficiency:	95.0 %
Output Power:	60HP 44.4KW	Guaranteed Efficiency:	94.1 %
RPM:	1780	3/4 Load Efficiency:	95.2 %
Voltage:	460	KVA Code:	G
Hertz:	60	Max KVAR:	20.9
Amps - FL:	71.7	Power Factor:	82.5
Service Factor:	1.15	Bearing - DE:	6213C3
Alt Service Factor:	--	Bearing - ODE:	235A2523AD01

Enclosure is Totally Enclosed Fan-Cooled

Stamped Nameplate Notes:

EXCEPTIONS TO IEEE-STD-841-2009:
ALUMINIUM FAN BACK PLATE
VERTICAL 841
DE BRG 65BC02J30, ODE BRG 100BT02MD00
INVERTER DUTY PER NEMA MG1 PART 31
ALTERNATE RATING FOR PWM CONTROL:1.0SF 40C AMBIENT
VAR TORQUE RANGE 0-60 HZ
GE SELF DECLARED CLASS I DIV 2 MOTOR
MAX EXPOSED INTERNAL AND EXTERNAL SURFACE
TEMPERATURES UNDER USUAL SERVICE CONDITIONS
AT 1.00 S.F. DO NOT EXCEED 200 DEG C
API 610 12TH EDITION SHAFT DIMENSIONS
INLINE MOTOR

Additional Information:

4 POLE,VERT SOLID SHAFT INLINE (1D1U)
PAINTED FRAME ID & SHAFT,
FAN COVER INSIDE & ODE E/S OUTSIDE
346 CU IN - 3.00" NPT
BEARING LIFE 8760 HRS AT 5473 LB THRUST
BEARING LIFE 26280 HRS AT 3711 LB THRUST
INPRO SEAL LOWER END
OIL RESISTANT SLEEVING ON LEADS
ROUTINE TEST REPORT AND 5 POINT VIBRATION TEST
REPORT INCLUDED IN C/B
COPPER WASHER UNDER HEADS OF BEARING CAP BOLTS,
APPLY TITE-SEAL (A50CD427A) ON BEARING CAP SCREWS,

RABBETS AND PLUG THREADS.
STAINLESS STEEL T-DRAINS
FRAME GROUND PAD
ACTUAL EFFICIENCY = 94.5%
RCF: 2760 CPM AT C/BOX SIDE, 2760 CPM AT
90 DEG FROM C/ BOX SIDE
CG: 17.65 IN FROM P-BASE FACE

Performance Characteristics

1st Winding 1st Connection

Design: 36BD1188AB

Marks:


LOAD %	125.0	115.0	100.0	75.0	50.0	25.0	0.0
% EFF	93.86	94.07	94.5	94.37	93.66	90.18	0.00
% PF	84.37	83.82	82.46	77.94	67.91	45.71	4.36
AMPS	88.64	81.9	71.88	57.26	44.14	34.06	29.16

TORQ(FL)#FT	176.83	TORQ(LR)%FL	160.17	TORQ(BD)%FL	259.73
AMPS(LR)	412.9	PF AT START	0.31		

This motor is capable of two cold or one hot start with a maximum connected load inertia of 1174 Lb-Ft Sq (49.43 Kg-meter Sq)at 100% voltage, where the load torque varies with the square of the speed. Acceleration time with maximum inertia and the above load type is 32 seconds. Safe stall time at 100% voltage is 75 seconds cold, 39 seconds hot. Rotor inertia is 12.22 Lb-Ft Sq (0.51 Kg-meter Sq).


Open Circuit A-C:	0.6	Short Circuit D-C:	0.024
Short Circuit A-C:	0.035	X/R Ratio:	9.186
Stator Slots:	60	Rotor Slots:	50

Speed Torque Current Curve (First Connection, First Speed)

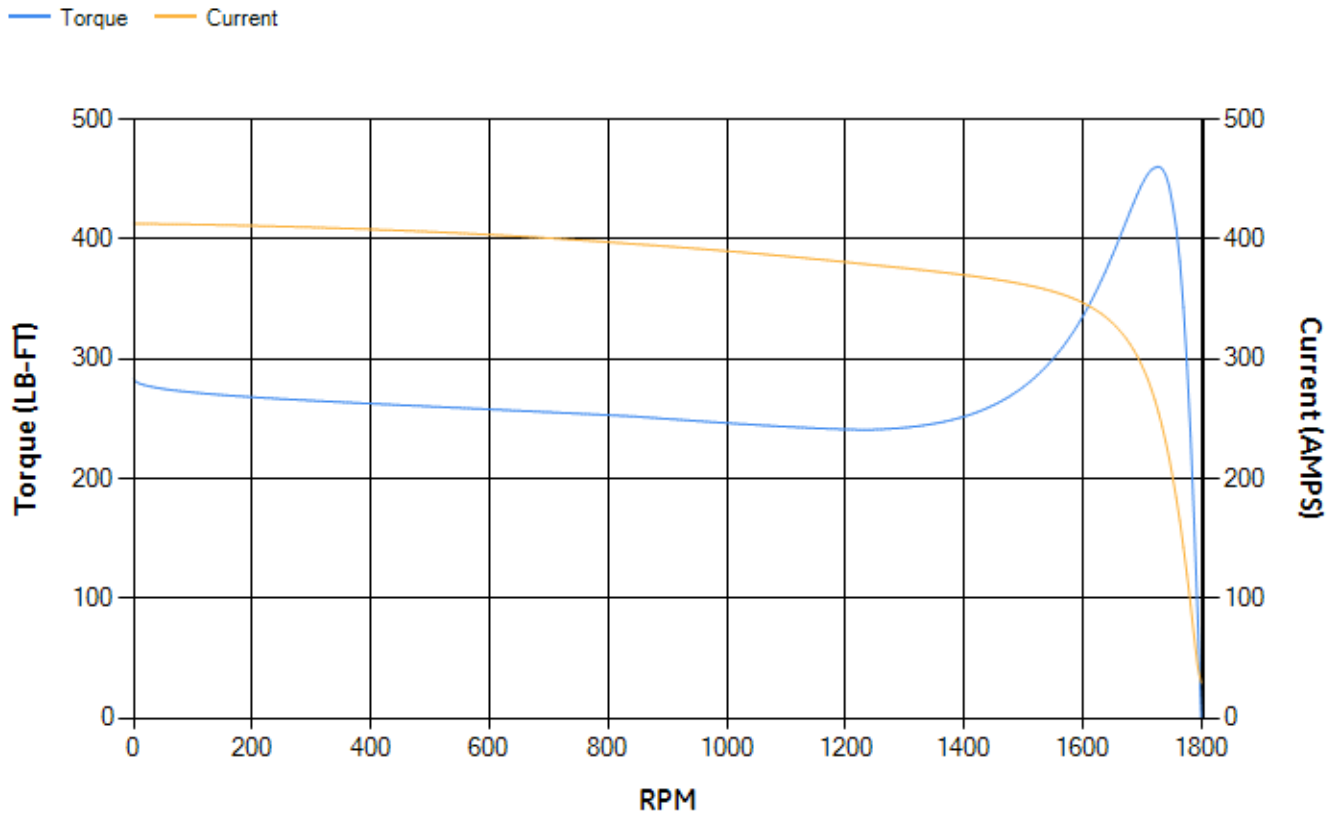

Marks:

Connection Diagram
GEM2034E-FIG7

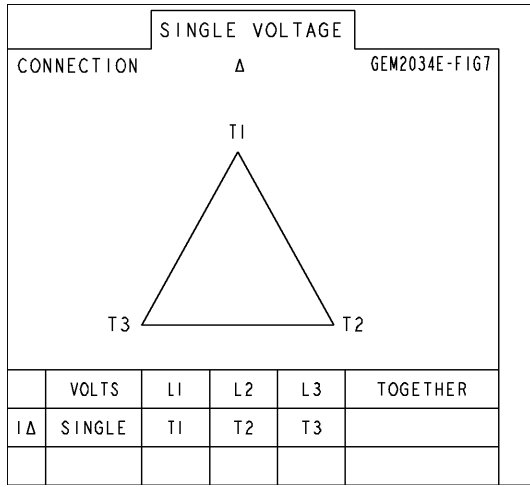

End shield Assembly		
Part Description	DE Side Part#	ODE Side Part#
End Shield	115E8258AC1	115E8259LA1
Bearing	235A2517AA01	235A2523AD01
Slinger/Inproseal	235A4575GE10	

Fan & Fan Cover Assembly	
Part Description	Part#
Fan	153B1884G02
Fan Cover	128D6844AA1

Conduit & Accessories Box Assembly	
Part Description	Part#
Conduit Box	149C4429AA2

Mechanical Accessories	
Part Description	Part#
Brake	
Tachometer	