TYPE	OUTPUT		POLE	TIME RATING	VOLTAGE V	Hz	SYN.SPEED R.P.M
	HP.	kW.					
AEHE	200	149	8	CONT.	575	60	900

TOTALLY ENCLOSED FAN-COOLED TYPE, SQUIRREL-CAGE ROTOR

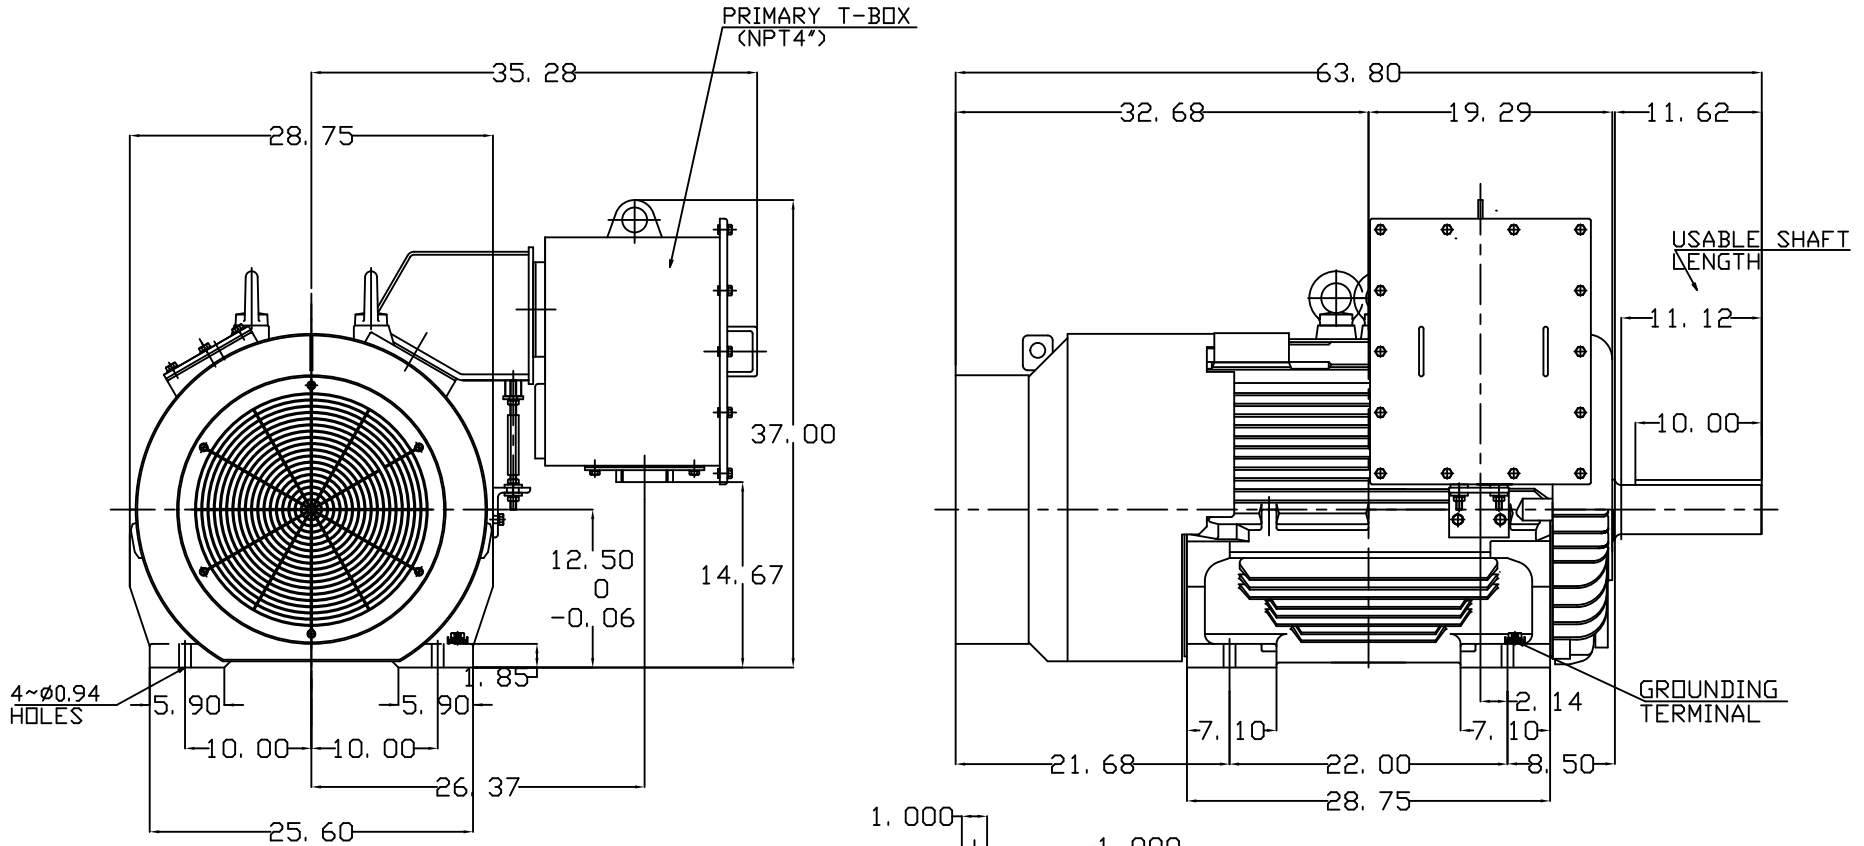

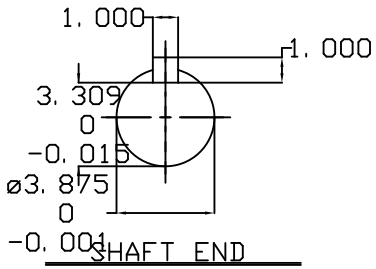

SHAFT END
(ENLARGED VIEW)

NOTE:
1. DIMENSIONS IN inch
2. FRAME NO. 5007B
3. F CLASS INSULATION, S.F.1.15
4. FOR DIRECT DRIVE APPLICATION
5. ENCLOSURE: IP55
6. BEARING SIZE: DRIVE-END 6324
   OPP. DRIVE-END 6320
7. MOTOR APPROX. WEIGHT: 3400 lb

DWN.	Y.DU	MAR-19-2014
CHKD.	W.CHENG	MAR-28-2014
APPD.	C.SHIH	MAR-28-2014

DATE

CATALOG # E20085

OUTLINE DIMENSIONS
3-PHASE INDUCTION MOTOR

TECO Westinghouse

DWG NO. 4A040Y985 REV:00