

Product Information Packet

November 7, 2016

Data shown is for the current revision model #. Ensure your nameplate model # matches.

Model Number:	5CD153JA001B023
Catalog Number:	D423
Instruction Manual:	GEH-3967N
Connection Diagram:	36A167760CA501
Outline Drawing:	36A167932AA002

Accessory Connection Diagrams			
Bearing Thermocouple:	None	Heater:	None
RTD:	None	Thermistor:	None
Thermostat:	None	Winding Thermocouple:	None
Bearing RTD:	None		

Table of Contents	
Specification	01
Outline Drawing	02
Connection Drawing(s)	03

Marks:

MODEL NUMBER:	5CD153JA001B023	Enclosure Mtg Assem:	36A167770AA401
Outline Drawing:	36A167932AA002	Instruction Book:	GEH-3967N
Connection Diagram:	36A167760CA501	RPM:	1750/2300
Horsepower:	10	Armature Amps:	17.2
Armature Volts:	500	Type:	CD219AT
Wound:	SHUNT	Power Supply Code:	C
Enclosure:	DPFG	Insulation Class:	F
Duty:	CONT	Ambient Max (°C):	40 C
Rating Code:	153J1340-00	Field Volts:	300/150
K(V):	2.39 Cemf volts/Radian/Sec	WK2:	1.49Lb Ft2
K(T):	1.74 Ft/Amp	Year of Manufacture:	2016
Minimum Ambient:	0 C	Max Altitude:	3300 Ft

Resistances at 25 Degrees C :

Shunt Field:	158 OHMS
Armature:	1.9109 OHMS
Commutator Field:	.6474 OHMS

Inductances:

Armature Circuit Total:	33.140 mH Saturated
Shunt Field:	82.0 Henries Unsaturated

Shunt Field Data:


Shunt Field Current(1): 1.35 AMPS at Rated Load and 1750 RPM
 Shunt Field Current(2): 1.15 AMPS at Rated Load and 1933 RPM
 Shunt Field Current(3): .88 AMPS at Rated Load and 2300 RPM

Additional Machine Notes:

DRIPPROOF FULLY GUARDED - BALL BEARINGS
 CONDUIT BOX ON RIGHT HAND SIDE FACING COMMUTATOR END
 STANDARD SHAFT DRIVE END ONLY - WITH FEET
 WITH:
 CSA STAMP
 THERMOSTAT- NORMALLY CLOSED, AC RATING- 600V MAX-
 .5A, 250V-1.5A, OR 125V-3A, DC RATING- 30V MAX-
 1.5A. MAXIMUM CURRENT BASED ON INDUCTIVE LOADS UP
 TO AND INCLUDING NEMA NO.5 CONTACTOR.



Marks:

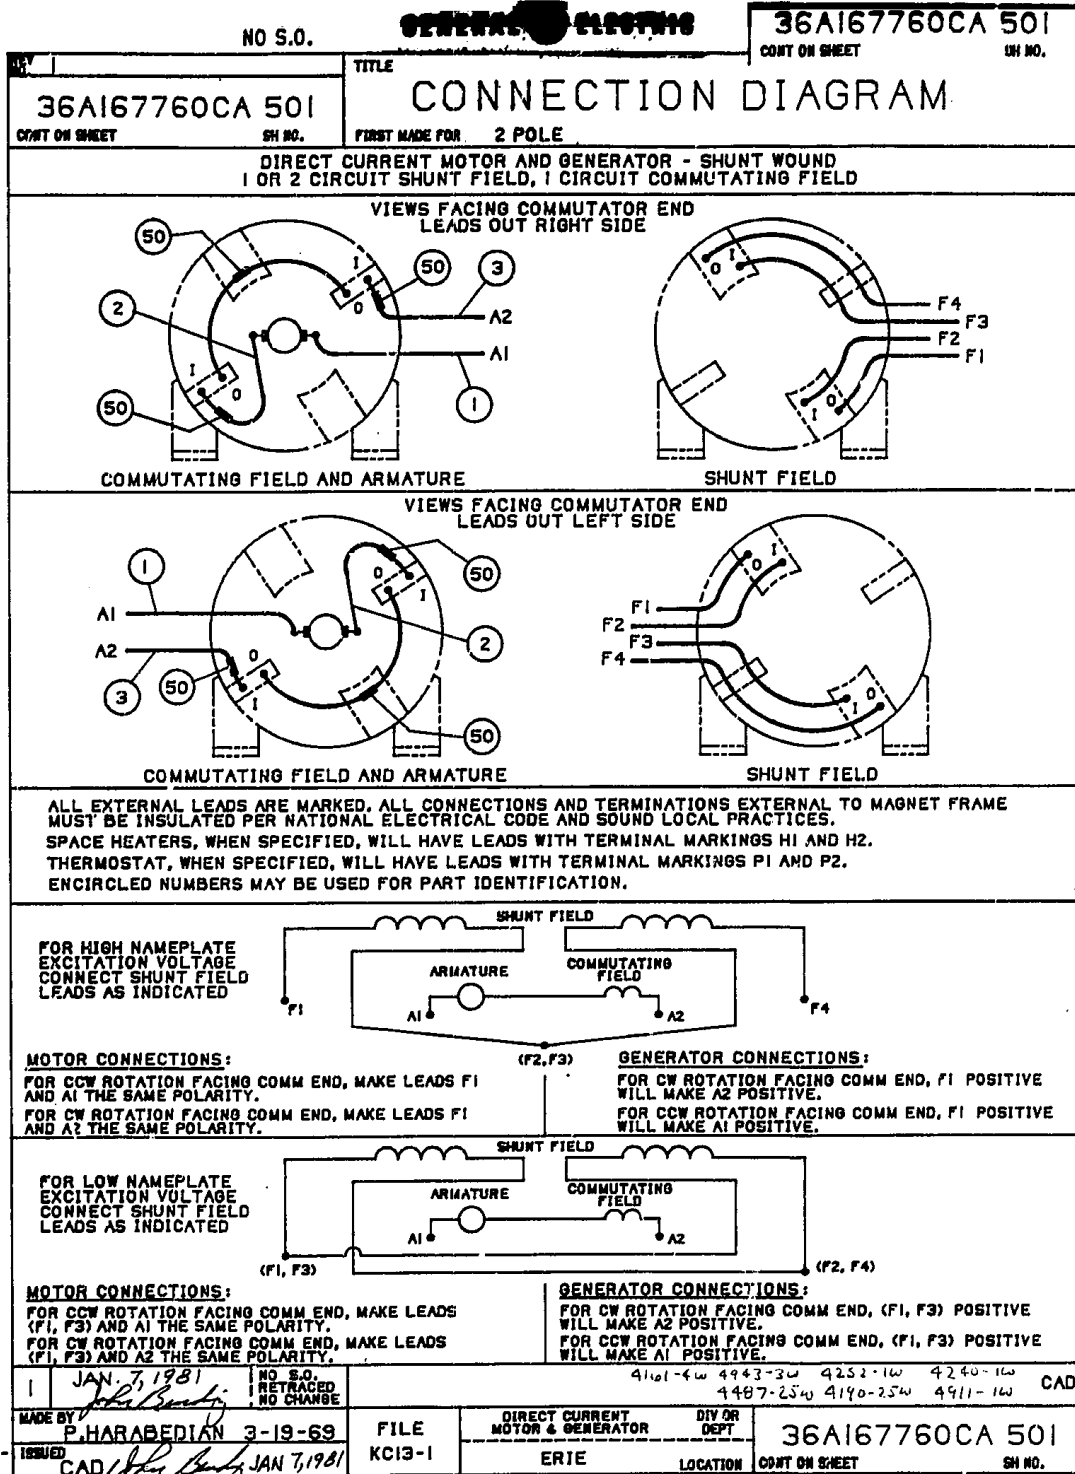

DGRM 36A167760CA501R01
PLT .64 SCL