

Product Information Packet

November 9, 2016

Data shown is for the current revision model #. Ensure your nameplate model # matches.

Model Number:	5KS449SAA254D1
Catalog Number:	M9907
Instruction Manual:	GEI-56128
Connection Diagram:	GEM2034E-FIG20
Outline Drawing:	239C6800FR

Accessory Connection Diagrams			
Bearing Thermocouple:	None	Heater:	None
RTD:	None	Thermistor:	None
Thermostat:	None	Winding Thermocouple:	None
Bearing RTD:	None		

Table of Contents

Specification	01
Performance Characteristics	02
Outline Drawing	03
Connection Drawing(s)	04
Spare parts	05



Marks:

MODEL NUMBER:	5KS449SAA254D1	Estimated Weight:	3030 Lbs
Outline Drawing:	239C6800FR	Time Rating:	CONT
Connection Diagram:	GEM2034E-FIG20	Enclosure:	TEFC
Instruction Book:	GEI-56128	Encl Construction:	X\$D
Design Code:	49BD1242B	Ambient Max(°C):	40
Type:	KS	Alt Ambient Max(°C):	65
Frame:	449T	Insulation Class:	H
Phases:	3	NEMA Design:	B
Poles:	4	Nominal Efficiency:	96.2 %
Output Power:	300HP 222KW	Guaranteed Efficiency:	95.8
RPM:	1790	3/4 Load Efficiency:	96.2
Voltage:	575	KVA Code:	G
Hertz:	60	Max KVAR:	64.2
Amps - FL:	264.0	Power Factor:	88.5
Service Factor:	1.15	Bearing - DE:	6318ZC3
Alt Service Factor:	1.00	Bearing - ODE:	6318ZC3

Enclosure is Totally Enclosed Fan-Cooled

Stamped Nameplate Notes:

FOR DIRECT COUPLED LOAD ONLY
 STAMP NP249A5564P051 AS BELOW:
 MODEL:5KS449SAA254D1 S/N: XXX
 CSA CERTIFIED CSA09.2216219 FOR EX NA IIC 200 C GC
 CL 1 ZONE2 AEX NA IIC 200C;CL 1 DIV2 GRP ABCD 200C
 IN -40C <= AMB <= 40C, 1.0 SF ON SINE-WAVE PWR
 SURF TEMP 260C AT 1.25SF ON SINE-WAVE PWR
 OR 200 C VT OR 230 C CT OR 200 C CHP PWM CONTROL
 ALTERNATE RATING FOR PWM CONTROL 1.0SF 40C AMB
 VT 0-60 HZ, CT 30-60 HZ, CHP 60-75 HZ.

Additional Information:

4P - T EXTN - SPLIT LEAD
 1260 CU IN - 2(4.00" NPT)
 C/B GRD PLATE
 OIL RESISTANT SLEEVING ON LEADS
 F1 MOUNTING

Performance Characteristics

1st Winding 1st Connection

Design: 49BD1242B

Marks:


LOAD %	125.0	115.0	100.0	75.0	50.0	25.0	0.0
% EFF	95.66	95.84	96.26	96.23	95.91	93.85	0.00
% PF	88.72	88.76	88.48	86.56	80.65	61.76	4.43
AMPS	330.85	303.65	263.76	202.25	145.19	96.88	71.67

TORQ(FL)#FT	879.83	TORQ(LR)%FL	129.27	TORQ(BD)%FL	252.39
AMPS(LR)	1601.17	PF AT START	0.23		

This motor is capable of two cold or one hot start with a maximum connected load inertia of 8378 Lb-Ft Sq (352.71 Kg-meter Sq)at 100% voltage, where the load torque varies with the square of the speed. Acceleration time with maximum inertia and the above load type is 66 seconds. Safe stall time at 100% voltage is 147 seconds cold, 79 seconds hot. Rotor inertia is 131.78 Lb-Ft Sq (5.55 Kg-meter Sq).


Open Circuit A-C:	1.78	Short Circuit D-C:	0.038
Short Circuit A-C:	0.072	X/R Ratio:	14.196
Stator Slots:	72	Rotor Slots:	58

Speed Torque Current Curve (First Connection, First Speed)

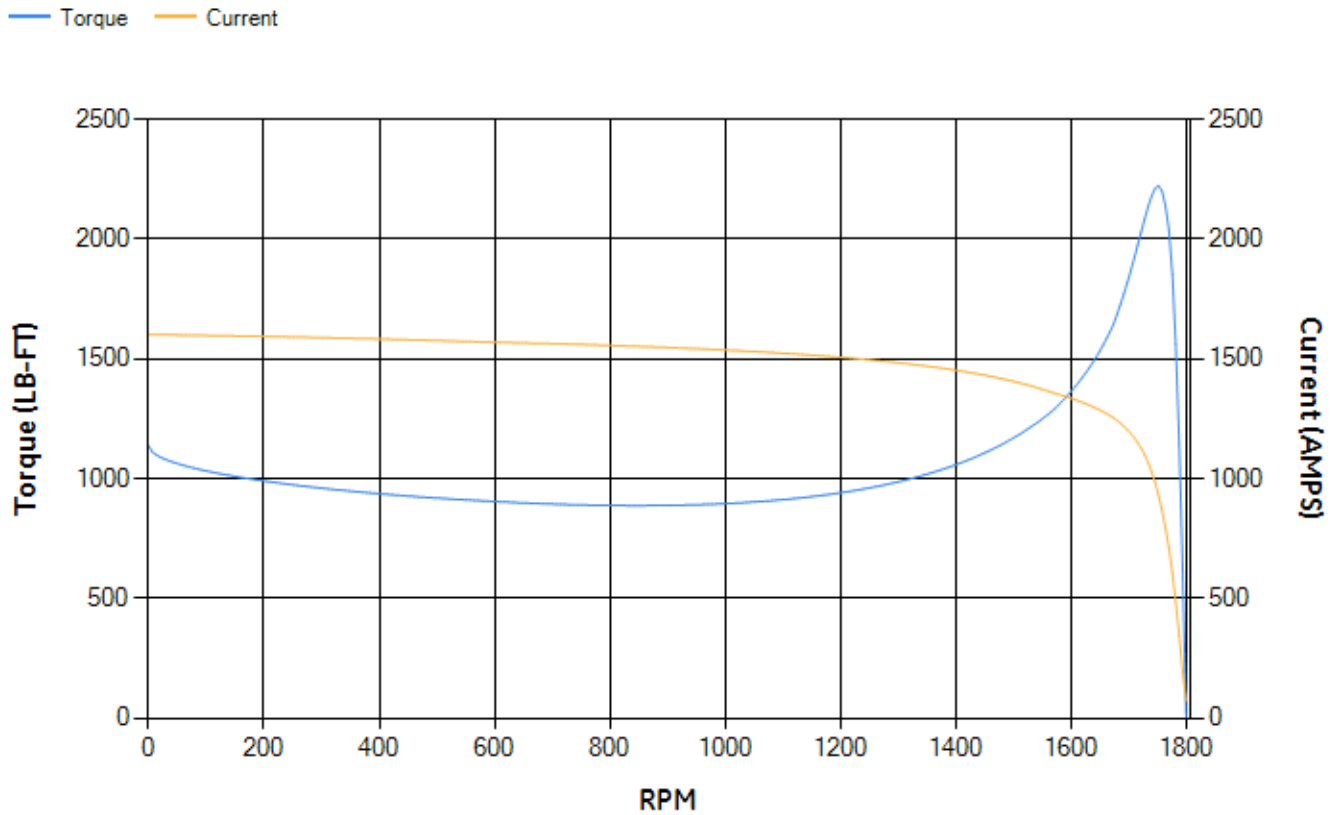

NAME: 501073830 OBJECT: 239C6800FR DATE: 05-Jul-06 15:15:17

Marks:

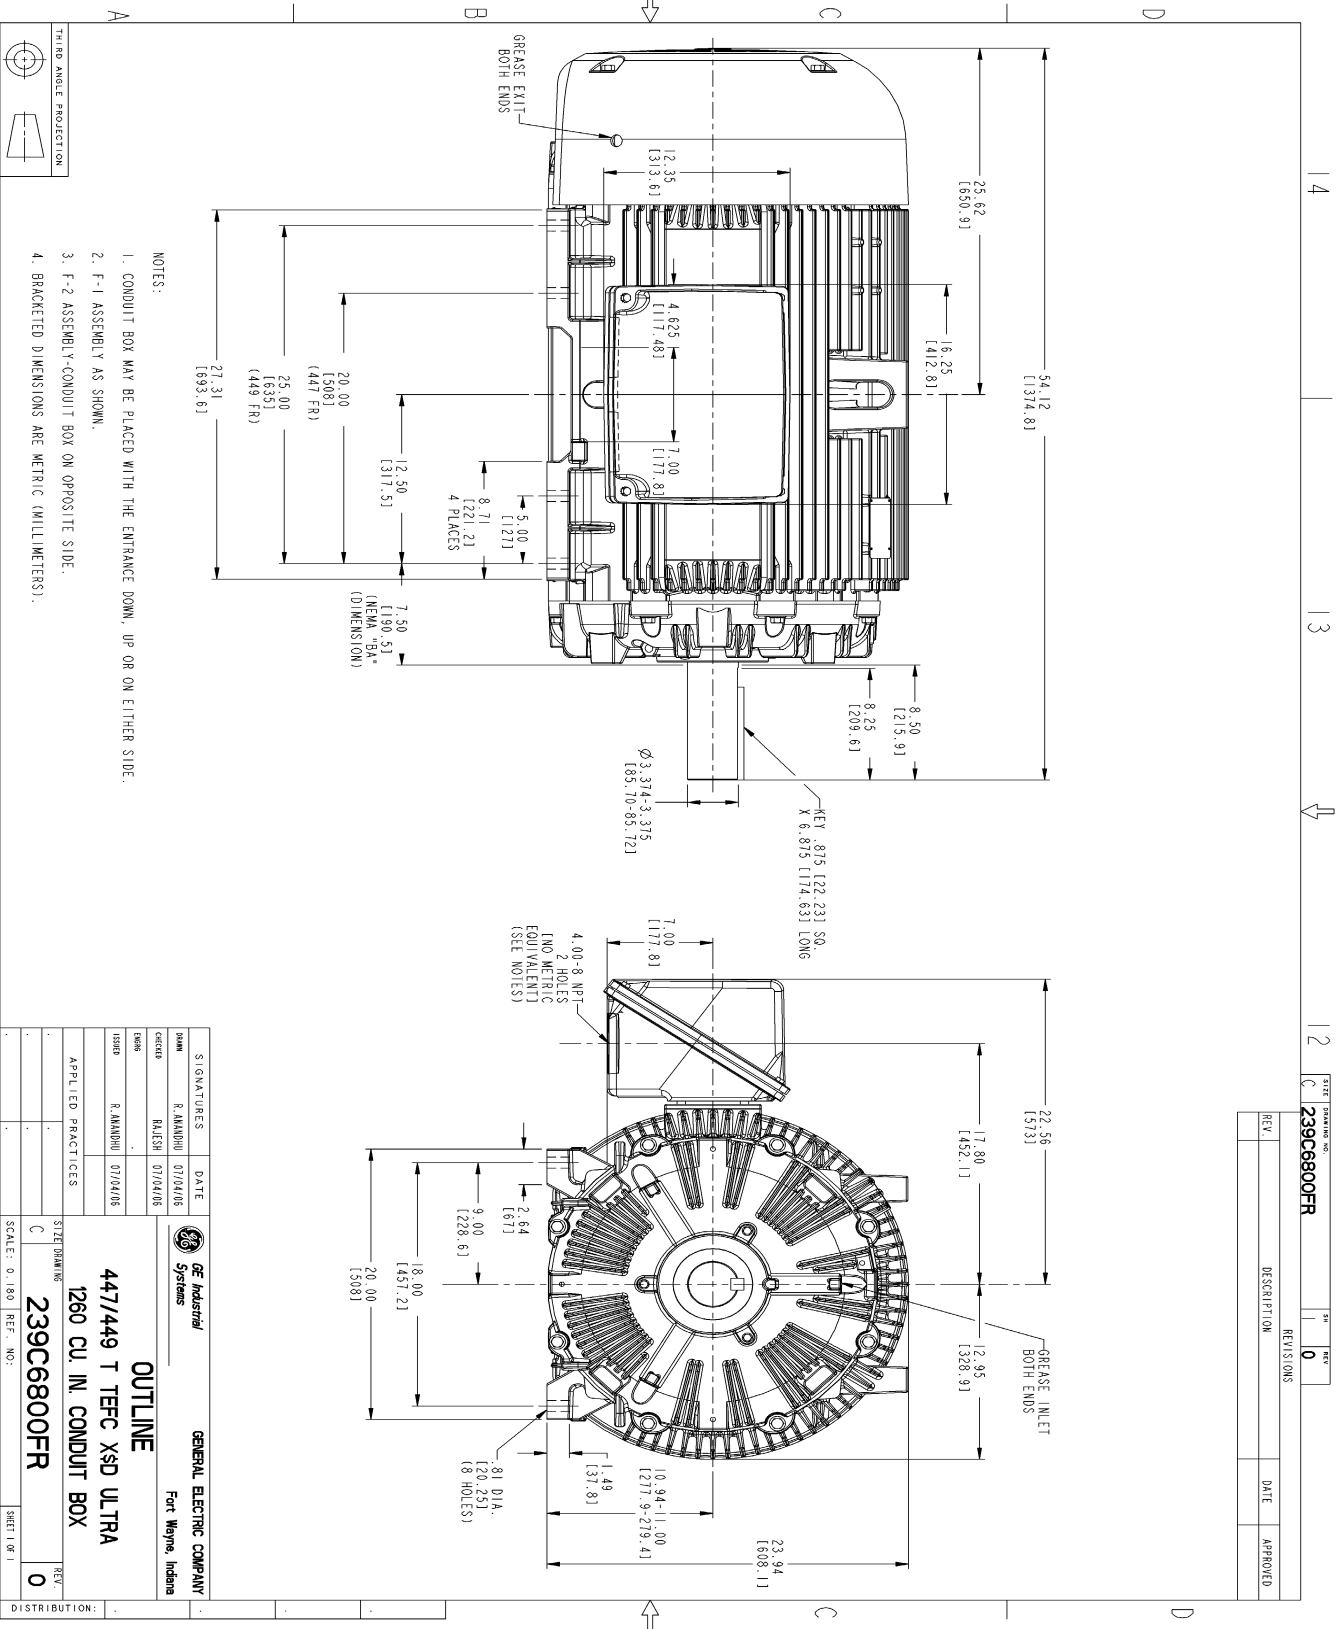

NOTES:


1. CONDUIT BOX MAY BE PLACED WITH THE ENTRANCE DOWN, UP OR ON EITHER SIDE.
2. F-1 ASSEMBLY AS SHOWN.
3. F-2 ASSEMBLY-CONDUIT BOX ON OPPOSITE SIDE.
4. BRACKETED DIMENSIONS ARE METRIC (MILLIMETERS).

REV.	DESCRIPTION	DATE	APPROVED
0			

SIGNATURES	DATE	GENERAL ELECTRIC COMPANY
DESIGNER: R. MANOHU	07/24/05	Fort Wayne, Indiana
CHECKED: R. MANOHU	07/24/05	
DATE: 07/24/05		
APPLIED PRACTICES:		
SCALE: 0.180	REF. NO.:	
<p>OUTLINE 447/449 T TEFC XSD ULTRA 1260 CU. IN. CONDUIT BOX 239C6800FR</p>		
<p>DISTRIBUTION: SHEET 1 OF 1</p>		

Marks:

Connection Diagram
GEM2034E-FIG20

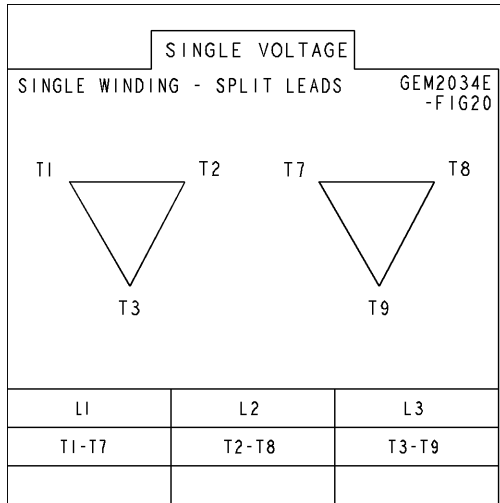

End shield Assembly		
Part Description	DE Side Part#	ODE Side Part#
End Shield	115E4355AA1	115E4355LM1
Bearing	235A2514AG01	235A2514AG01
Slinger/Inproseal	149C4399G07	149C4399G07

Fan & Fan Cover Assembly	
Part Description	Part#
Fan	159C7100G03
Fan Cover	128D6841AA1

Conduit & Accessories Box Assembly	
Part Description	Part#
Conduit Box	179B9058G03

Mechanical Accessories	
Part Description	Part#
Brake	
Tachometer	