


# TOSHIBA INTERNATIONAL CORPORATION

## Speed Torque/Current Curve

<b>Model #:</b>	0206XSSB44A-P			<b>FLAmps:</b>	25
<b>Enclosure:</b>	TEFC	<b>Voltage:</b>	460 V	<b>Frame:</b>	286TC
<b>Pole:</b>	6	<b>Frequency:</b>	3 PH / 60 Hz	<b>Ins. Class:</b>	F
<b>HP:</b>	20	<b>Rotor Inertia:</b>	6.1 lb-ft <sup>2</sup>	<b>Date:</b>	27-Jan-2012
<b>FLRPM:</b>	1170	<b>Load Inertia:</b>	N/A	<b>File:</b>	KH6020

<b>Locked Rotor Amps:</b>	145	<b>Load Type:</b>	N/A
<b>Locked Rotor Torque:</b>	255%	<b>Starting at:</b>	N/A
<b>Breakdown Torque:</b>	275%	<b>Accel. Time:</b>	N/A
<b>Rated Torque:</b>	89.8 lb-ft		

### Design Values

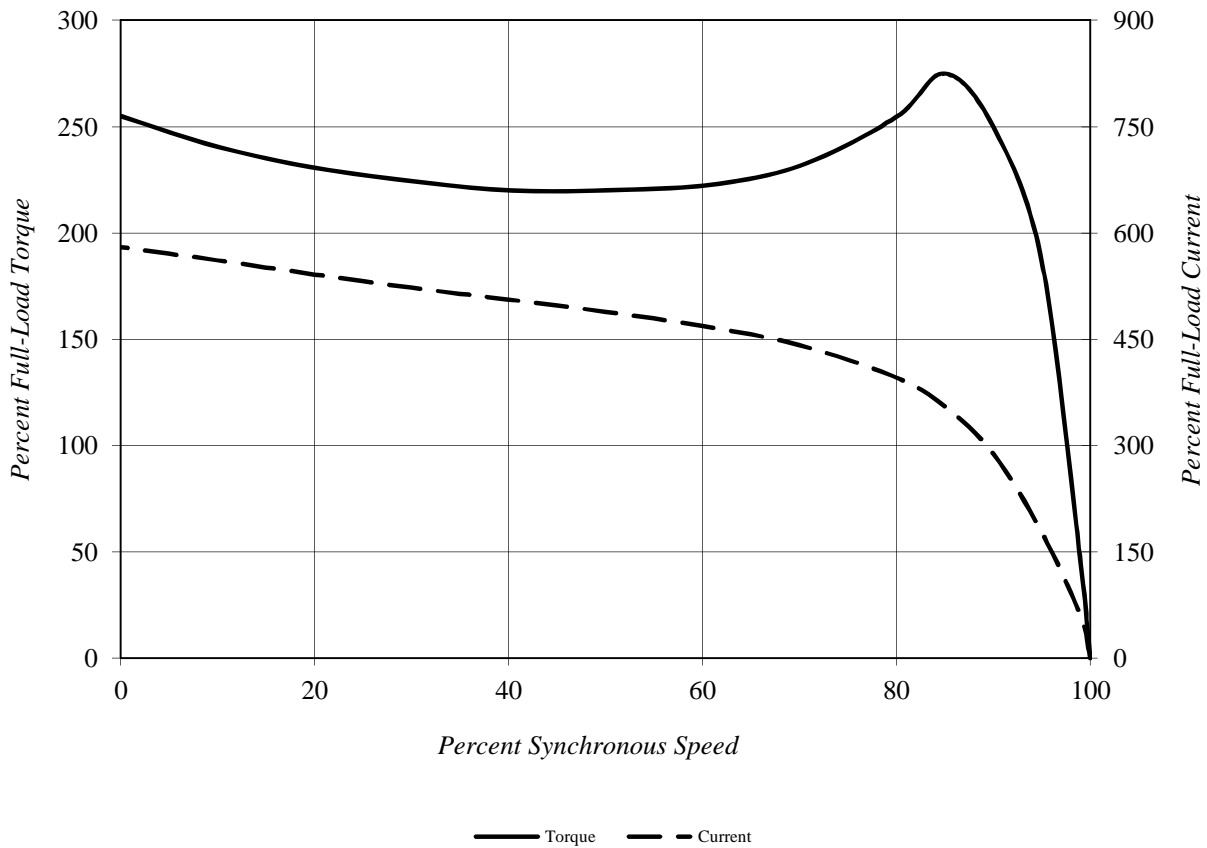

Comments: \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_

D.E. Curve #: \_\_\_\_\_

Prepared by: Van Truong

Checked by: