


DASH NO.	"C"	"AD"
800	16.51	4.74
850	17.01	5.24
900	17.51	5.74

MAXIMUM FACE RUNOUT TO BE .004 T.I.R.
 MAXIMUM PILOT ECCENTRICITY .004 T.I.R.
 PERMISSIBLE SHAFT RUNOUT .002 T.I.R.

ALL-STAINLESS
 VITON CONDUIT BOX & COVER GASKETS
 VITON O-RINGS IN ENDBELL RABBETS, UNDER THRU BOLT HEADS & BRAKE LEAD HOLE
 VITON SHAFT SEAL
 BREATHER PLUG IN CONDUIT BOX
 ALL STAINLESS STEEL CONSTRUCTION

ORACLE REV	02
------------	----

NO.	REVISION	BY & DATE	CHK	ANG	TOLERANCES UNLESS SPECIFIED		TITLE	DRAWN	RDW
					DEC.	INCHES			
D	REVISED BASE PER ECO-0090057	ARV 2/4/16	SK	.XXXX	±.0005	MAT'L.	STAINLESS STEEL DUCK - BRAKE MOTOR	RDW	4/22/04
						FINISH		CHK	
								APPD	SW 4/22/04
								SCALE	1=2
								REF	PR010432
								FMF	116483
								PREV	
						RFP	4/22/04	CAD FILE	028582
						DIST		SIZE	DRAWING NO.
								B	028582
									REV.
									D

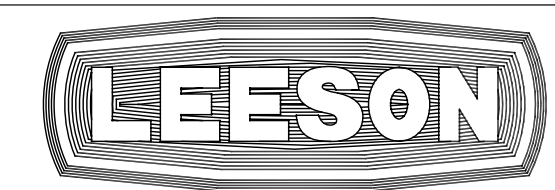

ELECTRIC MOTORS
 GEARMOTORS
 AND DRIVES