TYPE	OUTPUT		POLE	TIME RATING	VOLTAGE V	Hz	SYN.SPEED R.P.M
	HP.	kW.					
AEHE	800	597	6	CONT.	460	60	1200

TOTALLY ENCLOSED FAN-COOLED TYPE, SQUIRREL-CAGE ROTOR

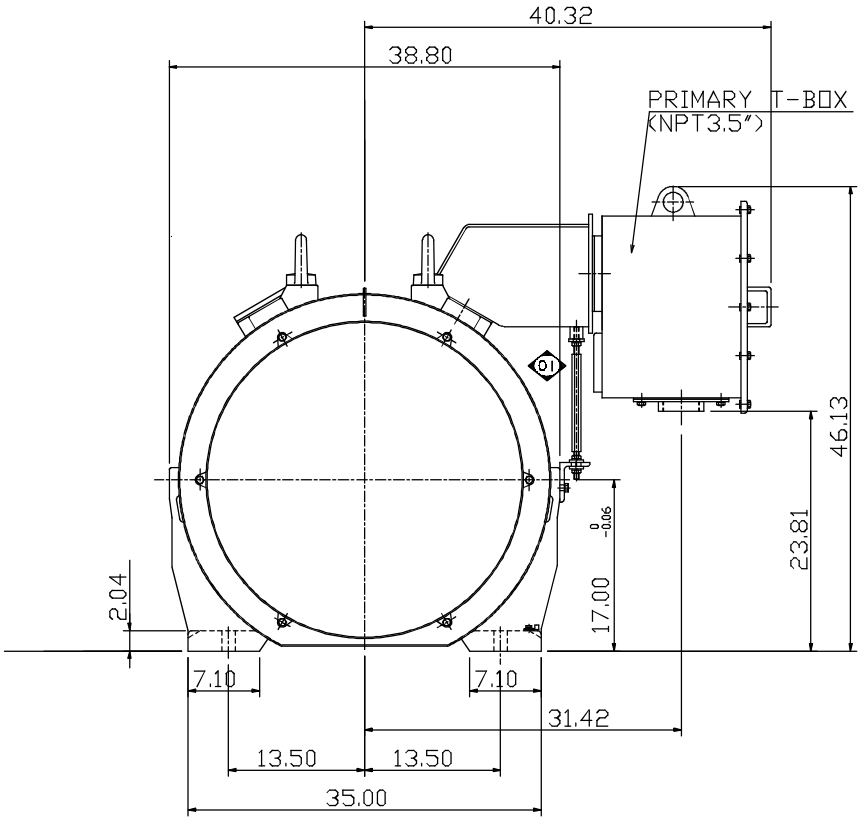

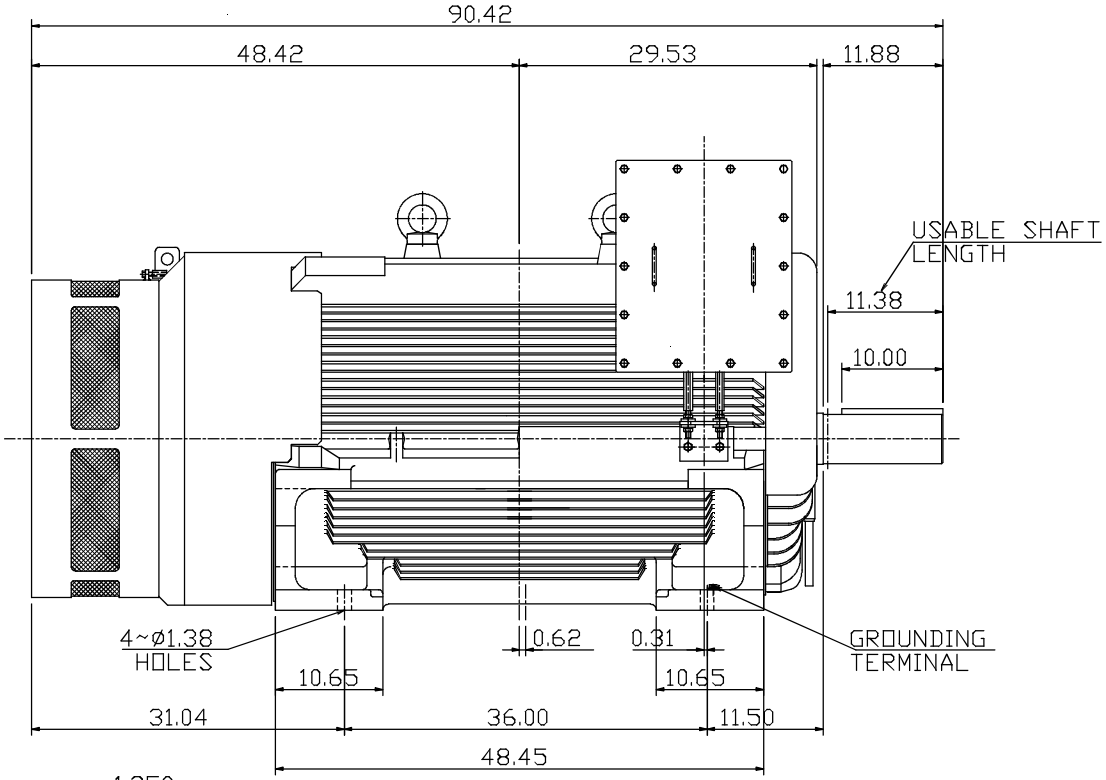



SHAFT END
(ENLARGED VIEW)

NOTE:
1. DIMENSIONS IN INCH
2. FRAME NO. 6808B
3. F CLASS INSULATION, S.F.1.15
4. FOR DIRECT FLEXIBLE COUPLING
5. ENCLOSURE: IP55
6. BEARING SIZE: DRIVE-END 6326
   OPP. DRIVE-END 6322
7. MOTOR APPROX. WEIGHT: 8000 LBS

DWN.	Y.DU	AUG·29·2011
CHKD.	H.HUANG	AUG·29·2011
APPD.	B.LIN	AUG·29·2011

DATE

CATALOG # E8006

OUTLINE DIMENSIONS
3-PHASE INDUCTION MOTOR

TECO Westinghouse

DWG NO. 4A040G955 REV: 01