TYPE	OUTPUT		POLE	TIME RATING	VOLTAGE V	Hz	SYN.SPEED R.P.M
	HP.	kW.					
AEHGTK	600	448	2	CONT.	2300/4160	60	3600

TOTALLY ENCLOSED FAN-COOLED TYPE, SQUIRREL-CAGE ROTOR

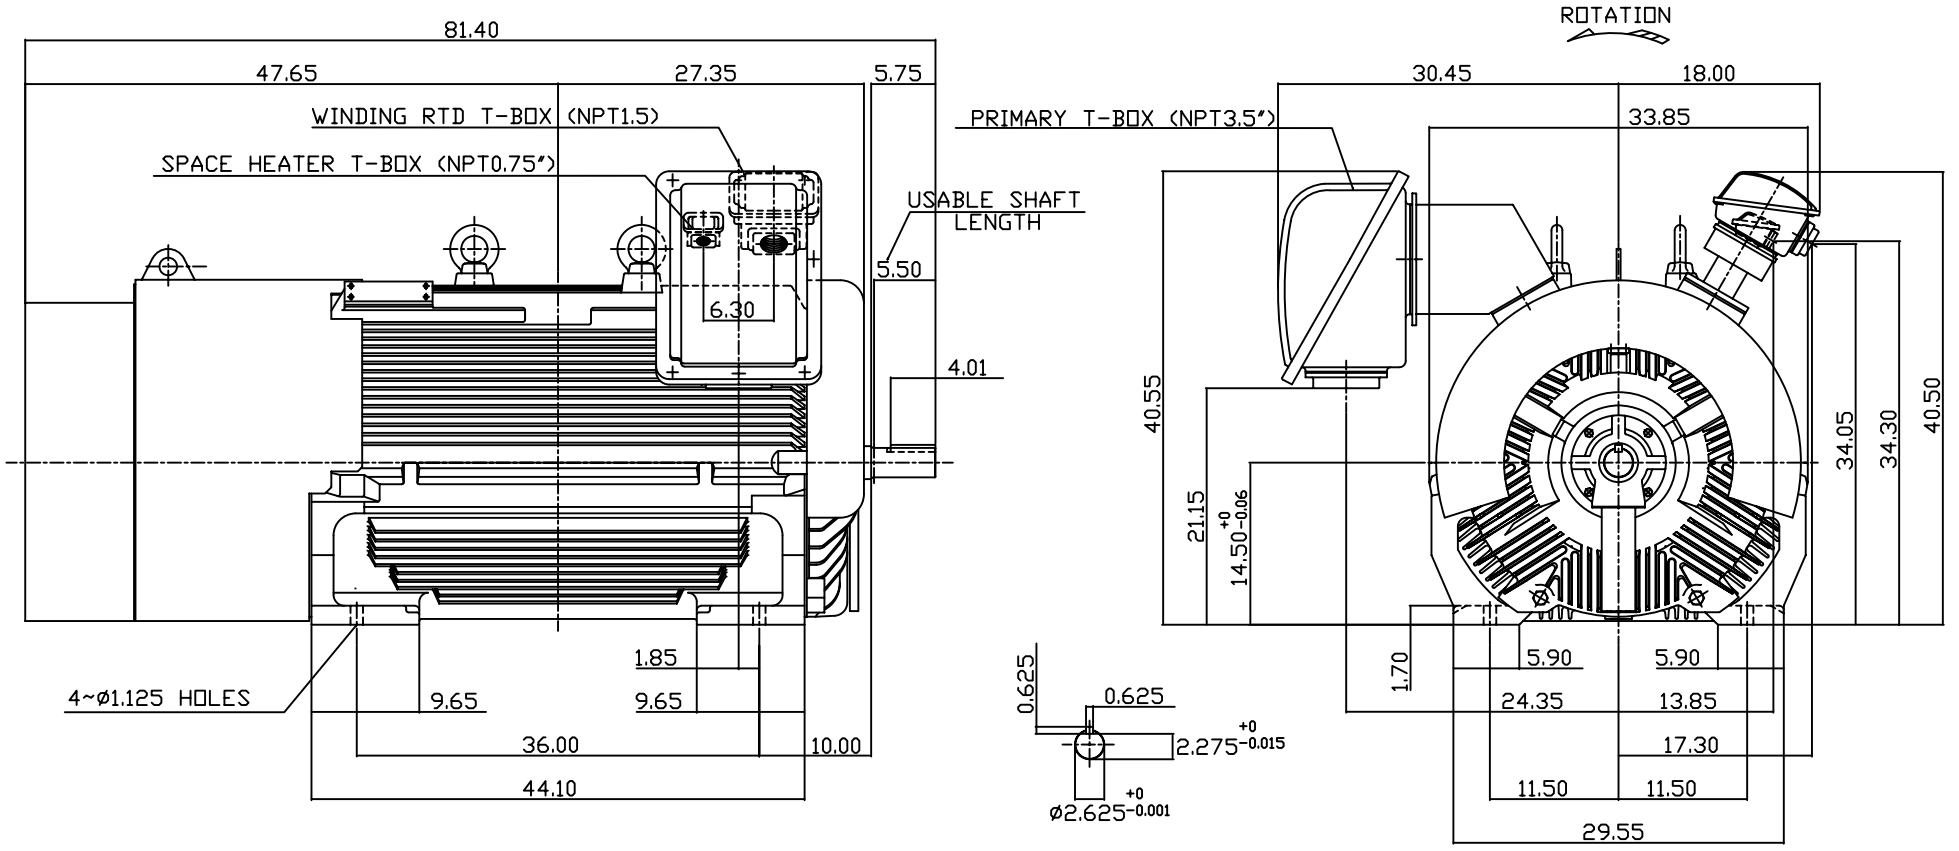

NOTE:

1. DIMENSIONS IN INCH.
2. FRAME NO. 5810A
3. F CLASS INSULATION, S.F.1.15
4. FOR DIRECT FLEXIBLE COUPLING
5. WITH SPACE HEATER 120 VOLT SINGLE PHASE 300 WATTS
6. 100 OHM PLATINUM WINDING RTD'S 2/PHASE
7. BEARING SIZE: DRIVE END: 6315C3
   NON-DRIVE END: 6315M/C3 VL024
8. MOTOR APPROX. WEIGHT: 5950 LBS

TW-66C

DWN.	W.L.LIN	APR·17·2003
CHKD.	W.L.LIN	APR·17·2003
APPD.	C.WANG	APR·17·2003

DATE MAY 6, 2004

CATALOG NO. KG6002

OUTLINE DIMENSIONS

3-PHASE INDUCTION MOTOR

TECO Westinghouse

DWG NO. 3A040T4590

REV: 00