
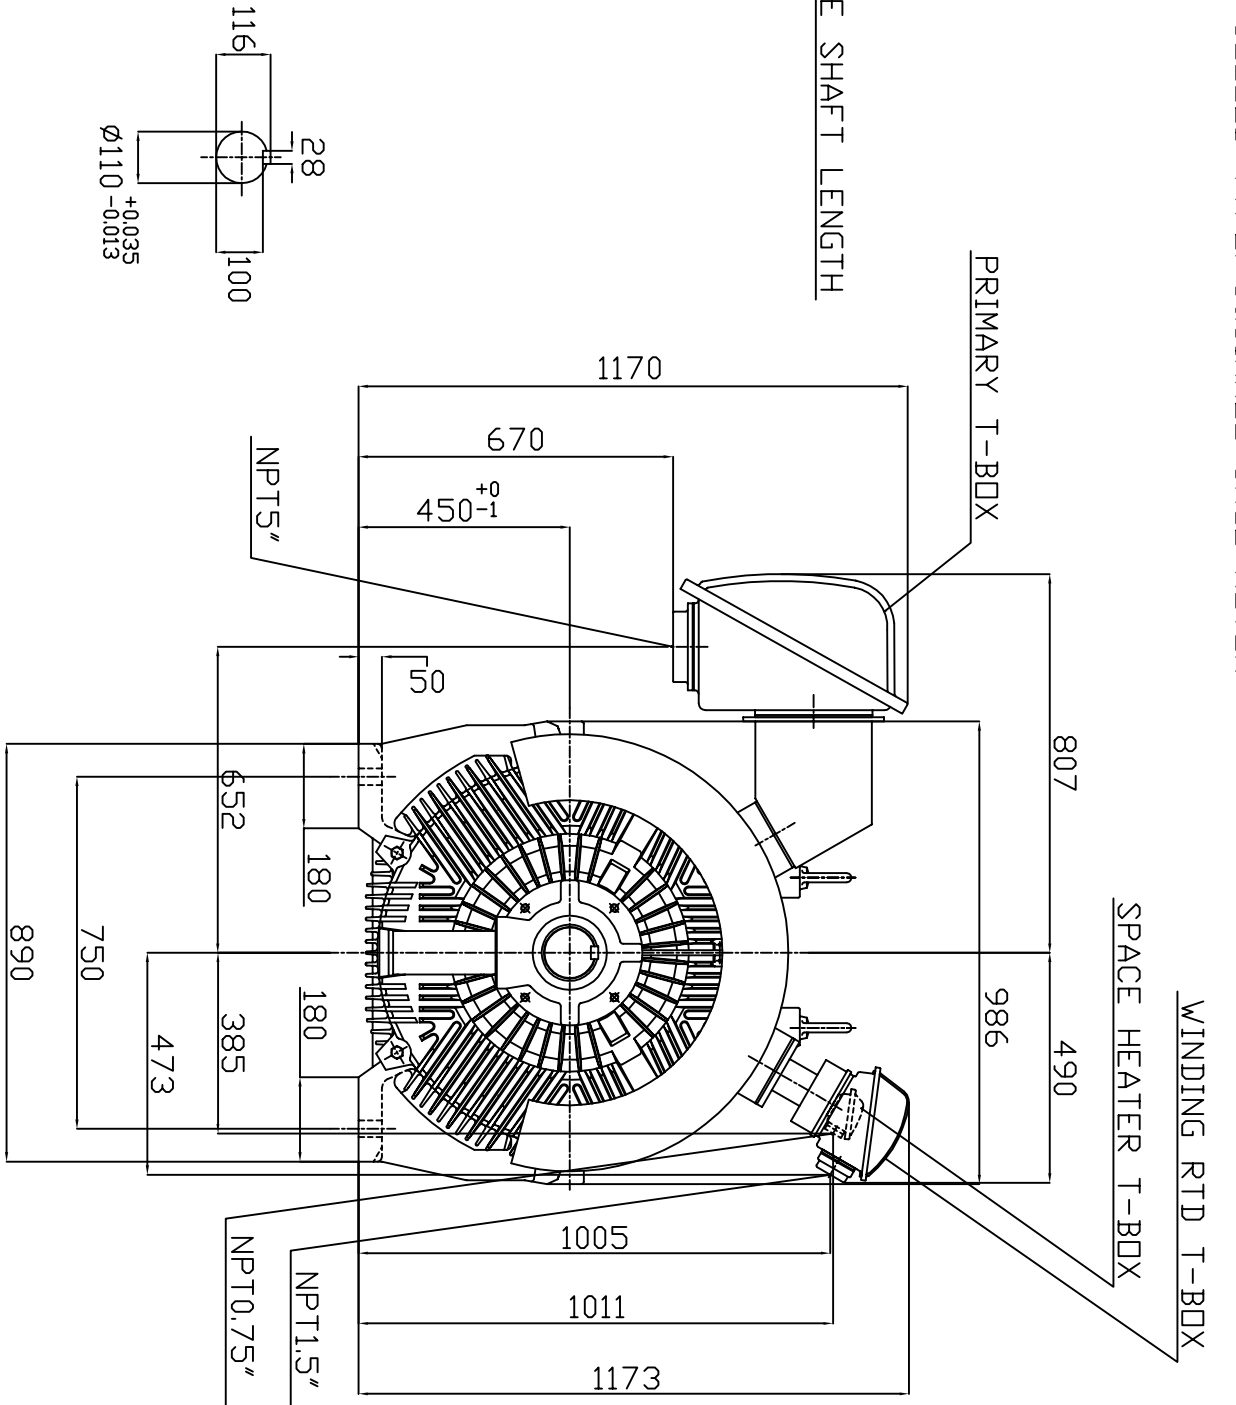


TYPE	OUTPUT		POLE	TIME RATING	VOLTAGE V	HZ	SYN.SPEED R.P.M
	HP	KW					
AEJHTK	800	597	8	CDNT.	2300/4160	60	900

TOTALLY ENCLOSED FAN COOLED TYPE. SQUIRREL CAGE ROTOR

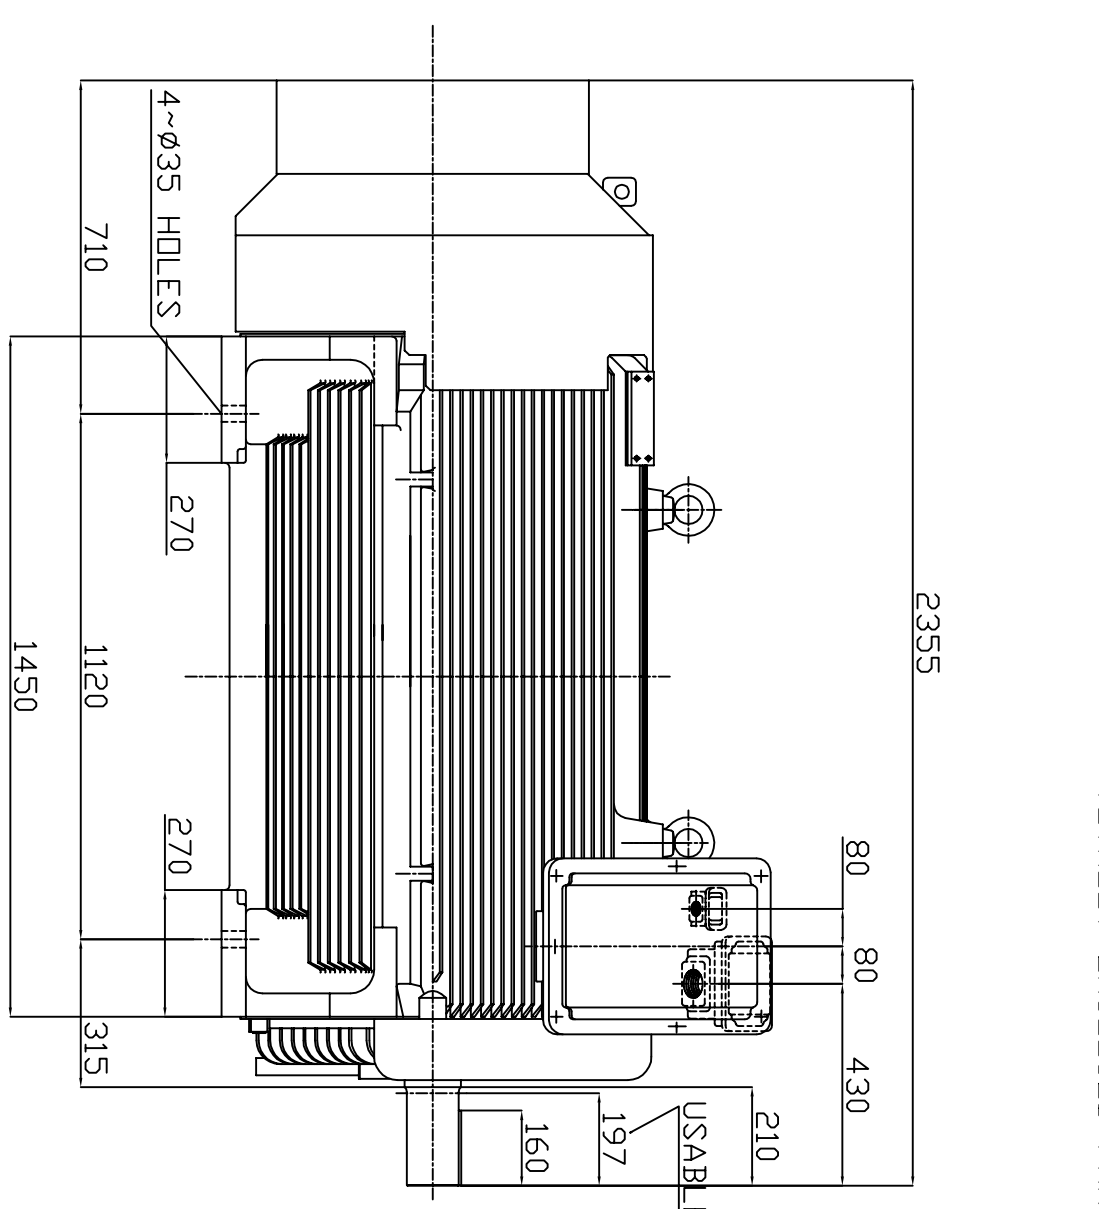

NOTE:

1. DIMENSIONS IN MM
2. FRAME NO. 450C
3. F CLASS INSULATION
4. FOR DIRECT FLEXIBLE COUPLING
5. WITH SPACE HEATER 120 VOLT SINGLE PHASE 300 WATTS
6. WITH 100 OHM PLATINUM WINDING RTD'S 2/PHASE
7. BEARING SIZE: DRIVE END: 6324
NON-DRIVE END: 6322
8. MOTOR APPROX. WEIGHT: 4400 KGS

DWN.	W.L.LIN	APR. 22. 2003
CHKD.	W.L.LIN	APR. 22. 2003
APPD.	C.WANG	APR. 22. 2003

DATE	MAY 7, 2004	OUTLINE DIMENSIONS
CATALOG NO.	JH08008	3-PHASE INDUCTION MOTOR
		DWG NO. REV: 00
		3A040T4070

TW-66C