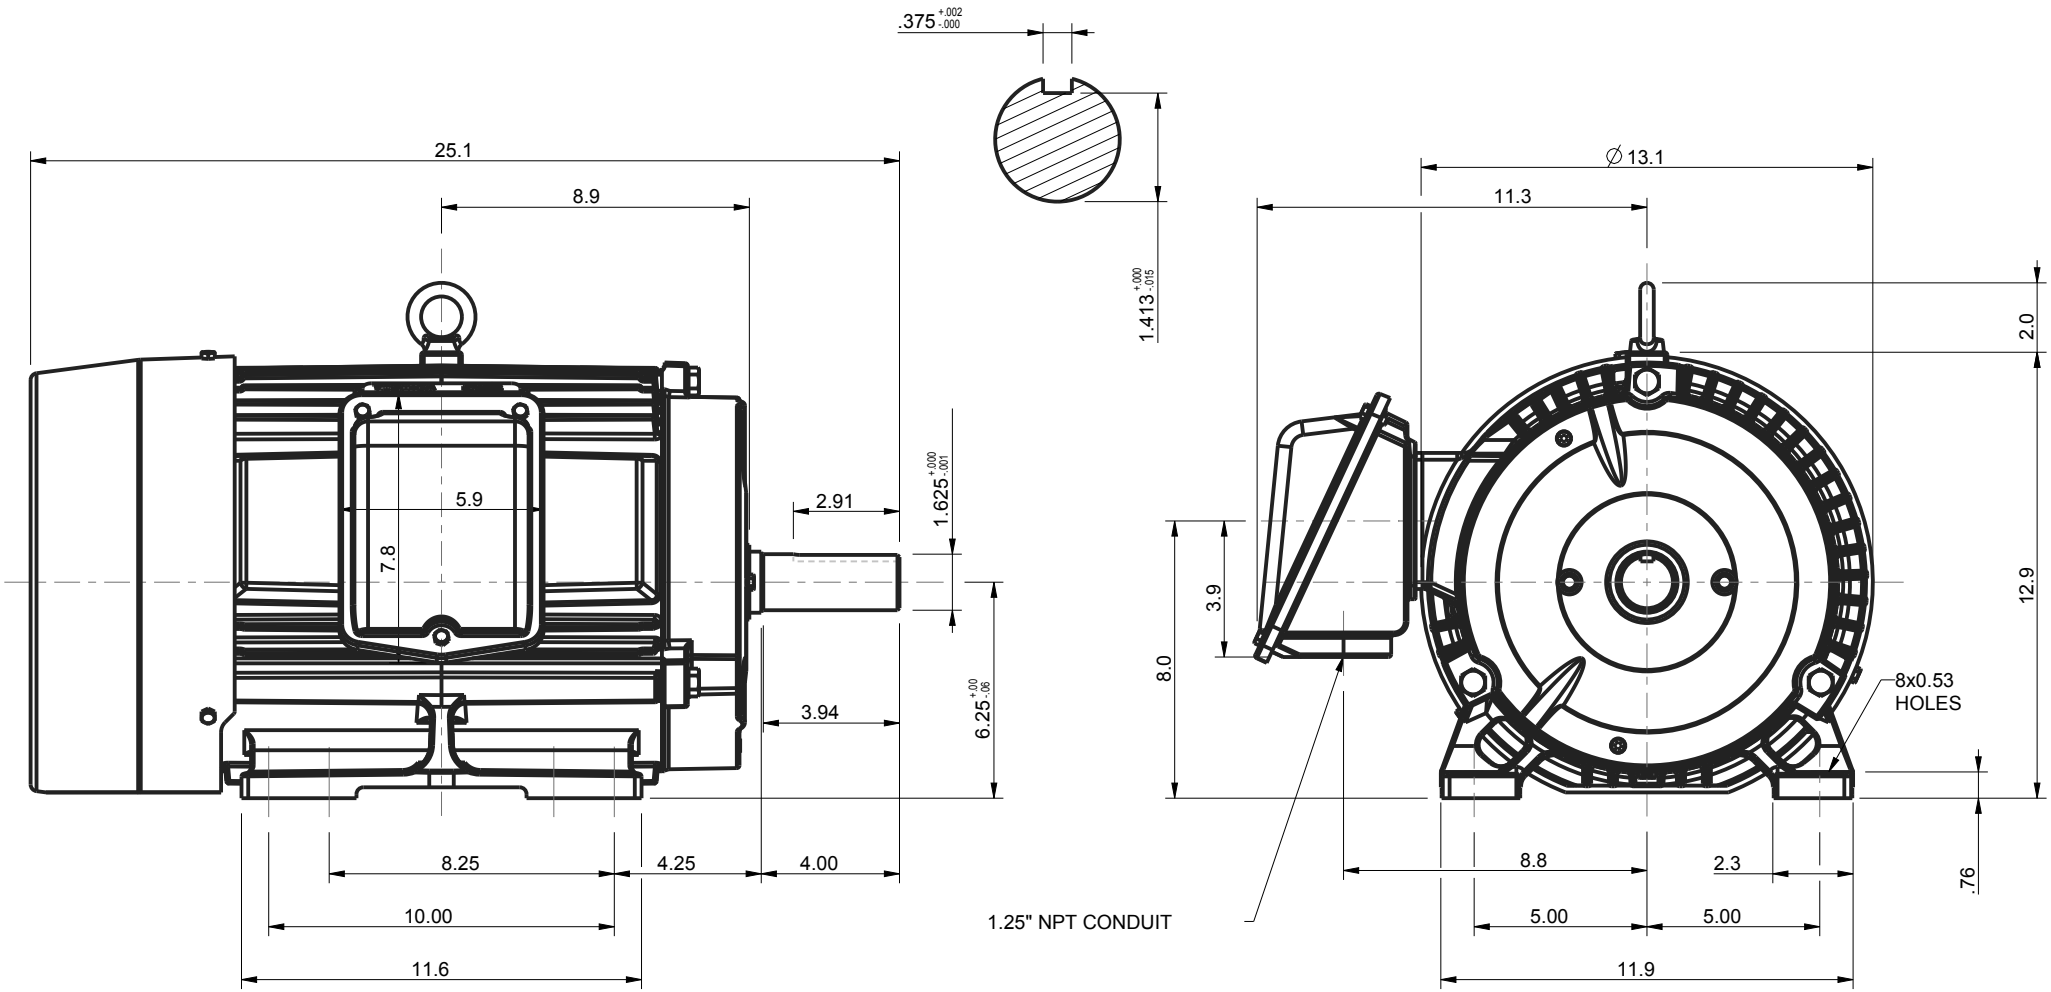


| UNITS: INCHES | NOTES: |
|---|---|
| ROTATION FROM NDE | 1. MAIN CONDUIT BOX MAY BE ROTATED IN 90° INCREMENTS |
| X CCW  CW | 2. STANDARD PRODUCT USES BI-DIRECTIONAL FAN. OPPOSITE ROTATION AVAILABLE ONLY BY CONNECTION CHANGE. |
| | 3. KEY DIMENSIONS EQUAL 0.375"x 0.375"x 2.88" (MOTOR SUPPLIED WITH KEY) |

TOSHIBA RESERVES THE RIGHT TO MAKE CHANGES OF TECHNICAL IMPROVEMENT AND THE DATA MAY CHANGE WITHOUT NOTICE — [ ] PRELIMINARY

DO NOT USE FOR CONSTRUCTION, INSTALLATION, OR APPLICATION PURPOSES UNLESS THE DRAWING IS MARKED AS CERTIFIED — [X] CERTIFIED

TOSHIBA
www.toshiba.com/tic
TOSHIBA INTERNATIONAL CORPORATION

MILL & CHEMICAL DUTY EQP 841 840

TOTALLY ENCLOSED FAN COOLED
HORIZONTAL FOOT MOUNTED
3 PHASE INDUCTION MOTOR
254T-256T F1 ASSEMBLY

DRAWING #: MDSLV041-04
REV. DATE: 06/29/18 REV. #: 2 PER.: M. O'DOWD
REV. DESCRIP.: