


Electra.Cat	FRAME	HP	Volt	RPM	HZ	PH	Encl.	S.F	Duty	thermal protector	L
6439191263	56C	1.5	115/230	1725	60	1	TENV	1.15	15Min.	N/A	12.6
6439191264	56C	2	115/230	1725	60	1	TENV	1.15		N/A	13.4

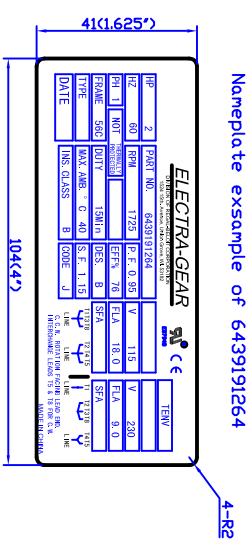

- Note:
1. The capacitor leads to be connected using flag terminals.
  2. All the hardwares are using SST..
  3. Drain holes at 6:00.
  4. C flange mounting holes have plugs.

TOLERANCES UNLESS OTHERWISE SPECIFIED		DRAWN		TITLE	
		APPR.		6439191263, 6439191264 outline drawing	
		R.F.P.		CUSTOMER	
		SCALE		DATE 2009.9.29	
		REF.		REV.	
		F/W		DRAWING NO. 169993.00	
REVISION		BY & DATE		CHK'D.	
ND.					

THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED THIS IS AN ELECTRONICALLY GENERATED DOCUMENT - DO NOT SCALE THIS PRINT