

PE143JP-1.5-2


CLOSE COUPLED PUMP MOTORS

NEMA PREMIUM EFFICIENCY

THREE PHASE, TOTALLY ENCLOSED FAN COOLED, JP FRAME

INVERTER DUTY 10:1 CT; 20:1 VT - NEMA MG1 PART 31

Factory Certified for T2B Class I, Division II, Groups A,B,C & D and Class II, Division II, Groups F & G

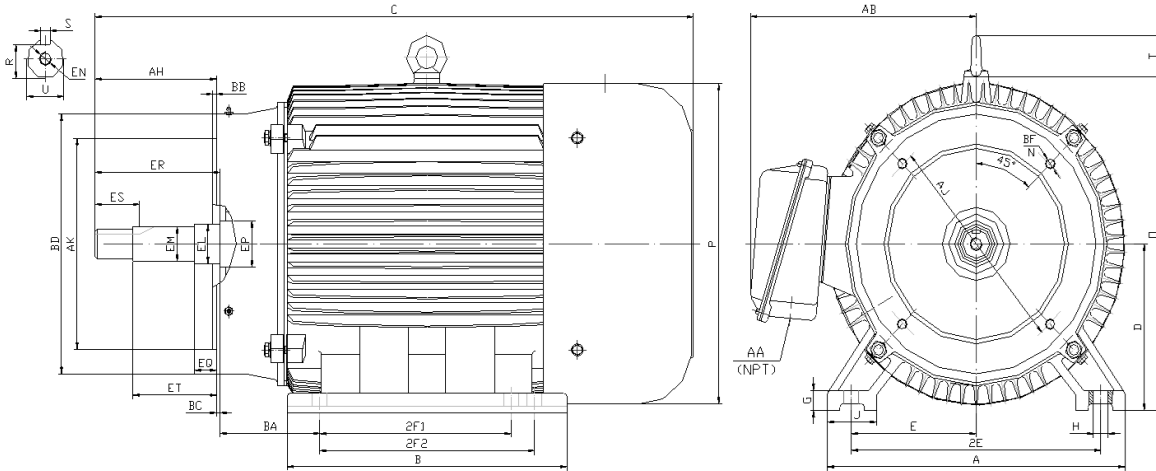

DIMENSIONS

HP	RPM	Frame	MOUNTING														
			A	B	C	D	G	H	J	E	2E	2F1	2F2	O	P	T	BA
1.5	3600	143JP	7.00	5.20	19.30	3.50	0.50	0.34	1.40	2.75	5.50	4.00	5.00	7.10	6.95	0.00	2.75

FLANGE								Shaft Extension, Key Set									
AK	AJ	AH	BB	BC	BD	N*BF	U	R	S	EQ	ER	ES	ET	EP	EL	EM	EN
4.500	5.88	7.343	0.156	0.12	6.62	4*3/8-16	0.8745	0.771	0.190	1.578	7.31	1.65	5.952	1.18	1.156	1.0000	3/8-16
4.497		7.281	0.125				0.8740	0.756	0.188	1.548			5.922		1.154	0.9995	

Conduit Box		Bearings		Mount
AA	AB	DE	ODE	
0.75	6.10	6206-ZZ	6205-ZZ	

BEARING LUBRICATION: The bearings come lubricated with Mobil Polyrex EM Polyurea Grease.





PE143JP-1.5-2

CLOSE COUPLED PUMP MOTORS

NEMA PREMIUM EFFICIENCY

THREE PHASE, TOTALLY ENCLOSED FAN COOLED, JP FRAME

INVERTER DUTY 10:1 CT; 20:1 VT - NEMA MG1 PART 31








Factory Certified for T2B Class I, Division II, Groups A,B,C & D and Class II, Division II, Groups F & G

PERFORMANCE DATA

HP	RPM	Frame	Voltage	Frequency (Hz)	Full Load S.F.	Insulation Class	NEMA Design	Slip (%)	NEMA Code	Enclosure Type	IP Rating	Max. Ambient
1.5	3520	143JP	208-230/460	60	1.15	F	B	2.2	M	TEFC	55	40° C

Amps (460V)		Efficiency (%)				Power Factor			Torque (ft-lb)			DE Bearing	ODE Bearing	Connection	Weight (lbs.)
FLA	LRA	100%	75%	50%	Min.	100%	75%	50%	FLT	LRT %	BDT %				
2.0	20.0	84.0	82.0	77.0	81.5	0.740	0.660	0.540	2.2	200	280	6206-ZZ	6205-ZZ	9 Lead 2Y/Y	47

NAME PLATE

 North American Electric, Inc.															CONNECTION DIAGRAMS 208-230V 		
INVERTER DUTY 20:1 VT; 10:1 CT										CLOSE COUPLED PUMP MOTOR							
CAT NO:		PE143JP-1.5-2				FRAME		143JP		PHASE		3					
HZ	60	S.F.	1.15	HZ	50	S.F.	1.0	ENCL	TEFC	IP	55						
HP	1.5	RPM	3520	HP	1.5	RPM	2900	DUTY	CONT	DES	B						
VOLTS	208-230/460			VOLTS	190/380			AMB	40° C		INS	F					
FLA	4.4 - 4 / 2			FLA	5.2/2.6			DE BEARING		6206-ZZ							
CODE	M	P.F.	0.74	CODE	K	P.F.	0.80	ODE BEARING		6205-ZZ							
EFF	84.0	MIN	81.5	EFF	82	MIN	79.5	LUB:		Mobil Polyrex EM							
MOTOR WEIGHT		47 LBS		CONNECTION		9 Lead 2Y/Y		SER NO									
Specifically designed for use on industrial and commercial pumping units. Hernando, Mississippi										   CC 082A					460V 		

APPLICATIONS:

Specifically designed for use on industrial and commercial pumping units.