

**PE145JP-1.5-4**

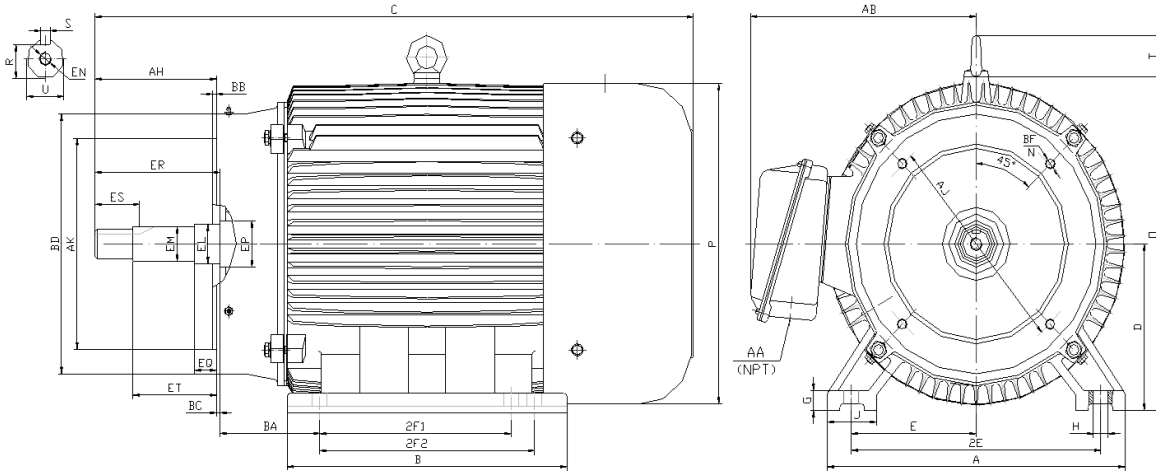
**CLOSE COUPLED PUMP MOTORS**

**NEMA PREMIUM EFFICIENCY**

**THREE PHASE, TOTALLY ENCLOSED FAN COOLED, JP FRAME**

**INVERTER DUTY 10:1 CT; 20:1 VT - NEMA MG1 PART 31**

Factory Certified for T2B Class I, Division II, Groups A,B,C & D and Class II, Division II, Groups F & G



**DIMENSIONS**

HP	RPM	Frame	MOUNTING														
			A	B	C	D	G	H	J	E	2E	2F1	2F2	O	P	T	BA
1.5	1800	145JP	7.00	6.20	20.30	3.50	0.50	0.34	1.40	2.75	5.50	4.00	5.00	7.10	6.95	0.00	2.75

FLANGE							Shaft Extension, Key Set										
AK	AJ	AH	BB	BC	BD	N*BF	U	R	S	EQ	ER	ES	ET	EP	EL	EM	EN
4.500	5.88	7.343	0.156	0.12	6.62	4*3/8-16	0.8745	0.771	0.190	1.578	7.31	1.65	5.952	1.18	1.156	1.0000	3/8-16
4.497		7.281	0.125				0.8740	0.756	0.188	1.548			5.922		1.154	0.9995	

Conduit Box		Bearings		Mount
AA	AB	DE	ODE	
0.75	6.10	6206-ZZ	6205-ZZ	F1

**BEARING LUBRICATION:** The bearings come lubricated with Mobil Polyrex EM Polyurea Grease.





## PE145JP-1.5-4

**CLOSE COUPLED PUMP MOTORS**

**NEMA PREMIUM EFFICIENCY**

**THREE PHASE, TOTALLY ENCLOSED FAN COOLED, JP FRAME**

**INVERTER DUTY 10:1 CT; 20:1 VT - NEMA MG1 PART 31**








Factory Certified for T2B Class I, Division II, Groups A,B,C & D and Class II, Division II, Groups F & G

### PERFORMANCE DATA

HP	RPM	Frame	Voltage	Frequency (Hz)	Full Load S.F.	Insulation Class	NEMA Design	Slip (%)	NEMA Code	Enclosure Type	IP Rating	Max. Ambient
1.5	1750	145JP	208-230/460	60	1.15	F	B	2.8	M	TEFC	55	40° C

Amps (460V)		Efficiency (%)				Power Factor			Torque (ft-lb)			DE Bearing	ODE Bearing	Connection	Weight (lbs.)
FLA	LRA	100%	75%	50%	Min.	100%	75%	50%	FLT	LRT %	BDT %				
2.2	20.0	86.5	86.0	83.5	84.0	0.700	0.620	0.480	4.5	250	330	6206-ZZ	6205-ZZ	9 Lead 2Y/Y	53

### NAME PLATE

 <b>North American Electric, Inc.</b>													<b>CONNECTION DIAGRAMS</b>  <b>208-230V</b> 												
<b>INVERTER DUTY 20:1 VT; 10:1 CT</b>										<b>CLOSE COUPLED PUMP MOTOR</b>															
CAT NO:		PE145JP-1.5-4				FRAME		145JP		PHASE		3		<b>460V</b> 											
HZ		60		S.F.		1.15		HZ		50		S.F.					1.0		ENCL		TEFC		IP		55
HP		1.5		RPM		1750		HP		1.5		RPM		1430		DUTY		CONT		DES		B			
VOLTS		208-230/460				VOLTS		190/380		AMB		40° C		INS		F									
FLA		4.7 - 4.4 / 2.2				FLA		5.4/2.7		DE BEARING		6206-ZZ													
CODE		M		P.F.		0.70		CODE		H		P.F.		0.75		ODE BEARING		6205-ZZ							
EFF		86.5		MIN		84.0		EFF		84		MIN		81.5		LUB:		Mobil Polyrex EM							
MOTOR WEIGHT		53		LBS		CONNECTION		9 Lead 2Y/Y		SER NO															
Specifically designed for use on industrial and commercial pumping units.  Hernando, Mississippi																CC 082A									

### APPLICATIONS:

Specifically designed for use on industrial and commercial pumping units.