

PE184JP-7.5-2

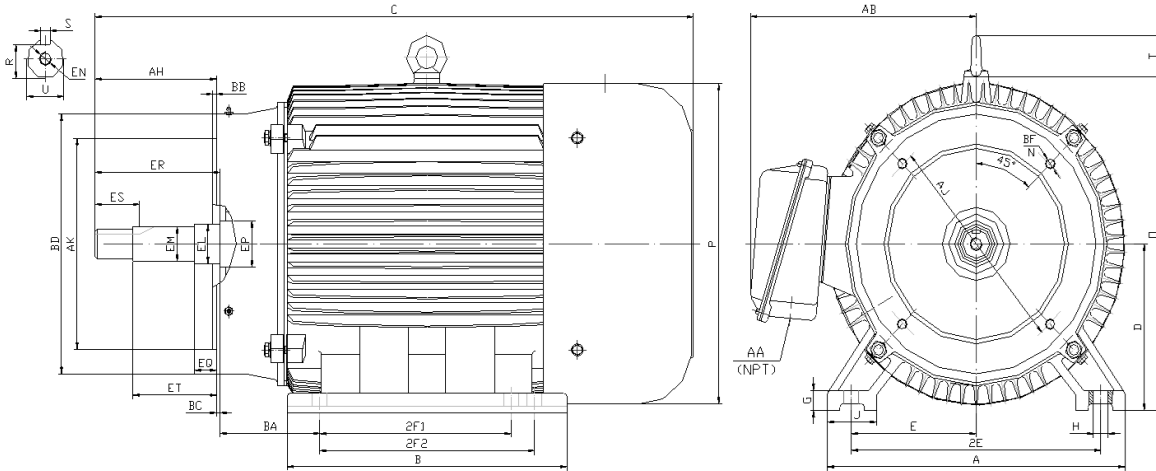
CLOSE COUPLED PUMP MOTORS

NEMA PREMIUM EFFICIENCY

THREE PHASE, TOTALLY ENCLOSED FAN COOLED, JP FRAME

INVERTER DUTY 10:1 CT; 20:1 VT - NEMA MG1 PART 31

Factory Certified for T2B Class I, Division II, Groups A,B,C & D and Class II, Division II, Groups F & G



DIMENSIONS

HP	RPM	Frame	MOUNTING														
			A	B	C	D	G	H	J	E	2E	2F1	2F2	O	P	T	BA
7.5	3600	184JP	9.50	8.30	22.55	4.50	0.60	0.41	2.00	3.75	7.50	4.50	5.50	9.10	8.70	1.60	3.50

FLANGE								Shaft Extension, Key Set									
AK	AJ	AH	BB	BC	BD	N*BF	U	R	S	EQ	ER	ES	ET	EP	EL	EM	EN
4.500	5.88	7.343	0.156	0.12	6.62	4*3/8-16	0.8745	0.771	0.190	1.578	7.31	1.65	5.952	1.57	1.250	1.0000	3/8-16
4.497		7.281	0.125				0.8740	0.756	0.188	1.548			5.922		1.248	0.9995	

Conduit Box		Bearings		Mount
AA	AB	DE	ODE	
0.75	7.50	6208-ZZ	6306-ZZ	F1

BEARING LUBRICATION: The bearings come lubricated with Mobil Polyrex EM Polyurea Grease.





PE184JP-7.5-2

CLOSE COUPLED PUMP MOTORS

NEMA PREMIUM EFFICIENCY

THREE PHASE, TOTALLY ENCLOSED FAN COOLED, JP FRAME

INVERTER DUTY 10:1 CT; 20:1 VT - NEMA MG1 PART 31








Factory Certified for T2B Class I, Division II, Groups A,B,C & D and Class II, Division II, Groups F & G

PERFORMANCE DATA

HP	RPM	Frame	Voltage	Frequency (Hz)	Full Load S.F.	Insulation Class	NEMA Design	Slip (%)	NEMA Code	Enclosure Type	IP Rating	Max. Ambient
7.5	3500	184JP	208-230/460	60	1.15	F	B	2.8	H	TEFC	55	40° C

Amps (460V)		Efficiency (%)				Power Factor			Torque (ft-lb)			DE Bearing	ODE Bearing	Connection	Weight (lbs.)
FLA	LRA	100%	75%	50%	Min.	100%	75%	50%	FLT	LRT %	BDT %				
8.8	63.0	89.5	89.0	88.0	87.5	0.900	0.830	0.730	11.3	190	300	6208-ZZ	6306-ZZ	9 Lead 2Y/Y	119

NAME PLATE

 North American Electric, Inc.													CONNECTION DIAGRAMS 208-230V 		
INVERTER DUTY 20:1 VT; 10:1 CT					CLOSE COUPLED PUMP MOTOR										
CAT NO:		PE184JP-7.5-2			FRAME		184JP		PHASE		3		460V 		
HZ	60	S.F.	1.15	HZ	50	S.F.	1.0	ENCL	TEFC	IP	55				
HP	7.5	RPM	3500	HP	7.5	RPM	2880	DUTY	CONT	DES	B				
VOLTS		208-230/460			VOLTS		190/380		AMB		40° C		INS		F
FLA	18.8 - 17.6 / 8.8		FLA		22/11		DE BEARING		6208-ZZ		ODE BEARING		6306-ZZ		
CODE	H	P.F.	0.90	CODE	E	P.F.	0.92	LUB:		Mobil Polyrex EM					
EFF	89.5	MIN	87.5	EFF	87.5	MIN	85.5	MOTOR WEIGHT		119 LBS		CONNECTION		9 Lead 2Y/Y	SER NO
Specifically designed for use on industrial and commercial pumping units. Hernando, Mississippi										  		CC 082A			

APPLICATIONS:

Specifically designed for use on industrial and commercial pumping units.