

PE254TC-15-2


GENERAL PURPOSE ELECTRIC MOTOR

NEMA PREMIUM EFFICIENCY

THREE PHASE, TOTALLY ENCLOSED FAN COOLED - C-FLANGE W/ FEET

INVERTER DUTY 10:1 CT; 20:1 VT - NEMA MG1 PART 31

Factory Certified for T2B Class I, Division II, Groups A,B,C & D and Class II, Division II, Groups F & G

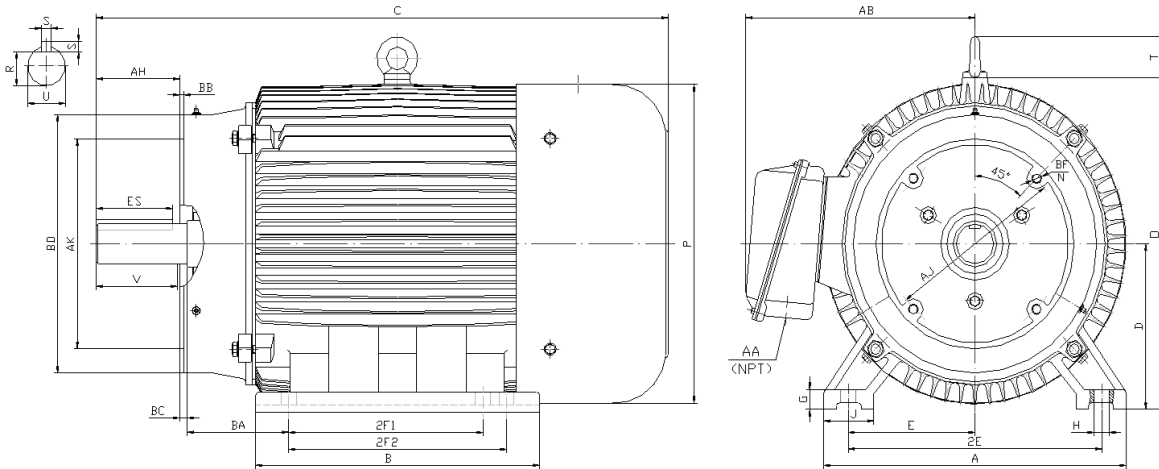

DIMENSIONS

| HP | RPM | Frame | MOUNTING | | | | | | | | | | | | | | |
|----|------|-------|----------|-------|-------|------|------|------|------|------|-------|------|------|-------|-------|------|------|
| | | | A | B | C | D | G | H | J | E | 2E | 2F1 | 2F2 | O | P | T | BA |
| 15 | 3600 | 254TC | 13.00 | 12.20 | 23.20 | 6.25 | 0.70 | 0.53 | 2.75 | 5.00 | 10.00 | 8.25 | 0.00 | 13.00 | 12.40 | 2.20 | 4.25 |

| FLANGE | | | | | | | Shaft Extension, Key Set | | | | | | Conduit Box | | Bearings | | Mount |
|--------|------|------|------|------|-------|----------|--------------------------|------|------|------|------|-----|-------------|-------|----------|------|-------|
| AH | AJ | AK | BB | BC | BD | BF | U | V | R | S | ES | N-W | AA | AB | DE | ODE | |
| 3.75 | 7.25 | 8.50 | 0.25 | 0.25 | 10.00 | 4*1/2-13 | 1.63 | 3.75 | 1.42 | 0.38 | 2.91 | NA | 1.25 | 10.10 | 6309 | 6309 | F1 |

BEARING LUBRICATION: The bearings come lubricated with Mobil Polyrex EM Polyurea Grease. It is recommended that you add some additional lubrication when the motor is installed.

Three options (brands) for suitable lubrication include, but are not limited to, the following:

- 1.) Mobil Polyrex EM
- 2.) Citco Polyurea MP
- 3.) Conoco Phillips Polytac EP



PE254TC-15-2

GENERAL PURPOSE ELECTRIC MOTOR

NEMA PREMIUM EFFICIENCY

THREE PHASE, TOTALLY ENCLOSED FAN COOLED - C-FLANGE W/ FEET

INVERTER DUTY 10:1 CT; 20:1 VT - NEMA MG1 PART 31








Factory Certified for T2B Class I, Division II, Groups A,B,C & D and Class II, Division II, Groups F & G

PERFORMANCE DATA

| HP | RPM | Frame | Voltage | Frequency (Hz) | Full Load S.F. | Insulation Class | NEMA Design | Slip (%) | NEMA Code | Enclosure Type | IP Rating | Max. Ambient |
|----|------|-------|-------------|----------------|----------------|------------------|-------------|----------|-----------|----------------|-----------|--------------|
| 15 | 3545 | 254TC | 208-230/460 | 60 | 1.15 | F | B | 1.5 | G | TEFC | 55 | 40° C |

| Amps (460V) | | Efficiency (%) | | | | Power Factor | | | Torque (ft-lb) | | | DE Bearing | ODE Bearing | Connection | Weight (lbs.) |
|-------------|-------|----------------|------|------|------|--------------|-------|-------|----------------|-------|-------|------------|-------------|--------------|---------------|
| FLA | LRA | 100% | 75% | 50% | Min. | 100% | 75% | 50% | FLT | LRT % | BDT % | | | | |
| 17.2 | 116.0 | 91.0 | 91.0 | 90.0 | 89.5 | 0.890 | 0.870 | 0.800 | 22.2 | 150 | 260 | 6309 | 6309 | 12 Lead 2Δ/Δ | 261 |

NAME PLATE

| | | | | | | | | | | | | | | | |
|--|--|-------------------------|---------------|--------|-----------------|-----------|--|-----------------------|-------|---|--|--|--|--|--|
|  North American Electric, Inc. | | | | | | | | | |  | | | CONNECTION DIAGRAMS 208-230V  | | |
| INVERTER DUTY 20:1 VT; 10:1 CT | | | | | | | | | | | | | | | |
| CAT NO: PE254TC-15-2 | | | FRAME 254TC | | | PHASE 3 | | | | | | | | | |
| HZ 60 | | S.F. 1.15 | | HZ 50 | | S.F. 1.0 | | ENCL TEFC | | IP 55 | | | | | |
| HP 15 | | RPM 3545 | | HP 15 | | RPM 2930 | | DUTY CONT | | DES B | | | | | |
| VOLTS 208-230/460 | | | VOLTS 190/380 | | | AMB 40° C | | | INS F | | | | | | |
| FLA 36.2 - 34.4 / 17.2 | | FLA 42/21 | | | DE BEARING 6309 | | | | | | | | | | |
| CODE G | | P.F. 0.89 | | CODE F | | P.F. 0.90 | | ODE BEARING 6309 | | | | | | | |
| EFF 91.0 | | MIN 89.5 | | EFF 89 | | MIN 87.5 | | LUB: Mobil Polyrex EM | | | | | | | |
| MOTOR WEIGHT 261 LBS | | CONNECTION 12 Lead 2Δ/Δ | | | SER NO | | | | | | | | | | |
| General purpose use on industrial machinery installed in damp, dusty or dirty environments. Hernando, Mississippi | | | | | | | | | |    CC 082A | | | 460V  | | |

APPLICATIONS:

General purpose use on pumps, fans, blowers, compressors, conveyors, material handling and other industrial machinery installed in damp, dusty or dirty environments.