



# WORLDWIDE ELECTRIC MOTOR DATA SHEET



## WWE10-36-215JM

HORSEPOWER	10		
RPM / POLES	3600 / 2		
VOLTAGE / PHASE	230 / 460 V / 3		
FRAME	215JM		
ENCLOSURE / DEGREE OF PROTECTION	TEFC / IP54		
FREQUENCY	60 HZ Suitable For 50 HZ Operation With 1.0 SF		
FULL LOAD SPEED	3520 RPM		
SERVICE FACTOR	1.15		
INSULATION CLASS	F		
FULL LOAD AMPS; 230 / 460	22.4 / 11.2 A		
LOCKED ROTOR AMPS (STARTING); 230 / 460	162 / 81.0 A		
NO LOAD CURRENT	5.6 / 2.8 A		
NEMA CODE LETTER	H		
EFFICIENCY / POWER FACTOR	<u>LOAD</u>	<u>EFF.</u>	<u>P.F.</u>
	100%	89.5%	0.89
	75%	89.8%	0.86
	50%	89.2%	0.81
DUTY CYCLE	CONTINUOUS		
TORQUE	<u>FULL LOAD</u>	<u>LRT</u>	<u>BDT</u>
	15.0 lb.ft.	220%	330%
SLIP	2.22%		
NEMA DESIGN	B		
MOMENT OF INERTIA	0.310 lb.ft. <sup>2</sup>		
MAX. TIME LOCKED ROTOR (Hot)	20 Seconds		
MAX. AMBIENT TEMPERATURE	40° C		
MAX. ELEVATION	3300 Ft. Above Sea Level		
TEMPERATURE RISE (At Full Load)	80° C		
DE BEARING	6309ZZ		
ODE BEARING	6306ZZ		
REGREASING INT. - DE BEARING	N/A		
REGREASING INT. - ODE BEARING	N/A		
GREASE TYPE	Mobil Polyrex EM		
MOUNTING	F1 (F2 Suitable)		
ROTATION	Bi-Directional		
SHAFT MATERIAL	1045 Carbon Steel		
CONNECTION DIAGRAM	230 / 460 V - 9 Lead Δ		
APPROXIMATE WEIGHT	181 Lbs.		




CC006A





**CERTIFIED**

# NEMA FRAME 215JM

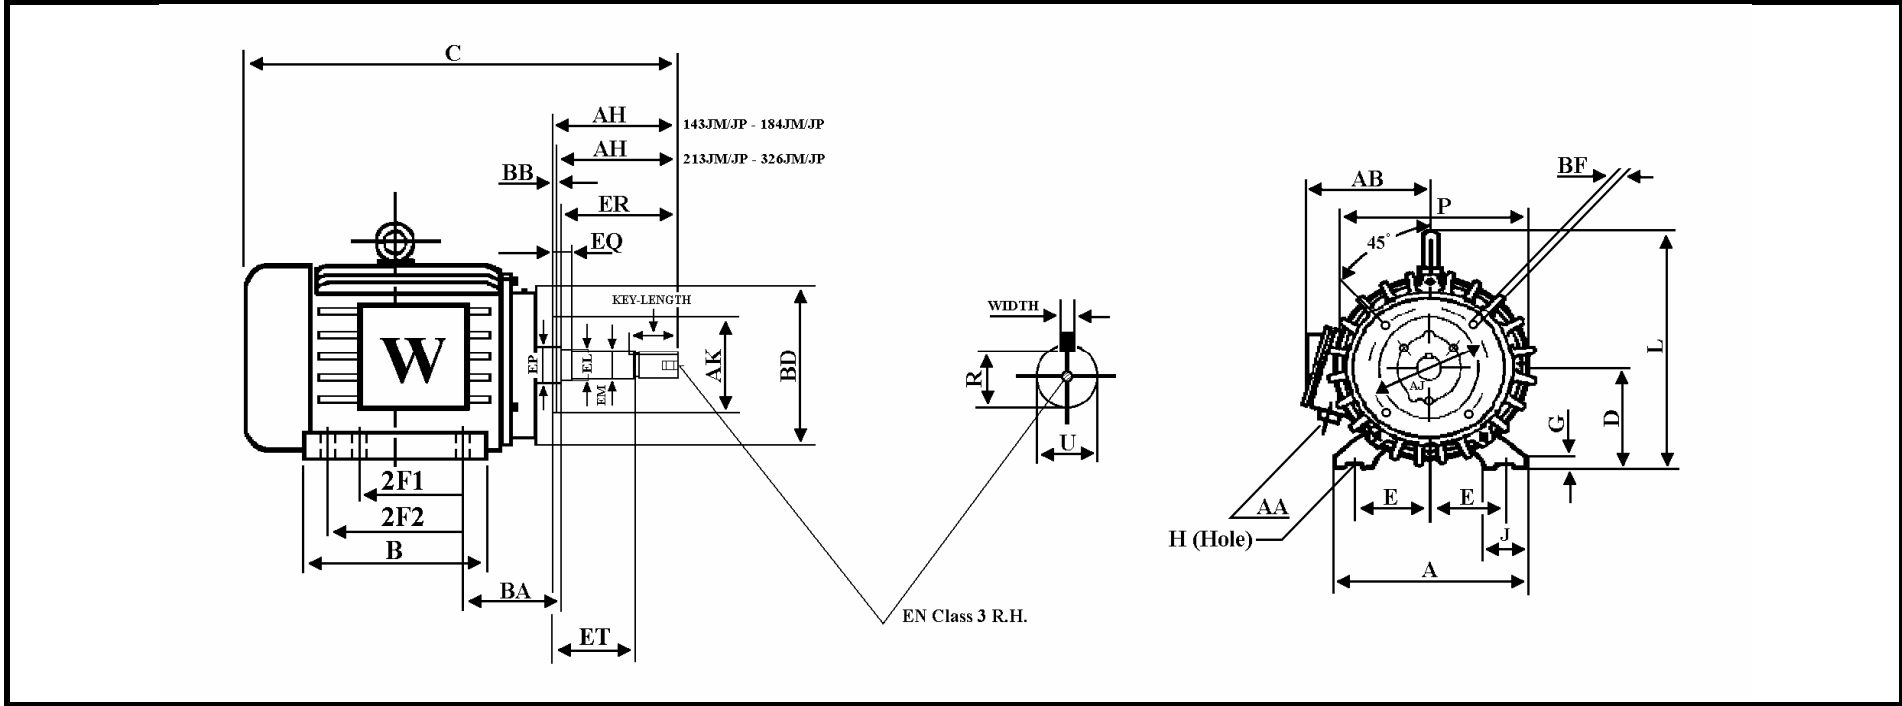

## DIMENSIONS - Inches

MOUNTING					A	B	C	D	G	J	P	L	AH	AB	EQ	AA
E	2F1	2F2	H	BA												
4.25	5.5	7	0.41	4.25	10.5	9	22	5.25	0.709	2.36	10.63	12.4	4.25	8.27	0.625	1" NPT

KEY		KEYSET	U	FLANGE					ET	EM	EL	EP	ER	EN
WIDTH	LENGTH	R		AK	AJ	BF	BB	BD						
0.188	1.732	0.771	0.875	8.5	7.25	1/2-13	0.256	8.9	2.875	1	1.25	1.772	4.496	3/8-16