



# WORLDWIDE ELECTRIC MOTOR DATA SHEET

## WWE20-36-256JM



HORSEPOWER	20		
RPM / POLES	3600 / 2		
VOLTAGE / PHASE	230 / 460 V / 3		
FRAME	256JM		
ENCLOSURE / DEGREE OF PROTECTION	TEFC / IP54		
FREQUENCY	60 HZ Suitable For 50 HZ Operation With 1.0 SF		
FULL LOAD SPEED	3550 RPM		
SERVICE FACTOR	1.15		
INSULATION CLASS	F		
FULL LOAD AMPS; 230 / 460	45.0 / 22.5 A		
LOCKED ROTOR AMPS (STARTING); 230 / 460	290 / 145 A		
NO LOAD CURRENT	11.0 / 5.5 A		
NEMA CODE LETTER	G		
EFFICIENCY / POWER FACTOR	<u>LOAD</u>	<u>EFF.</u>	<u>P.F.</u>
	100%	90.2%	0.88
	75%	90.1%	0.86
	50%	89.1%	0.87
DUTY CYCLE	CONTINUOUS		
TORQUE	<u>FULL LOAD</u>	<u>LRT</u>	<u>BDT</u>
	29.8 lb.ft.	170%	260%
SLIP	1.38%		
NEMA DESIGN	B		
MOMENT OF INERTIA	1.19 lb.ft. <sup>2</sup>		
MAX. TIME LOCKED ROTOR (Hot)	20 Seconds		
MAX. AMBIENT TEMPERATURE	40° C		
MAX. ELEVATION	3300 Ft. Above Sea Level		
TEMPERATURE RISE (At Full Load)	80° C		
DE BEARING	6309		
ODE BEARING	6209		
REGREASING INT. - DE BEARING	4,000 Hours (0.46 oz.)		
REGREASING INT. - ODE BEARING	4,000 Hours (0.29 oz.)		
GREASE TYPE	Mobil Polyrex EM		
MOUNTING	F1 (F2 Suitable)		
ROTATION	Bi-Directional		
SHAFT MATERIAL	1045 Carbon Steel		
CONNECTION DIAGRAM	230 / 460 V - 9 Lead Δ		
APPROXIMATE WEIGHT	331 Lbs.		




CC006A





# WORLDWIDE ELECTRIC MOTOR DRAWING

## WWE-256JM

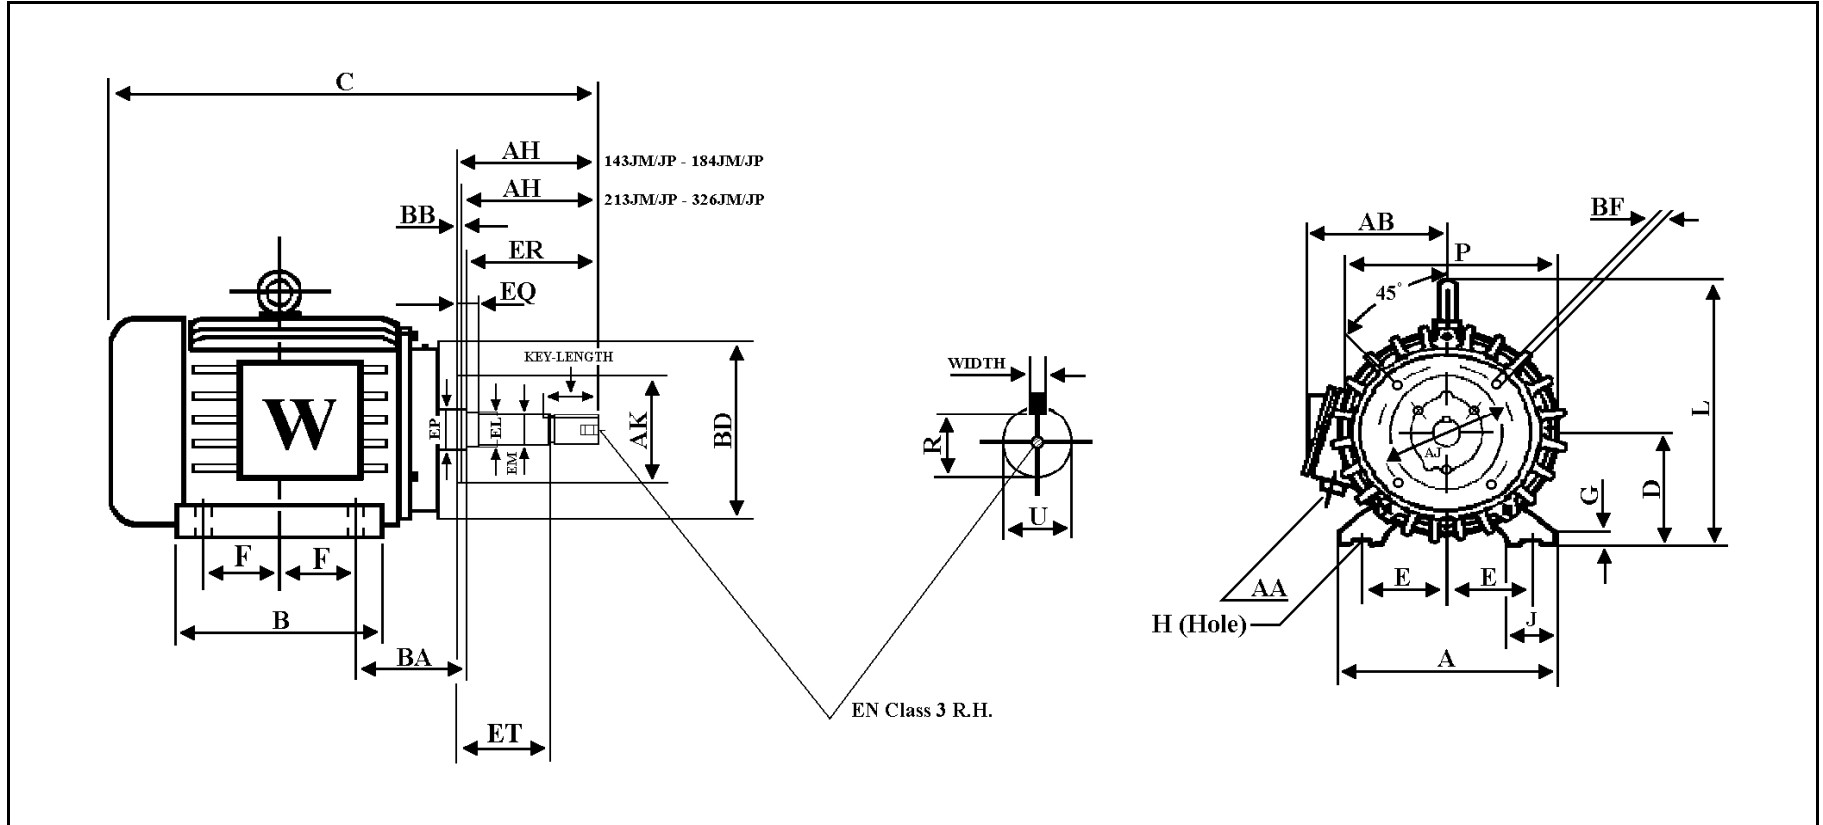

DIMENSIONS - INCHES

MOUNTING					A	B	C	D	G	J	P	L	AH	AB	EQ	AA
E	2F1	2F2	H	BA												
5	8.25	10	0.53	4.25	12.5	12.5	26.89	6.25	0.787	2.36	13.03	15.12	5.25	11.22	6.25	1.5

KEY		KEYSET R	U	FLANGE					ET	EM	EL	EP	ER	EN
WIDTH	LENGTH			AK	AJ	BF	BB	BD						
0.252	2.6	1.112	1.250	8.5	7.25	1/2-13	0.256	10	3	1.375	1.75	1.772	5.51	1/2-13