



# WORLDWIDE ELECTRIC MOTOR DATA SHEET

## WWE25-36-256JM



HORSEPOWER	25		
RPM / POLES	3600 / 2		
VOLTAGE / PHASE	230 / 460 V / 3		
FRAME	256JM		
ENCLOSURE / DEGREE OF PROTECTION	TEFC / IP54		
FREQUENCY	60 HZ Suitable For 50 HZ Operation With 1.0 SF		
FULL LOAD SPEED	3540 RPM		
SERVICE FACTOR	1.15		
INSULATION CLASS	F		
FULL LOAD AMPS; 230 / 460	56.0 / 28.0 A		
LOCKED ROTOR AMPS (STARTING); 230 / 460	352 / 176 A		
NO LOAD CURRENT	13.2 / 6.6 A		
NEMA CODE LETTER	G		
EFFICIENCY / POWER FACTOR	<u>LOAD</u>	<u>EFF.</u>	<u>P.F.</u>
	100%	91.0%	0.89
	75%	91.3%	0.90
	50%	91.9%	0.86
DUTY CYCLE	CONTINUOUS		
TORQUE	<u>FULL LOAD</u>	<u>LRT</u>	<u>BDT</u>
	37.25 lb.ft.	150%	240%
SLIP	1.78%		
NEMA DESIGN	B		
MOMENT OF INERTIA	1.25 lb.ft. <sup>2</sup>		
MAX. TIME LOCKED ROTOR (Hot)	20 Seconds		
MAX. AMBIENT TEMPERATURE	40° C		
MAX. ELEVATION	3300 Ft. Above Sea Level		
TEMPERATURE RISE (At Full Load)	80° C		
DE BEARING	6309		
ODE BEARING	6209		
REGREASING INT. - DE BEARING	4,000 Hours (0.46 oz.)		
REGREASING INT. - ODE BEARING	4,000 Hours (0.29 oz.)		
GREASE TYPE	Mobil Polyrex EM		
MOUNTING	F1		
ROTATION	Bi-Directional		
SHAFT MATERIAL	1045 Carbon Steel		
CONNECTION DIAGRAM	230 / 460 V - 9 Lead Δ		
APPROXIMATE WEIGHT	335 Lbs.		




CC006A





**CERTIFIED**

# NEMA FRAME 256JM

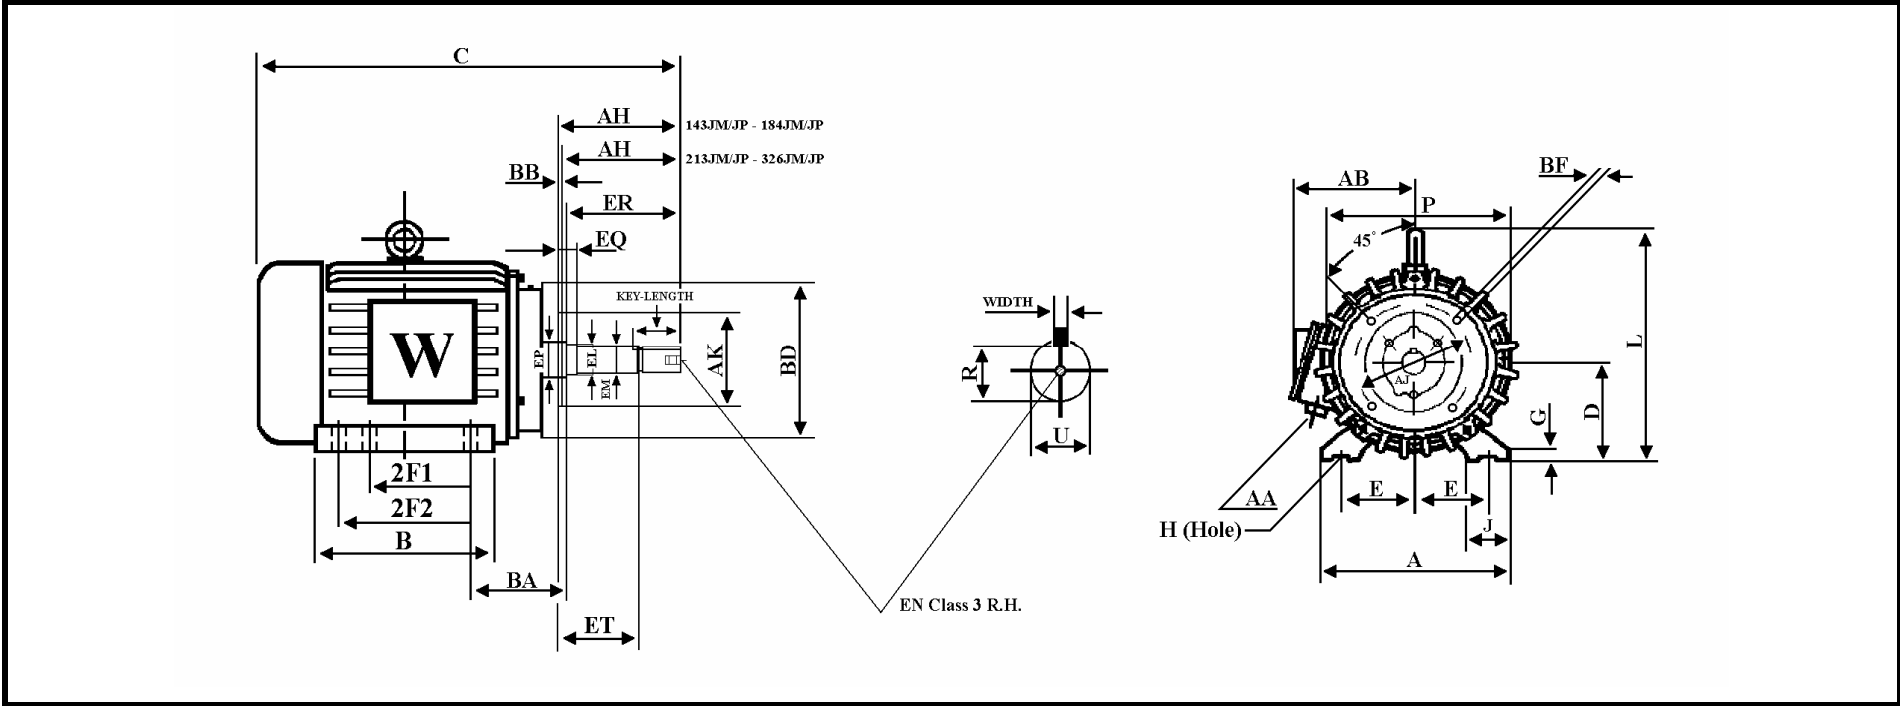

## DIMENSIONS - Inches

MOUNTING					A	B	C	D	G	J	P	L	AH	AB	EQ	AA
E	2F1	2F2	H	BA												
5	8.25	10	0.53	4.25	12.5	12.5	26.89	6.25	0.787	2.76	13.03	15.12	5.25	11.22	6.25	1.5" NPT

KEY		KEYSET		U	FLANGE					ET	EM	EL	EP	ER	EN
WIDTH	LENGTH	R	AK		AJ	BF	BB	BD							
0.252	2.6	1.112	1.250	8.5	7.25	1/2-13	0.256	10	3	1.375	1.75	1.772	5.51	1/2-13	