



# WORLDWIDE ELECTRIC MOTOR DATA SHEET



## WWE2-36-145JM

HORSEPOWER	2		
RPM / POLES	3600 / 2		
VOLTAGE / PHASE	230 / 460 V / 3		
FRAME	145JM		
ENCLOSURE / DEGREE OF PROTECTION	TEFC / IP54		
FREQUENCY	60 HZ Suitable For 50 HZ Operation With 1.0 SF		
FULL LOAD SPEED	3480 RPM		
SERVICE FACTOR	1.15		
INSULATION CLASS	F		
FULL LOAD AMPS; 230 / 460	5.0 / 2.5 A		
LOCKED ROTOR AMPS (STARTING); 230 / 460	50.0 / 25.0 A		
NO LOAD CURRENT	1.82 / 0.91 A		
NEMA CODE LETTER	L		
EFFICIENCY / POWER FACTOR	<u>LOAD</u>	<u>EFF.</u>	<u>P.F.</u>
	100%	84.0%	0.87
	75%	83.5%	0.83
	50%	83.2%	0.74
DUTY CYCLE	CONTINUOUS		
TORQUE	<u>FULL LOAD</u>	<u>LRT</u>	<u>BDT</u>
	3.0 lb.ft.	200%	270%
SLIP	3.33%		
NEMA DESIGN	B		
MOMENT OF INERTIA	0.0425 lb.ft. <sup>2</sup>		
MAX. TIME LOCKED ROTOR (Hot)	20 Seconds		
MAX. AMBIENT TEMPERATURE	40° C		
MAX. ELEVATION	3300 Ft. Above Sea Level		
TEMPERATURE RISE (At Full Load)	80° C		
DE BEARING	6206ZZ		
ODE BEARING	6205ZZ		
REGREASING INT. - DE BEARING	---		
REGREASING INT. - ODE BEARING	---		
GREASE TYPE	Mobil Polyrex EM		
MOUNTING	F1 (F2 Suitable)		
ROTATION	Bi-Directional		
SHAFT MATERIAL	1045 Carbon Steel		
CONNECTION DIAGRAM	230 / 460 V - 9 Lead Y		
APPROXIMATE WEIGHT	50 Lbs.		




CC006A





# WORLDWIDE ELECTRIC MOTOR DRAWING

## WWE-145JM

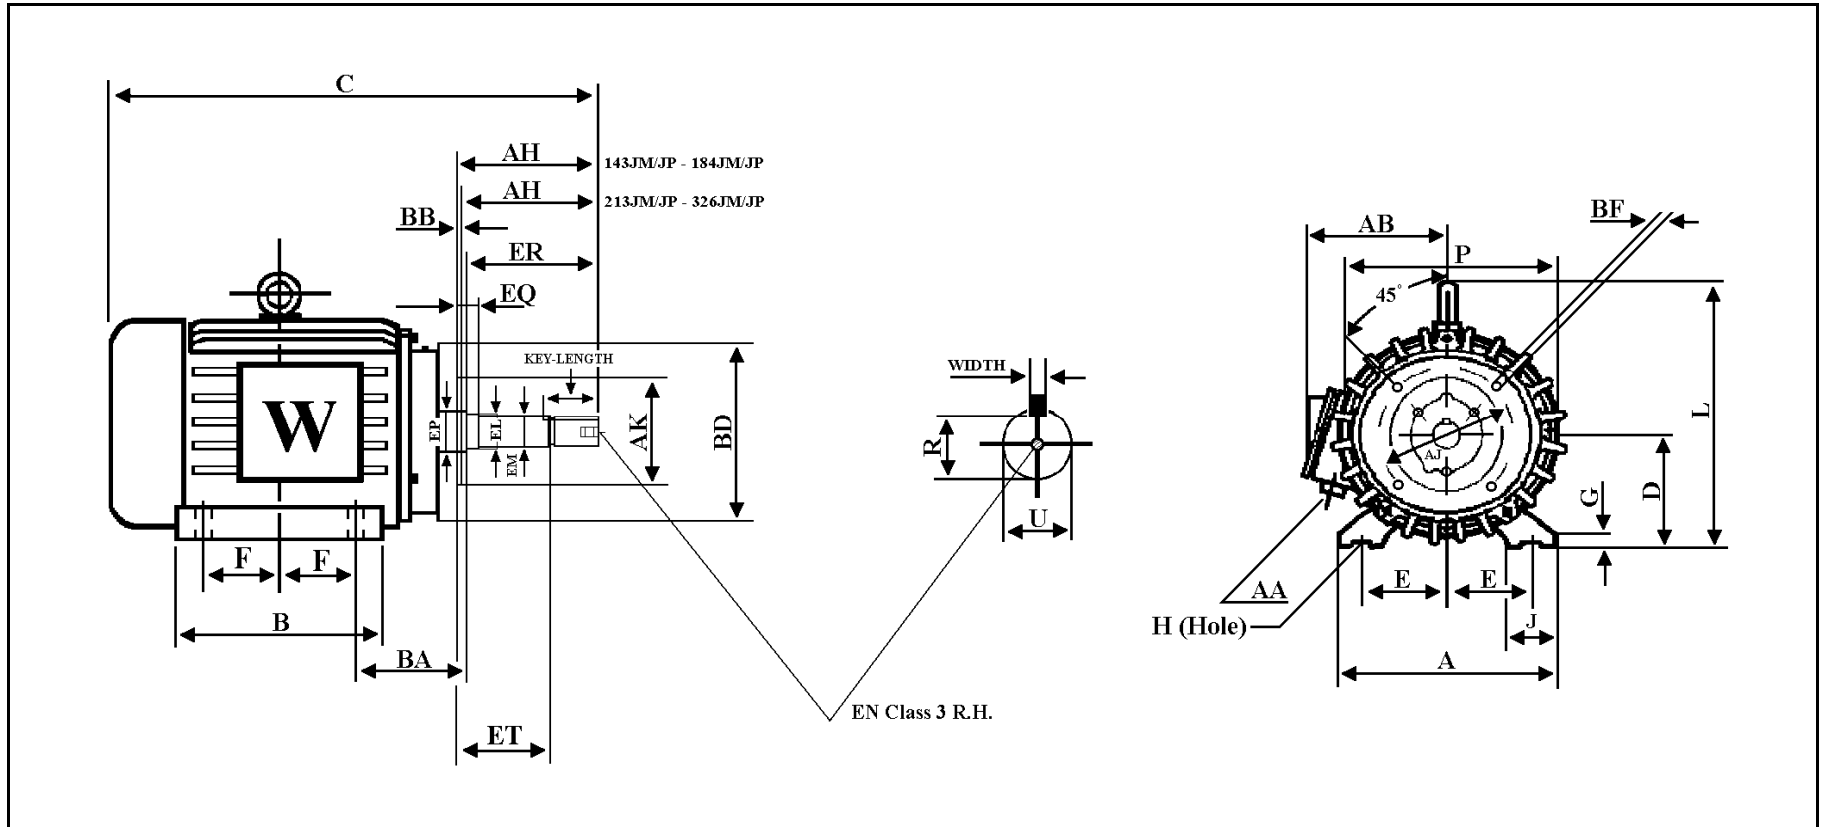

DIMENSIONS - INCHES

MOUNTING					A	B	C	D	G	J	P	L	AH	AB	EQ	AA
E	2F1	2F2	H	BA												
2.75	4	5	0.34	2.75	7	6	15.91	3.5	0.472	1.45	7.16	7.08	4.25	6.89	0.625	3/4

KEY		KEYSET R	U	FLANGE					ET	EM	EL	EP	ER	EN
WIDTH	LENGTH			AK	AJ	BF	BB	BD						
0.188	1.772	0.771	0.875	4.5	5.875	3/8-16	0.15	6.575	2.875	1	1.155	1.181	4.37	3/8-16