



WORLDWIDE ELECTRIC MOTOR DATA SHEET

IXPEWWE200-18-445/7/9TC




HORSEPOWER	200		
RPM / POLES	1800 / 4		
VOLTAGE / PHASE	460 V / 3		
FRAME	445/7/9TC		
ENCLOSURE / DEGREE OF PROTECTION	TEFC / IP55		
FREQUENCY	60 HZ Suitable For 50 HZ Operation With 1.0 SF		
FULL LOAD SPEED	1789 RPM		
SERVICE FACTOR	1.15 SF		
INSULATION CLASS	F		
FULL LOAD AMPS	217 A		
LOCKED ROTOR AMPS (STARTING)	1450 A		
NO LOAD CURRENT			
NEMA CODE LETTER	G		
EFFICIENCY / POWER FACTOR	<u>LOAD</u>	<u>EFF.</u>	<u>P.F.</u>
	100%	96.2%	0.85
	75%	96.2%	0.87
	50%	95.8%	0.84
DUTY CYCLE	S1 / Continuous		
TORQUE	<u>FULL LOAD</u>	<u>LRT</u>	<u>BDT</u>
	587 lb.ft.	100%	200%
SLIP	0.61%		
NEMA DESIGN	B		
MOMENT OF INERTIA			
NUMBER OF STARTS (Hot / Cold)	1 Hot / 2 Cold (Per Hour)		
MAX. AMBIENT TEMPERATURE	40° C		
MAX. ELEVATION	3300 Ft. Above Sea Level		
TEMPERATURE RISE (At Full Load)	80° C		
DE BEARING	6318		
ODE BEARING	6314		
GREASE TYPE	Mobil Polyrex EM		
MOUNTING	F1		
ROTATION	Bi-Directional		
APPROXIMATE WEIGHT	2348 lbs.		
TEMPERATURE CODE AT 40°C AMBIENT	T3C		
TEMPERATURE CODE AT 55°C AMBIENT	T2C		
AREA CLASSIFICATION	Class I, Division I, Groups C & D		
	Class II, Division I, Groups F & G		
INVERTER RATING	5:1 CT / 10:1 VT PWM Type		





WORLDWIDE ELECTRIC MOTOR DRAWING

IXPEWWE-445/7/9TC

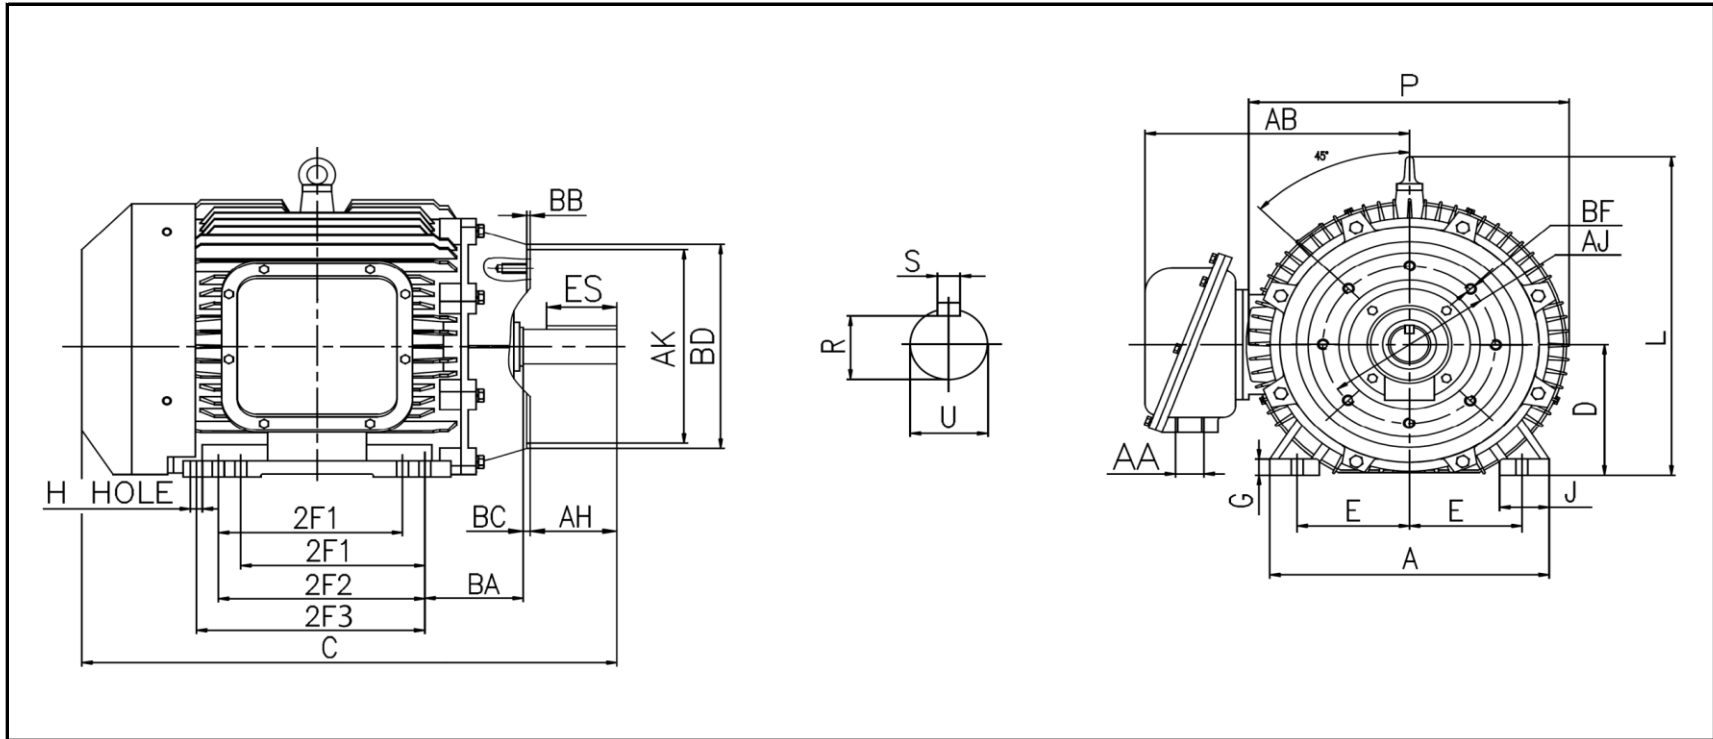

MOUNTING													
E	2F1	2F2	2F3	H	BA	A	C	D	G	J	L	P	
9	16.5	20	25	0.81	7.5	21.3	55.5	11	1.378	3.75	28	24	

		KEY		KEYSEAT	FLANGE				SHAFT			
AA	AB	BC	ES	S	R	AJ	AK	BB	BD	BF	AH	U
3	21.3	0.25	6.91	0.875	2.88	14	16	0.25	18	8x5/8"-11	8.25	3.375

ALL DIMENSIONS IN INCHES