



WORLDWIDE ELECTRIC MOTOR DATA SHEET



PEWWE5-36-184T

HORSEPOWER	5		
RPM / POLES	3600 / 2		
VOLTAGE / PHASE	230 / 460 V / 3		
FRAME	184T		
ENCLOSURE / DEGREE OF PROTECTION	TEFC / IP54		
FREQUENCY	60 HZ Suitable For 50 HZ Operation With 1.0 SF		
FULL LOAD SPEED	3510 RPM		
SERVICE FACTOR	1.15		
INSULATION CLASS	F		
FULL LOAD AMPS; 230 / 460	11.9 / 5.96 A Usable On 208 V At 13.2 A		
LOCKED ROTOR AMPS (STARTING); 230 / 460	120 / 60.0 A		
NO LOAD CURRENT	5.0 / 2.5 A		
NEMA CODE LETTER	L		
EFFICIENCY / POWER FACTOR	<u>LOAD</u>	<u>EFF.</u>	<u>P.F.</u>
	100%	88.5%	0.88
	75%	89.0%	0.84
	50%	88.7%	0.74
DUTY CYCLE	CONTINUOUS		
TORQUE	<u>FULL LOAD</u>	<u>LRT</u>	<u>BDT</u>
	7.48 lb.ft.	280%	400%
SLIP	2.50%		
NEMA DESIGN	A		
MOMENT OF INERTIA	0.149 lb.ft. ²		
SOUND PRESSURE LEVEL	75 dB(A)		
MAX. TIME LOCKED ROTOR (Hot)	8 Seconds		
MAX. AMBIENT TEMPERATURE	40° C		
MAX. ELEVATION	3300 Ft. Above Sea Level		
TEMPERATURE RISE (At Full Load)	80° C		
DE BEARING	6306ZZC3		
ODE BEARING	6306ZZC3		
REGREASING INT. - DE BEARING	---		
REGREASING INT. - ODE BEARING	---		
GREASE TYPE	Mobil Polyrex EM		
MOUNTING	F1		
ROTATION	Bi-Directional		
C-FLANGE	PEW180TC		
D-FLANGE	PEW180TD		
SHAFT MATERIAL	1045 Carbon Steel		
CONNECTION DIAGRAM	230 / 460 V - 9 Lead Y		
APPROXIMATE WEIGHT	106 lbs.		
INVERTER RATING	4:1 CT / 10:1 VT PWM Type		




CC006A





WORLDWIDE ELECTRIC MOTOR DRAWING

PEWWE-184T-2P-6P

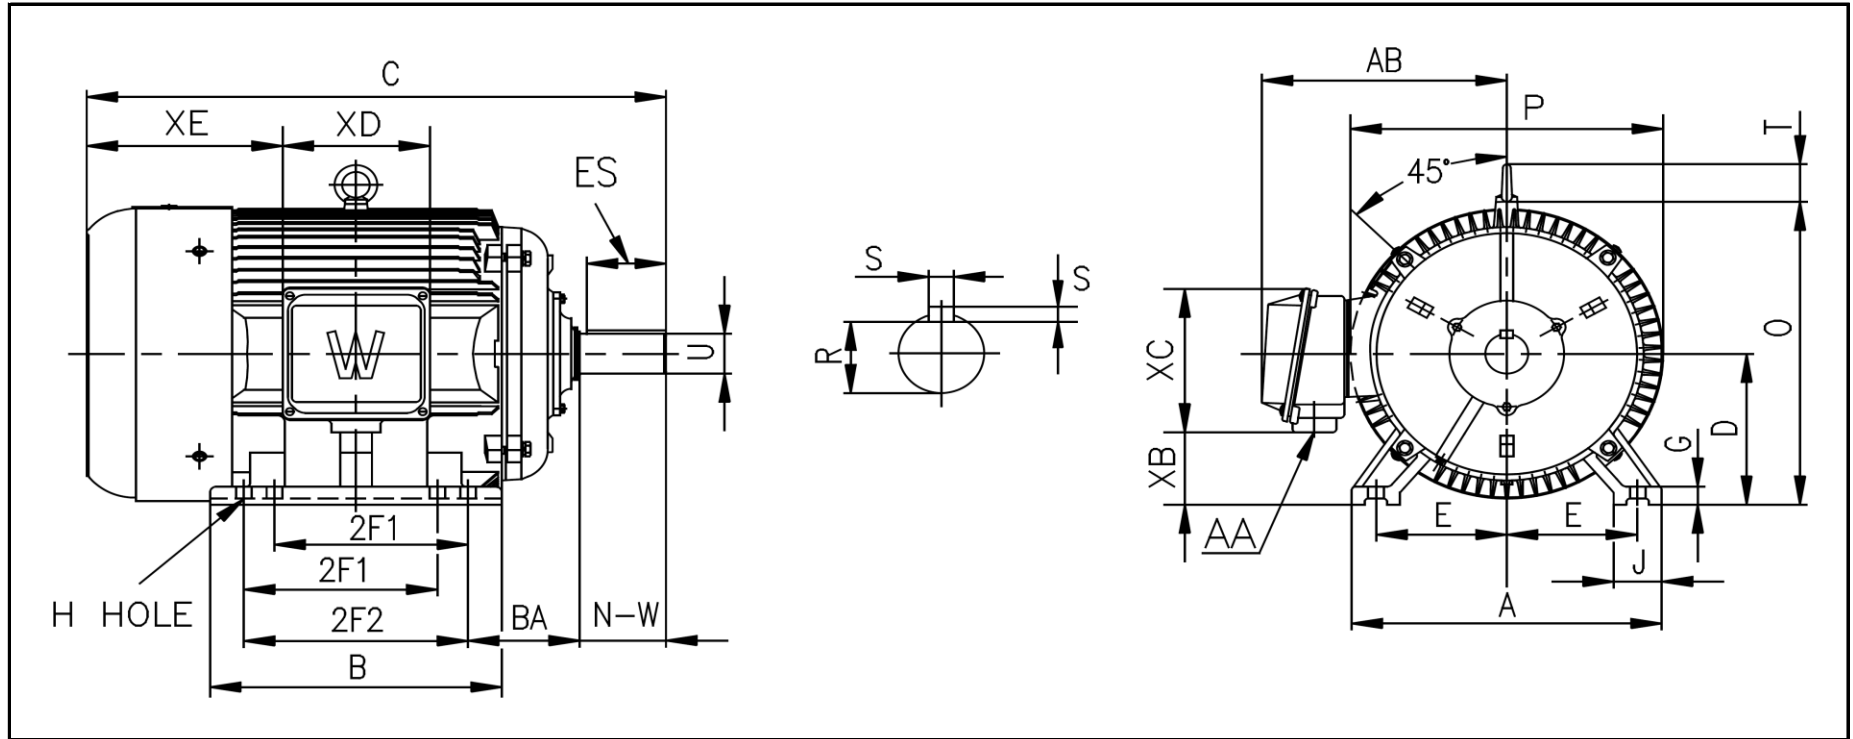

DIMENSIONS - INCHES

MOUNTING					A	B	C	D	G	J	P	O	T	AB
E	2F1	2F2	H	BA										
3.75	4.5	5.5	0.43	2.75	9	7.1	15.9	4.5	0.59	1.97	9.06	8.97	---	7.48

KEY		KEYSET	SHAFT		TERMINAL BOX				
S	ES	R	N-W	U	AA	XB	XC	XD	XE
0.25	1.78	0.986	2.75	1.125	1	2.05	5	4.57	5.39