



WORLDWIDE ELECTRIC MOTOR DATA SHEET



PEWWE25-9-326T

HORSEPOWER	25		
RPM / POLES	900 / 8		
VOLTAGE / PHASE	230 / 460 V / 3		
FRAME	326T		
ENCLOSURE / DEGREE OF PROTECTION	TEFC / IP54		
FREQUENCY	60 HZ Suitable For 50 HZ Operation With 1.0 SF		
FULL LOAD SPEED	875 RPM		
SERVICE FACTOR	1.15		
INSULATION CLASS	F		
FULL LOAD AMPS; 230 / 460	65.7 / 32.9 A Usable On 208 V At 72.6 A		
LOCKED ROTOR AMPS (STARTING); 230 / 460	365 / 182.5 A		
NO LOAD CURRENT	29.0 / 14.5 A		
NEMA CODE LETTER	G		
EFFICIENCY / POWER FACTOR	<u>LOAD</u>	<u>EFF.</u>	<u>P.F.</u>
	100%	90.2%	0.79
	75%	91.1%	0.74
	50%	91.0%	0.63
DUTY CYCLE	CONTINUOUS		
TORQUE	<u>FULL LOAD</u>	<u>LRT</u>	<u>BDT</u>
	150 lb.ft.	165%	220%
SLIP	2.78%		
NEMA DESIGN	B		
MOMENT OF INERTIA	9.32 lb.ft. ²		
SOUND PRESSURE LEVEL	68 dB(A)		
MAX. TIME LOCKED ROTOR (Hot)	6 Seconds		
MAX. AMBIENT TEMPERATURE	40° C		
MAX. ELEVATION	3300 Ft. Above Sea Level		
TEMPERATURE RISE (At Full Load)	80° C		
DE BEARING	6312 C3		
ODE BEARING	6311 C3		
REGREASING INT. - DE BEARING	6,800 Hours (0.75 oz.)		
REGREASING INT. - ODE BEARING	6,800 Hours (0.64 oz.)		
GREASE TYPE	Mobil Polyrex EM		
MOUNTING	F1		
ROTATION	Bi-Directional		
C-FLANGE	PEW320TC		
D-FLANGE	PEW320TD		
SHAFT MATERIAL	1045 Carbon Steel		
CONNECTION DIAGRAM	230 / 460 V - 12 Lead Δ		
APPROXIMATE WEIGHT	552 lbs.		
INVERTER RATING	2:1 CT / 4:1 VT PWM Type		




CC006A





WORLDWIDE ELECTRIC MOTOR DRAWING

PEWWE-326T

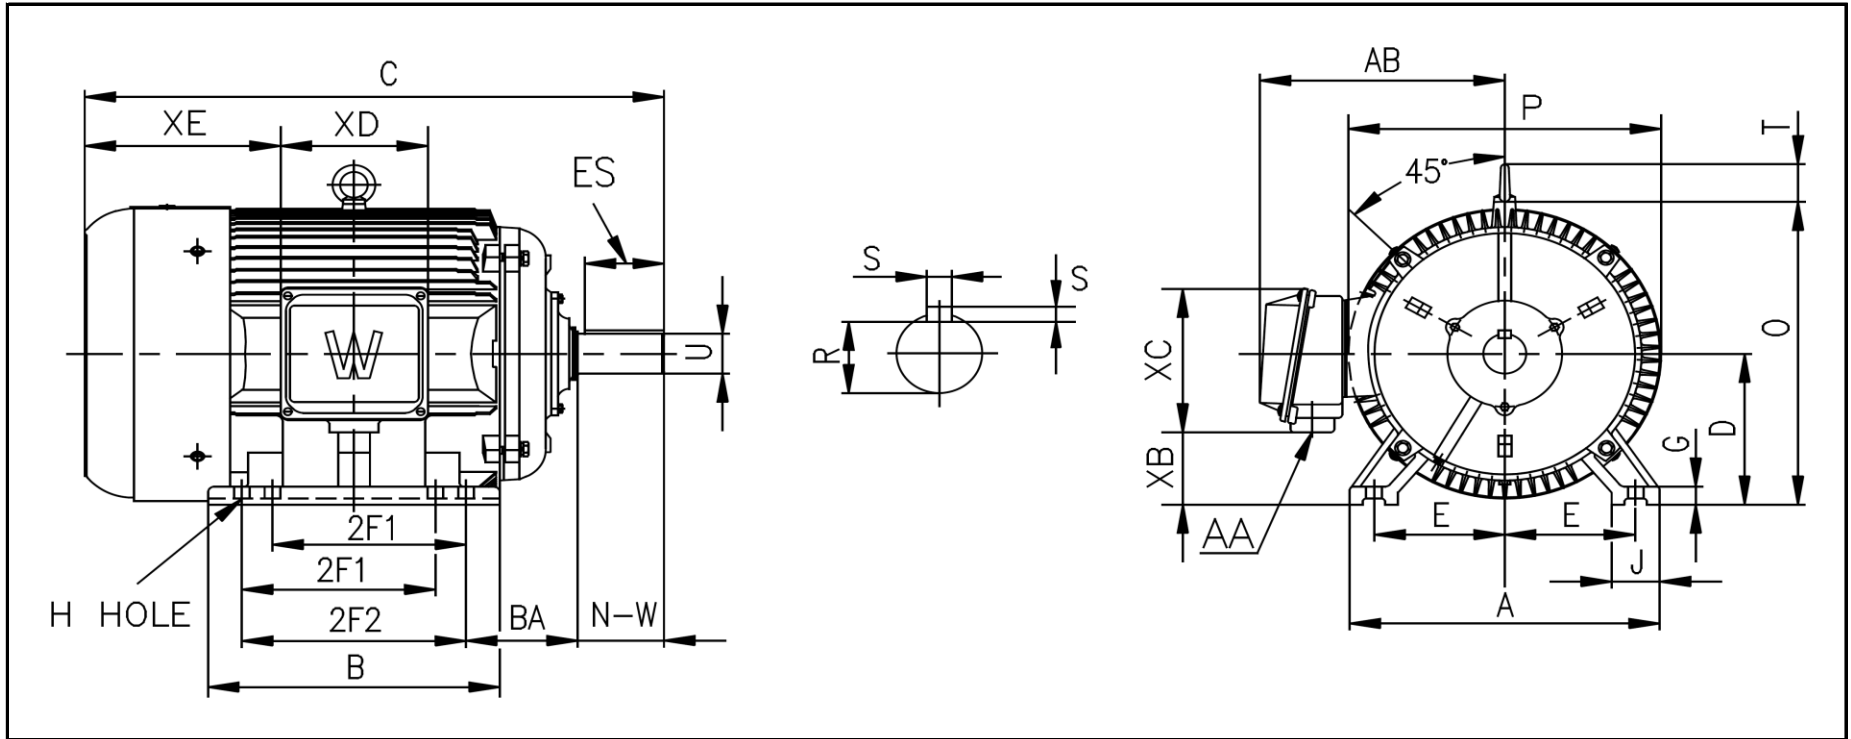

DIMENSIONS - INCHES

MOUNTING					A	B	C	D	G	J	P	O	T	AB
E	2F1	2F2	H	BA										
6.25	10.5	12	0.66	5.25	16	16.5	32.2	8	0.984	2.76	15.75	15.91	2.44	13.4

KEY		KEYSET	SHAFT		TERMINAL BOX				
S	ES	R	N-W	U	AA	XB	XC	XD	XE
0.5	3.91	1.845	5.25	2.125	2	2.64	10.55	8.98	11.2