



# WORLDWIDE ELECTRIC MOTOR DATA SHEET

## EP1-12-145TC



HORSEPOWER	1		
RPM / POLES	1200 / 6		
VOLTAGE / PHASE	230 / 460 V / 3		
FRAME	145TC		
ENCLOSURE / DEGREE OF PROTECTION	TEFC / IP55		
FREQUENCY	60 HZ Suitable For 50 HZ Operation With 1.0 SF		
FULL LOAD SPEED	1162 RPM		
SERVICE FACTOR	1.25 SF at 40° C / 1.0 SF at 55° C		
INSULATION CLASS	F		
FULL LOAD AMPS; 230 / 460	3.16 / 1.58 A		
LOCKED ROTOR AMPS (STARTING); 230 / 460	30.0 / 15.0 A		
NO LOAD CURRENT	2.5 / 1.25 A		
NEMA CODE LETTER	N		
EFFICIENCY / POWER FACTOR	<u>LOAD</u>	<u>EFF.</u>	<u>P.F.</u>
	100%	82.5%	0.72
	75%	82.0%	0.70
	50%	77.0%	0.58
DUTY CYCLE	S1 / Continuous		
TORQUE	<u>FULL LOAD</u>	<u>LRT</u>	<u>BDT</u>
	4.52 lb.ft.	220%	300%
SLIP	3.14%		
NEMA DESIGN	B		
MOMENT OF INERTIA	0.326 lb.ft. <sup>2</sup>		
NUMBER OF STARTS (Hot / Cold)	2 Hot / 3 Cold		
MAX. AMBIENT TEMPERATURE	40° C at 1.25 SF / 55° C at 1.0 SF		
MAX. ELEVATION	3300 Ft. Above Sea Level		
TEMPERATURE RISE (At Full Load)	80° C		
DE BEARING	6205ZZ		
ODE BEARING	6205ZZ		
GREASE TYPE	Mobil Polyrex EM		
MOUNTING	F1 (F2 Suitable)		
ROTATION	Bi-Directional		
APPROXIMATE WEIGHT	51 lbs.		
AREA CLASSIFICATION	Class I, Division 2, Groups A, B, C, D		
INVERTER RATING	10:1 CT / 20:1 VT PWM Type		
SPECIFICATION - In Accordance With	NEMA, CSA		



CC067A




MARCH 10, 2015



# WORLDWIDE ELECTRIC MOTOR DRAWING

## EP-145TC

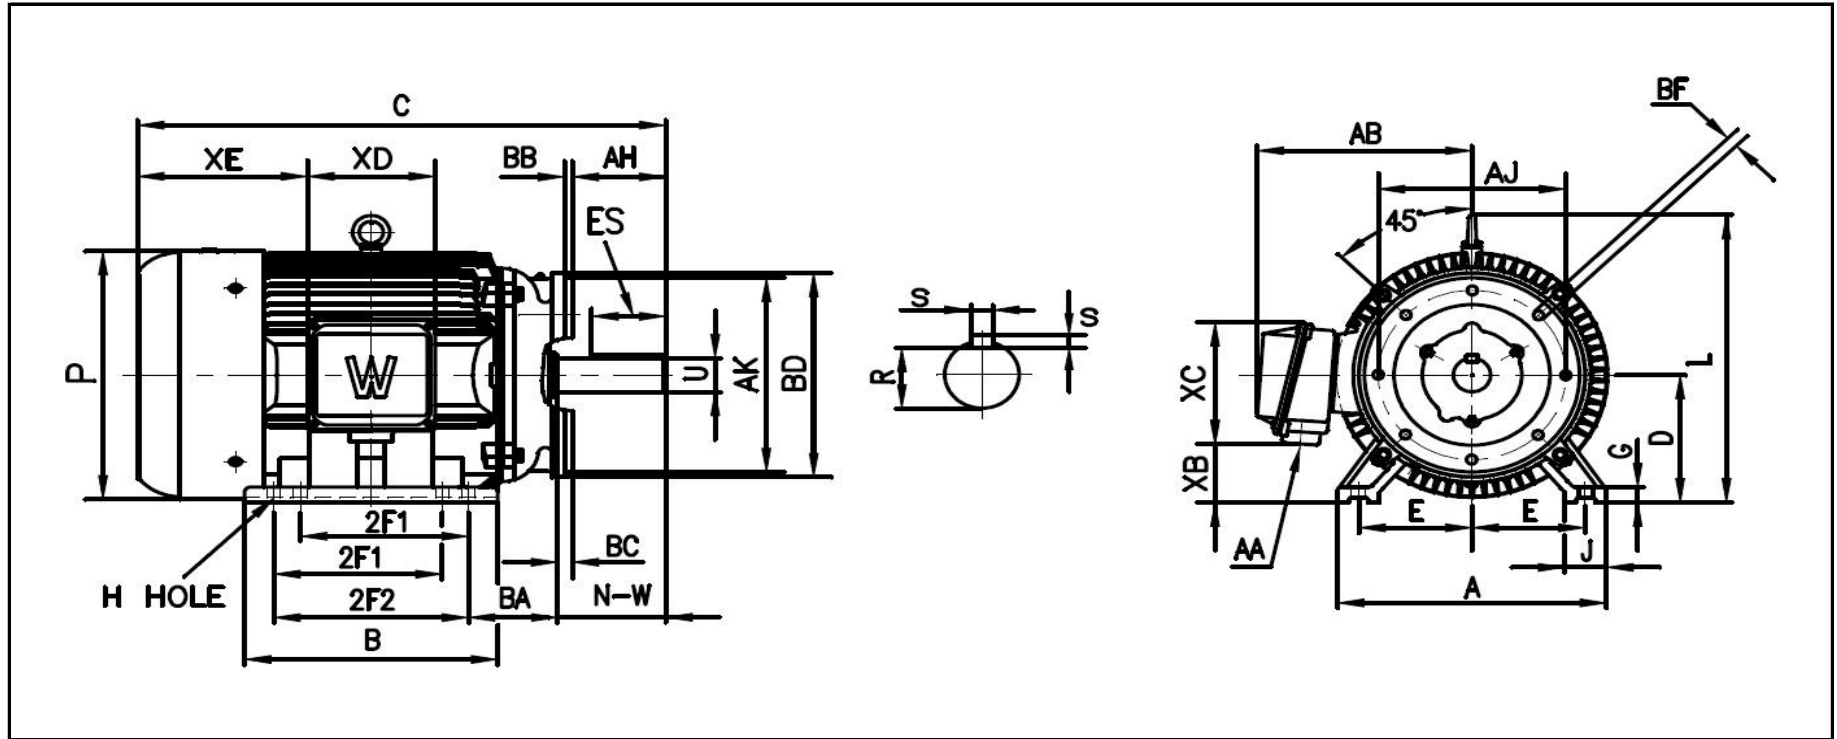

DIMENSIONS - INCHES

MOUNTING					A	B	C	D	G	J	P	L	AB	AH	BC
E	2F1	2F2	H	BA											
2.75	4	5	0.34	2.25	7	7.5	15.2	3.5	0.55	1.5	7.1	7.1	6.3	2.12	0.12

KEY		KEYSET	FLANGE				SHAFT		TERMINAL BOX					
S	ES	R	AK	AJ	BF	BB	BD	N-W	U	AA	XB	XC	XD	XE
0.188	1.41	0.771	4.5	5.875	3/8-16	0.16	6.5	2.25	0.875	3/4	1.8	4.5	4.1	4.7