

4		3		2		1			
GENERAL INFORMATION:				REV ECO E 0026376		REV BY DATE F.NAVARRO 05-28-2012		APPD DATE R.RASCON 05-28-2012	
SHAFT RUNOUT: .001[.03] T.I.R. PER INCH[mm] LENGTH OF EXTENSION.									
END PLAY: .010[.25] TO .063[1.60]									
BEARINGS: SLEEVE									
MOUNTING POSITION: HORIZONTAL									
ELECTRICAL DATA:									
OVERLOAD PROTECTOR: AUTOMATIC RESET (T.I. 7AM 034)									
LEADS: NO. 18 GA., .06[1.5] THK. 125°C INSUL. 2 CONDUCTOR BLACK RIPCORD									
GROUND LEAD: NO. 18 GA., .03[.08] THK. GREEN INSUL.									
NOTE: DISTRIBUTION: CUST. P/N: B6411 GRAINGER: CUST. P/N: 4KA45									
NAMEPLATE DATA :		EXTERNAL CONNECTION DIAGRAM							
MODEL NO.: 322P240 CUST. P/N: [] HP: 1/8 ROT: CCWLE RPM: 1050 TYPE: FE FRAME: 42Y VOLTS: 208-230 PH: 1 AMPS: 2.6 HZ: 60 INS: A AMB: 40 °C DUTY: AIR OVER CAP.: - UL LOGO THERMALLY PROTECTED TYPE C									
PERFORMANCE CURVE NO.		TORQUE @1075 RPM (25°C)		APPROVED SAMPLE		UL COMPONENT		CSA	
C31092		12.1 OZ. FT.		-		E46412 PRGY2		LR43341 260-Ø-0	
		GEOMETRIC CHARACTERISTICS & SYMBOLS ∇ FLATNESS — STRAIGHTNESS ∠ ANGULARITY ⊥ PERPENDICULARITY (SQUARENESS) // PARALLELISM ○ ROUNDNESS (CIRCULARITY) ⊘ CYLINDRICITY △ PROFILE OF ANY SURFACE ∧ PROFILE OF ANY LINE ↗ RUNOUT ⊕ TRUE POSITION ◎ CONCENTRICITY ≡ SYMMETRY		REGAL-BELOIT CORPORATION (RBC) PROVIDES TECHNICAL ASSISTANCE TO OUR CUSTOMERS IN SEVERAL AREAS. SINCE RBC DOES NOT RECEIVE ALL DATA CONCERNING THE USE AND APPLICATION OF THE MOTOR, THE SUITABILITY OF THE MOTOR FOR THE APPLICATION MUST BE DETERMINED BY THE CUSTOMER.		DR BY: J. RUPERT APPD: K. CORD THIRD ANGLE PROJECTION EDS DATE 11-11-2011 FORMAT REV H		REGAL-BELOIT CORPORATION	
		DIMENSIONS WITHOUT TOLERANCES ARE FOR REFERENCE ONLY.				CONFIDENTIAL: THIS DRAWING AND ITS INFORMATION ARE THE EXCLUSIVE AND CONFIDENTIAL PROPERTY OF REGAL-BELOIT CORPORATION AND ARE NOT TO BE DISCLOSED, DUPLICATED, DISTRIBUTED OR OTHERWISE USED WITHOUT THE WRITTEN CONSENT OF REGAL-BELOIT CORPORATION. -ALL RIGHTS RESERVED.		DESCRIPTION MODEL-RFHP-48FR OUTLINE	
						SIZE C		DWG NO 11674-024	
						SCALE NONE		SHEET 1	


ESCALA: NONE	HOJA: 1
--------------	---------



VERDE(TIERRA)	9.5/10.5 [241/267]	#10 OJAL
2 COND CABLE DUPLEX	35/38 [889/965]	.60[15.2] DESFORRE
	35/38 [889/965]	.60[15.2] DESFORRE
COLOR	LONGITUD	TERMINAL O LOGITUD DESFORRE
LEAD DATA		

CARCAZA—LADO OPUESTO CABLES	CERRADO
TAPA—LADO OPUESTO CABLES	CERRADO
CARCAZA—LADO DE CABLES	CERRADO
TAPA LADO DE CABLE	ABIERTO
CIERRE	

CURVA DE DESEMPEÑO	TORQUE @1075 RPM (25°C)	MUESTRA APROVADA	COMPONENT UL		CSA	
			ARCHIVO#	GUIA#	ARCHIVO#	GUIA#
C31092	12.1 OZ. FT.	—	E46412	PRGY2	LR43341	260-Ø-0

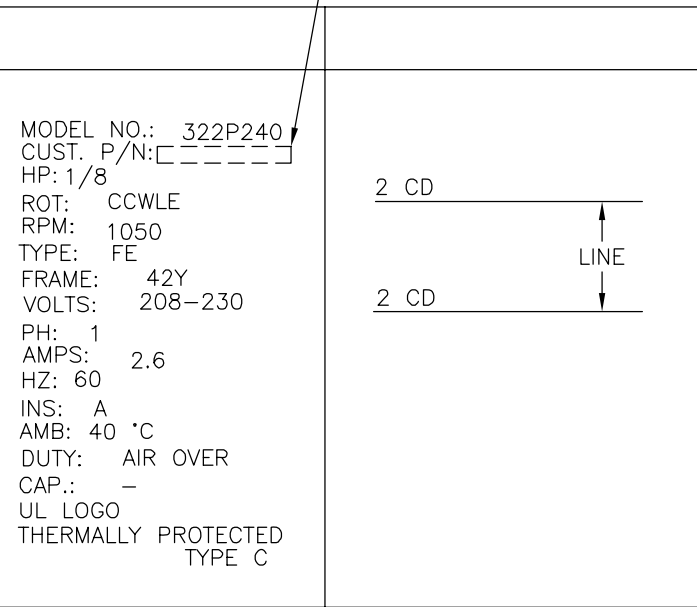


C31092	12.1 OZ. FT.	—	E46412	PRGY2	LR43341	260—Ø—0


形位公差	度
□	平面度
—	直线度
∠	倾斜度
⊥	垂直度
//	平行度
○	圆度
⌀	圆柱度
△	面轮廓度
⌒	线轮廓度
↗	圆跳动
⊕	位置度
◎	同轴度
≡	对称度

ASME Y14.5M 1994

REGAL-BELOIT CORPORATION
(RBC) 在个别领域为客户
提供技术支持。鉴于RBC
未收到任何涉及电机使用和
应用环境的数据，电机的适用性
由客户自己决定。

未注公差尺寸仅供参考。

绘图:	J. RUPERT	03-29-2001
批准:	K. CORD	03-30-2001
第三角投影		图纸格式发布日期 11-11-2011 图纸格式版本 H
机密：本图纸及相关信息所有权归REGAL-BELOIT CORPORATION 未经REGAL-BELOIT CORPORATION书面授权，不得泄露、 复制、传播或作其他用途。一版权所有		

绘图:	J. RUPERT	03-29-2001
批准:	K. CORD	03-30-2001
第三角投影		图纸格式发布日期 11-11-2011
		图纸格式版本 H

REGAL

REGAL-BELOIT CORPORATION

名称	
----	--

MODEL-RFHP-48FR OUTLINE

图幅

C

图号	
----	--

11

NONE

页号

1