


	8		7		6		5		4		3		2		1
GROUP	TYPE	FRAME	"C"	(BS)	(XA)	(XB)	(XG)	(XH)	(XJ)	(XK)	(XM)	(XN)	(XO)	(XP)	
-01	CP	P56N	14.49	6.73	2.01	2.01	4.46	4.06	3.46	5.06	3.09	2.89	4.63	4.74	
-02															
-03															

- NOTES:
- FACE OF MOUNTING FLANGE IS PERPENDICULAR TO SHAFT CENTERLINE WITHIN .004 T.I.R.
 - SHAFT RUNOUT NOT TO EXCEED .002 T.I.R.

ALL DIMENSIONS SHOWN IN PARENTHESIS ARE REFERENCE DIMENSIONS. ALL OTHER DIMENSIONS ARE TOLERANCED PER THE FOLLOWING CHART UNLESS OTHERWISE SPECIFIED.

"C" DIM.	= +/- .055
SHAFT EXT.	= +/- .034
LEAD LENGTHS	= +/- 1.00
EXTENDED THRU-BOLTS	= +/- .050
ANGULAR DIMS.	= +/- 2 DEGS.

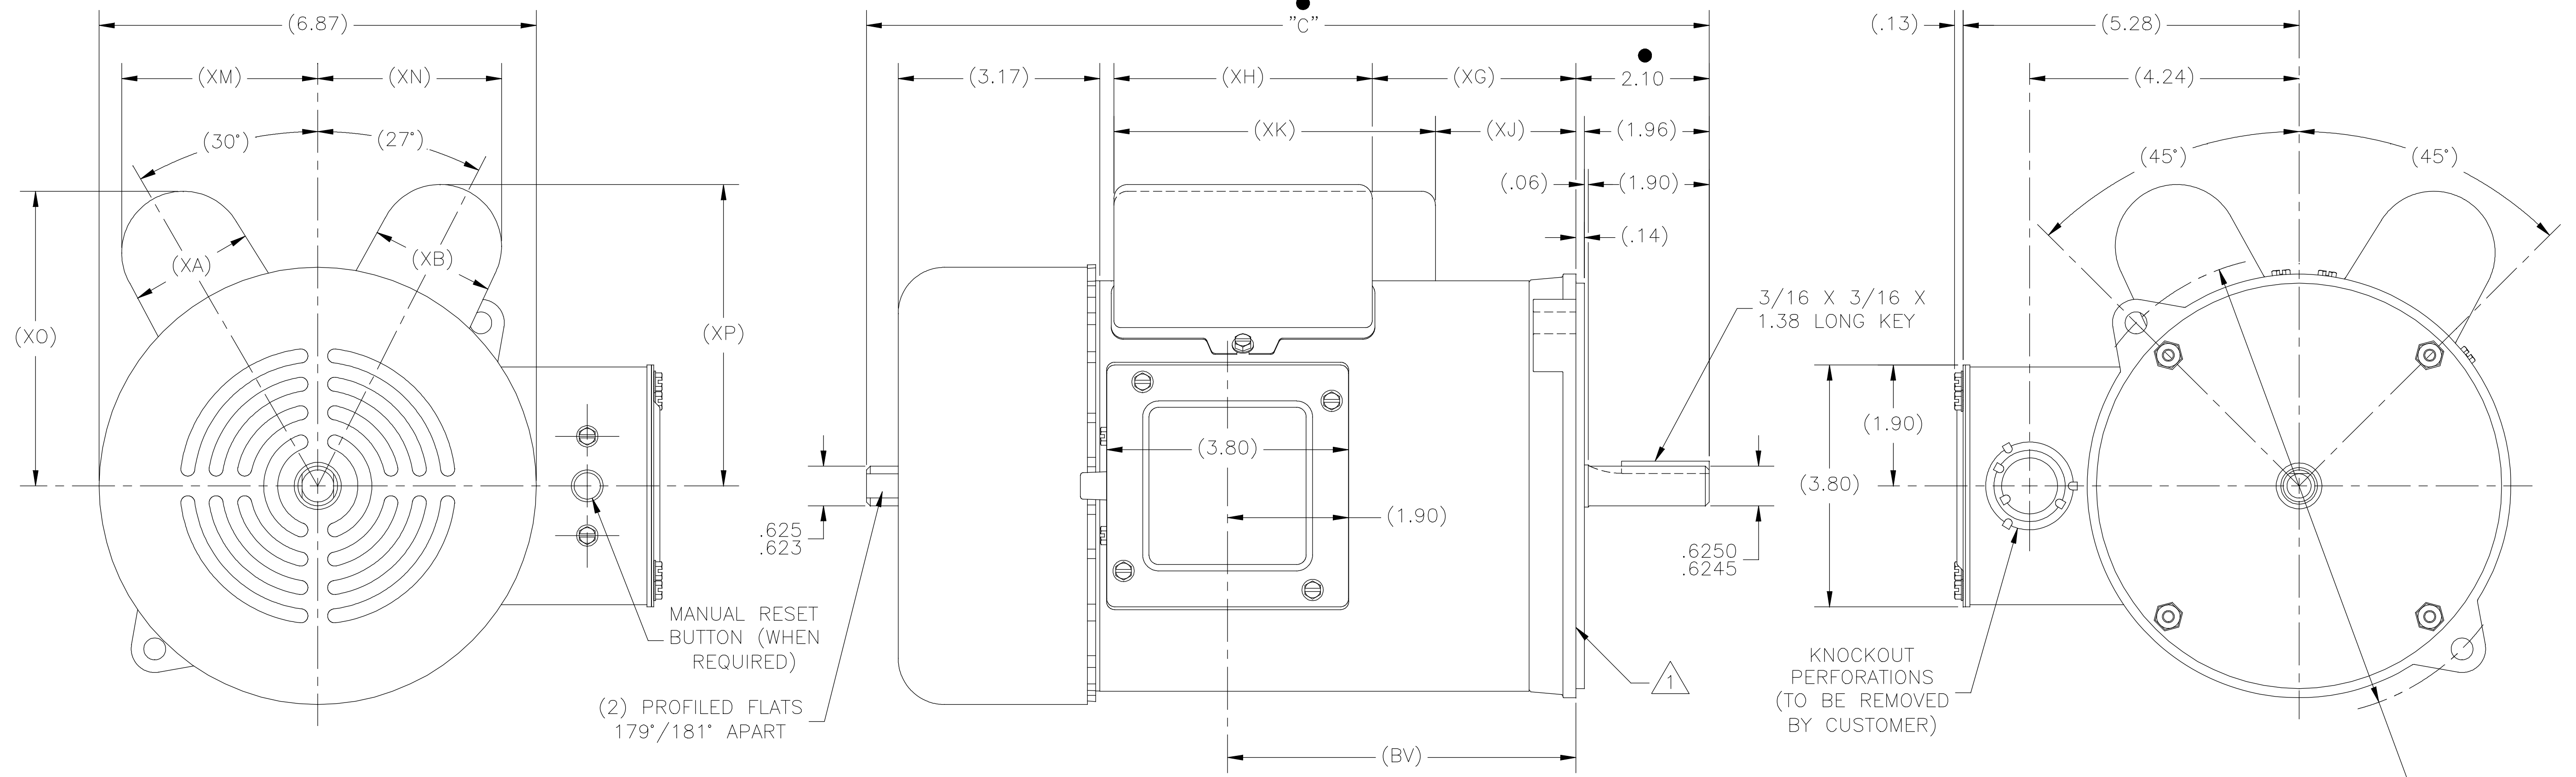

● = CRITICAL DIMENSION

DRAWING REVISION F	REVISION BY P.ROJAS	DATE 08-29-2018	TOLERANCES UNLESS OTHERWISE SPECIFIED DEC. INCH mm ANGLE	DRAWN BY AMB	DATE 01-05-1997	REGAL™ Regal Beloit America, Inc.
ECO-0151705	APPROVED BY P.ROJAS	DATE 08-29-2018	X ±0.1 ±2.51 ±0.5°	APPROVED BY		DESCRIPTION MODEL-CFHP-56FR OUTLINE
ECO DESCRIPTION SFF ECO			XX ±0.02 ±0.511	DATE		MATERIAL
			XXX ±0.005 ±0.1271	THIRD ANGLE PROJECTION		PROCESS/FINISH
			XXXX ±0.0005 ±0.01271	SIZE DWG NO D 189148		SHEET 1
			REMOVE BURRS & BREAK SHARP EDGES .003/.015 (0.076/.381)X45° CORNER FILLETS R.02 [L51] MACHINED SURFACES .125/ .32/ mm SHOWN IN [BRACKETS]			