



# TEFC

## THREE PHASE INDUCTION MOTOR

**TYPE**

LP, JP

CAST IRON FRAME


FRAME SIZE

OUTPUT(HP)

POLES

Hz

TIME RATING

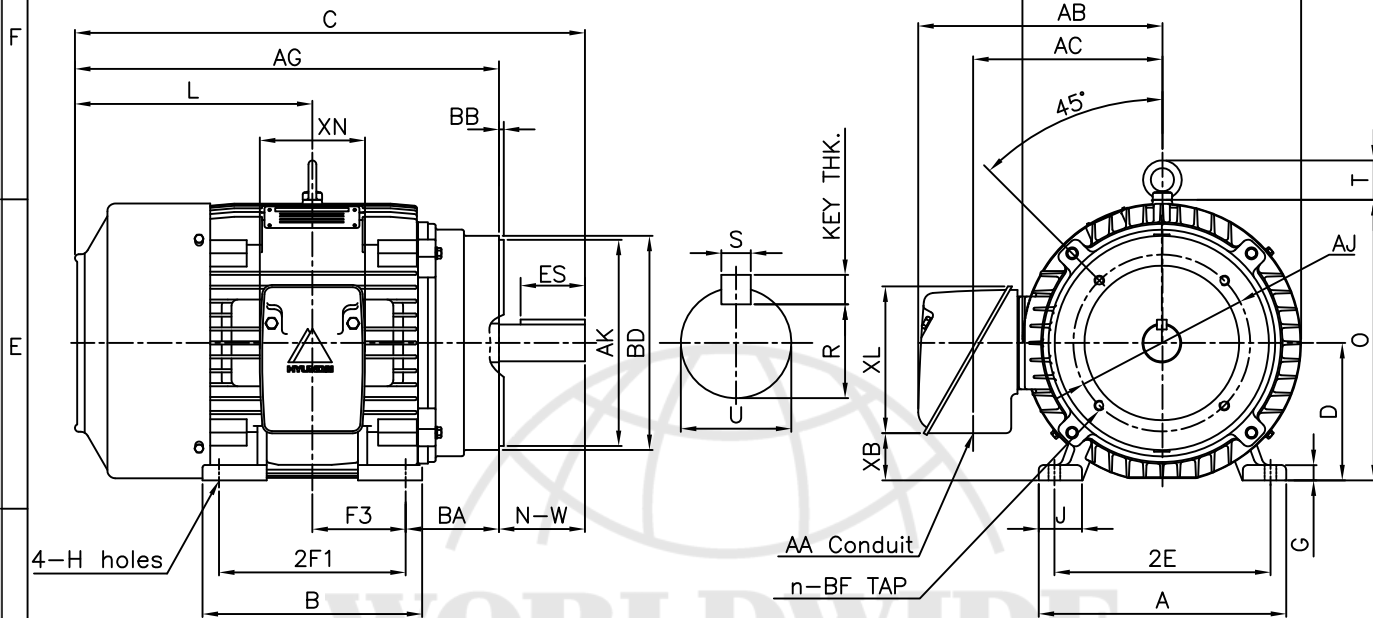

### DIMENSIONS

F L A N G E						M O U N T I N G								
AJ	AK	BD	BB	BF	n	A	B	2E	2F1	2F2	F3	G	J	H
9.00	10.50	10.9	0.25	1/2-13	4	12.60	11.18	11.00	9.50	-	4.75	0.78	2.20	0.53

C O N D U I T B O X						O V E R A L L						APPROX. WGT.(LB)		
AA	AB	AC	XB	XL	XN	AG	BA	C	D	L	O		P	T
1.50	12.43	9.64	3.42	7.56	6.61	21.59	4.75	26.21	7.00	12.09	14.28	14.19	2.01	380

S H A F T					KEY THK.	B E A R I N G	
U	N-W	KEYWAY				DRIVE END	OPP. DRIVE END
		R	ES	S			
1.875	4.62	1.591	3.28	0.500	0.500	6310ZC3	6310ZC3

### NOTE

- 1.Dimension "D" tolerance : +0.00inch - 0.03inch
- 2.Dimension "U" tolerance : +0.000inch - 0.0005inch
- 3.Dimension "R" tolerance : +0.000inch - 0.015inch

APPD BY	KIM.Y.S	UNIT	INCH	SUBJECT	NEMA 284TC	CAD PROJ \ FILE
CHKD BY	KO.S.H	SCALE	1/10	TITLE	OUTLINE	XSMOUTIN\A1309AA
CHKD BY		PROJEC'N	3rd Angle			
DSND BY	Y.J.HWANG	DATE	2004.11.19			



REF. NO	A1309AA	Sheet No.	of
DWG NO	350A1309AA	Revision No.	0