


	TEFC			TYPE	LP, JP
	THREE PHASE INDUCTION MOTOR				Cast iron frame

FRAME SIZE	OUTPUT(HP)	POLES	Hz	TIME RATING
445TC-F2			60	CONT

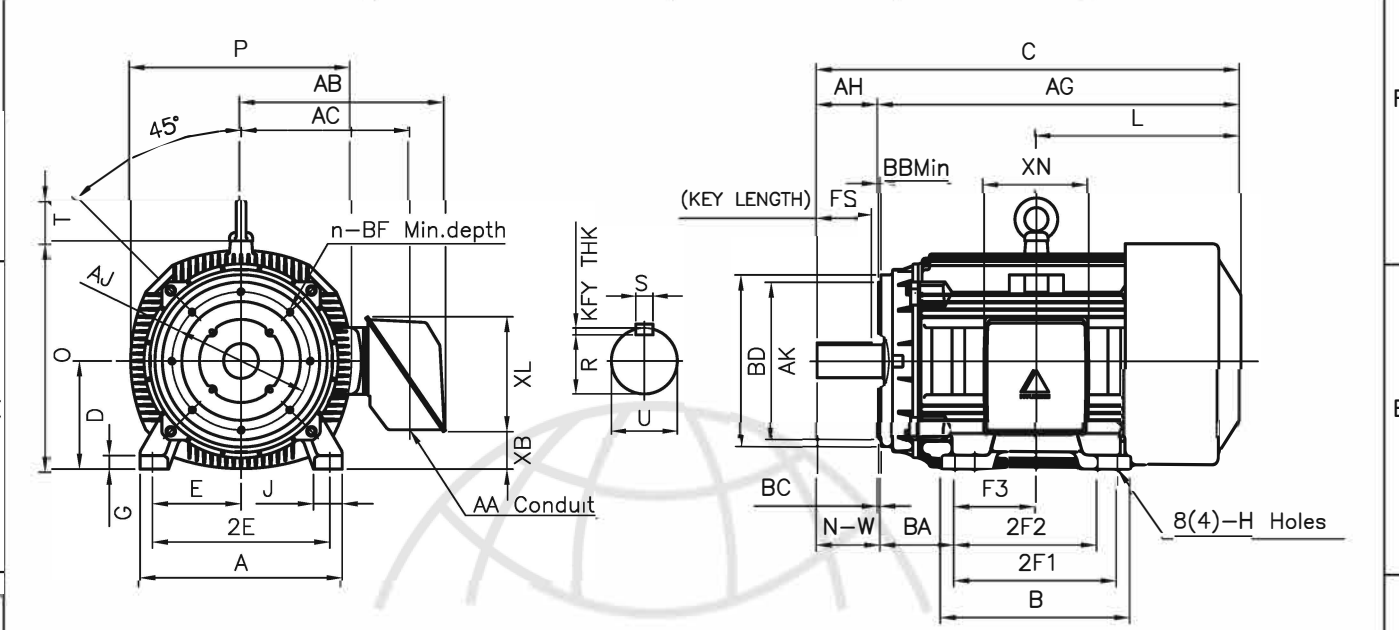

DIMENSIONS

MOUNTING									CONDUIT BOX					APPROX. WGT.(LB)	
A	B	2E	2F1	2F2	F3	G	J	H	AA	AB	AC	XB	XL	XN	
20.51	19.21	18.00	16.50	(14.50)	8.248	1.42	3.07	0.81	3.00	21.26	18.03	3.83	11.65	10.63	1700

OVERALL									SHAFT			KEY	BEARING		
BA	C	D	L	O	P	T	AG	U	N-W	KEYWAY		THK.	DRIVE END	OPP. DRIVE END	
										R	ES	S			
7.50	45.21	11.00	20.96	23.19	22.44	4.33	36.71	3.375	8.50	2.880	6.93	0.875	0.875	6318C3	6316C3

C - FACE								
AJ	AK	BB Min	BC	BD	BF	BF depth	n	AH
14.00	16.00	0.25	0.25	16.93	5/8-11	0.94	8	8.25

[NOTE]

- Dimension "D" tolerance : +0.00inch ~ -0.03inch (143TC-365TC) : +0.000inch ~ -0.06inch (404TC-449TC)
- Dimension "U" tolerance : +0.000inch ~ -0.0005inch (143TC-215TC): +0.000inch ~ -0.001inch (254TC-449TC)
- Dimension "R" tolerance : +0.000inch ~ - 0.015inch
- Dimension "AK" tolerance : +0.000inch ~ -0.003inch (143TC-286TC): +0.000inch ~ -0.005inch (324TC-449TC)

APPD BY	K.J. KANG	UNIT	INCH	SUBJECT	445TC	CAD PROJ \ FILE	
CHKD BY		SCALE	N/S	TITLE	OUTLINE	MMSTDMTR\A1318AA	
CHKD BY		PROJEC'N	3rd Angle				
DSND BY	N.D.LEE	DATE	2011.02.09				
						REF. NO	A1318AA
				DWG NO	350A1318AA	Revision No. 0	