



TEFC

THREE PHASE INDUCTION MOTOR

TYPE

XKP, XIP

CAST IRON FRAME


FRAME SIZE

OUTPUT(HP)

POLES

Hz

TIME RATING

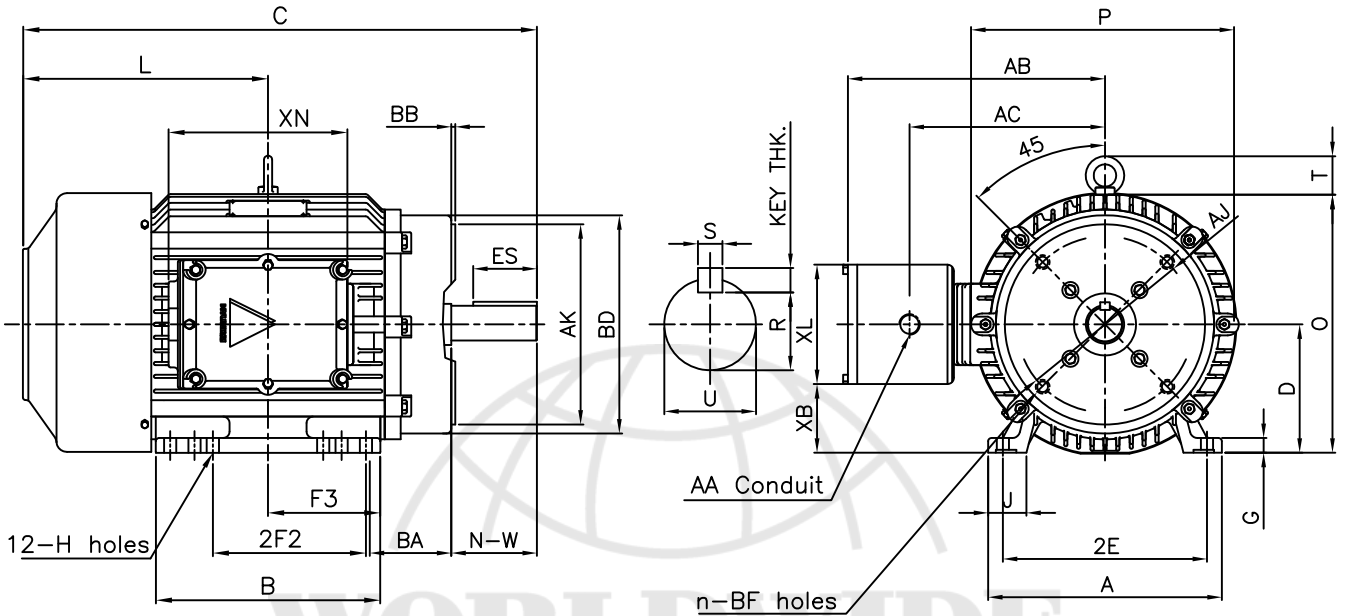

F L A N G E						M O U N T I N G								
AJ	AK	BD	BB	BF	n	A	B	2E	-	2F2	F3	G	J	H
11.0	12.50	13.27	0.25	5/8-11	4	14.33	13.78	12.50	-	10.50	6.00	1.11	2.36	0.66

C O N D U I T B O X						O V E R A L L									APPROX. WGT.(LB)
AA	AB	AC	XB	XL	XN	-	BA	C	D	L	O	P	T		
2.00	15.27	11.02	3.94	7.87	11.26	-	5.25	33.03	8.00	15.55	16.19	15.84	2.41	324T	
														550	

S H A F T					KEY THK.	B E A R I N G	
U	N-W	KEYWAY				DRIVE END	OPP. DRIVE END
		R	ES	S			
2.125	5.25	1.845	3.91	0.500	0.500	6313ZC3	6211ZC3

NOTE

- 1.Dimension "D" tolerance : +0.00inch - 0.03inch
- 2.Dimension "U" tolerance : +0.000inch - 0.001inch
- 3.Dimension "R" tolerance : +0.000inch - 0.015inch

APPD BY	KIM.Y.S	UNIT	INCH	SUBJECT	NEMA 324TC	CAD PROJ \ FILE
CHKD BY	KO.S.H	SCALE	1/12			XSMOUTN\A1312BA
CHKD BY		PROJEC'N	3rd Angle	TITLE OUTLINE		
DSND BY	LEE KWANG SOO	DATE	2004.04.02			
				REF. NO	A1312AA	Sheet No. of
				DWG NO	LM-U0324B4TL001	Revision No. 0