

			Uncontrolled Copy	
	4	3	2	1
D	ALL DIMENSIONS SHOWN IN PARENTHESIS ARE REFERENCE DIMENSIONS. ALL OTHER DIMENSIONS ARE TOLERANCED PER THE FOLLOWING CHART <u>UNLESS</u> OTHERWISE SPECIFIED. "C" DIM. = $+/-$.055 SHAFT EXT. = $+/-$.034 LEAD LENGTHS = $+/-$ 1.00 EXTENDED THRU-BOLTS = $+/-$.050 ANGULAR DIMS. = $+/-$ 2 DEGS.		REV ECO C 0025368	REV BY DATE APPD B.ZHAO 04–18–2012 B.SHEN
С		(.69) 10-32 UNF-2A THRU-BOLTS ON A (5.812) DIA. B.C. 1/2-14 NPSM WITH CAP		9
В				.75 MIN.
	(6.50) (2.44) (2	(4) MOUNTI (.34 X	$\begin{vmatrix} 4.00 \\ - 4.00 \end{vmatrix} = \begin{vmatrix} 4.00 \\ - 4.00 \end{vmatrix} = \begin{vmatrix} 4.00 \\ - 4.00 \end{vmatrix}$	— (2.75) — — — — — — — — — — — — — — — — — — —
				PERFORMANCE CURV
	GEOMETRIC CHARACTERIS Z FLATNESS — STRAIGHTNESS ANGULARITY L PERPENDICULARITY (// PARALLELISM O ROUNDNESS (CIRCUL Ø CYLINDRICITY	DIM. TOLERANCES ARE AS FOLLOW X XX XXX (SQUARENESS) (SQUARENESS) LARITY)	APPD: JSHRDA . IGES: THIRD ANGLE PROJECTION DIFFERENCE CONTRACT REV G	UUILINE
		JRFACE CORNER FILLETS TO: NE INCH .020 mm 0.5 MACHINE SURFACES: INCH 125 mm 3.2	CONFIDENTIAL: THIS DRAWING AND ITS INFORMATION THE EXCLUSIVE AND CONFIDENTIAL PROPERTY OF A -BELOIT CORPORATION AND ARE NOT TO BE DISCU DUPLICATED, DISTRIBUTED OR OTHERWISE USED WI THE WRITTEN CONSENT OF REGAL-BELOIT CORPOR -ALL RIGHTS RESERVED.	n are Regal SIZE DWG NO LOSED, C 18961401-
	4	ASME Y14.5M 1994 METRIC DIMS. SHOWN IN [BRACKE	ITHE WRITTEN CONSENT OF REGAL-BELOIT CORPOR. -ALL RIGHTS RESERVED. 2	NONE SCALE NONE
	<u> </u>	0		



Uncontrolled Copy	
4 3 2	1
ALL DIMENSIONS SHOWN IN PARENTHESIS ARE REFERENCE DIMENSIONS. ALL OTHER DIMENSIONS ARE TOLERANCED PER THE FOLLOWING CHART <u>UNLESS</u> OTHERWISE SPECIFIED. C 0025368 C C 00255 C C 00255 C C 00255 C C 00255 C C 00255	REVISADO POR: FECHA: APROBADO F B.ZHAO 04-18-2012 B.SHEN
C (6.50) (45) (5.31) (6.50) (7.5) (7	4.19 (1.88) (.69) (.69) WHEN RE SCREW 1 IN CUSH 3/16 1.38
$B \qquad (6.75) \qquad (6.75) \qquad (6.75) \qquad (1.50) \qquad (1.50)$.6250 .6245
$\begin{vmatrix} - & (2.44) & - & & (2.44) & - & & (2.44) & - & & (34 \times 1.22) & & - & (1.50) & - &$	- (2.75)
	PERFORMANCE CUR
A MENOS QUE SE ESPECIFIQUE DE OTRA MANERA, LAS TOLERANCIAS DE LAS DIMS; SON LAS SIGUIENTES: ANGULARIDAD DIBUJADO POR: JBLANK 12-07-2004 A MENOS QUE SE ESPECIFIQUE DE OTRA MANERA, LAS TOLERANCIAS DE LAS DIMS; SON LAS SIGUIENTES: X XX XXX XXX XXX XXX DIMS; SON LAS SIGUIENTES: ANGULARIDAD DIBUJADO POR: JBLANK 12-07-2004 A MENOS QUE SE ESPECIFIQUE DE OTRA MANERA, LAS TOLERANCIAS DE LAS DIMS; SON LAS SIGUIENTES: X XX XXX XXX XXX XXX DIMS; SON LAS SIGUIENTES: DIMS; SON LAS SIGUIENTES: DIMS; SON LAS SIGUIENTES: Mm ±0.5 ±0.13 ±0.013 DIBUJADO POR: JBLANK 12-07-2004	DESCRIPCION:
// PARALELISMO O REDONDEZ (CIRCULARIDAD) ANG. ±.50 GRADOS ELIMINAR REBABAS Y ORILLAS FILOSAS TERCER ANGULO DE PROYECCION	G OUTLINE
A CILLINDRICIDAD A PERFIL DE CUALQUIER SUPERFICIE PERFIL DE CUALQUIER LINEA VARIACION A POSICION REAL © CONCENTRICIDAD = SIMETRIA A SME Y14.5M 1994 DEL BORDE. PULG 0.03015 mm 0.1-0.4 FILETEAR ESQUINA: PULG .020 mm 0.5 MAQUINAR SUPERFICIES PULG 125 mm 3.2 CONFIDENCIAL: ESTE DIBUJO Y SU INFORMACION SON PROPIEDAD DE USO EXCLUSIVO Y CONFIDE SON PROPIE	encial de tamaño:
4 3 2	1

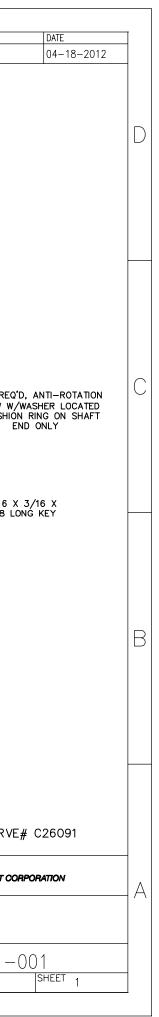

			Uncor	ntrolled Copy		
	4	3		2		1
D	ALL DIMENSIONS SHOWN IN PARENTHESIS ARE REFERENCE DIMENSIONS. ALL OTHER DIMENSIONS ARE TOLERANCED PER THE FOLLOWING CHART <u>UNLESS</u> OTHERWISE SPECIFIED. "C" DIM. = $+/-$.055 SHAFT EXT. = $+/-$.055 SHAFT EXT. = $+/-$.034 LEAD LENGTHS = $+/-$ 1.00 EXTENDED THRU-BOLTS = $+/-$.050 ANGULAR DIMS. = $+/-$ 2 DEGS.			i本 ECO C 0025368		批准 B.SHEN
С		(45') (45') (45') (.69) (.69) (.69) (.69) (.69) (.69) (.69) (.69) (.69) (.69) (.1/2-14 NPSM WTH CAP	(5.31) (3.88			WHEN REG SCREW W IN CUSHI 3/16 1.38 I
B					.75 MIN. - (2.75)	6250 .6245
					PERFORM	ANCE CURV
	形位公差 ロ 平面度 一 直线度	除另有注明 尺寸公差如下:	绘图: JBLAN	K 12-07-2004		REGAL-BELOIT C
	∠ 倾斜度 ⊥ 垂直度 // 平行度 ○ 圆度 夕 圆柱度 ○ 面轮廓良 ○ 34 統动 ○ 34 統动	X XX XXX XXX 英寸 ±.1 ±.02 ±.005 ±.0005 毫米 ±0.5 ±0.13 ±0.013 角度 ±.50 度 消理毛刺和尖枝 英寸 .003015 毫米 0.1-0.4 内圆角 英寸 .020 毫米 0.5 麦和鮒敏市 .5	机密:本图纸及	A B B M B M B M B M B M B M B M B M B M	2011 TION。 图幅 0 图号	JTLINE
	 ਊ 回談动	表面粗糙度 英制 125 米制 3.2 ASME Y14.5M 1994 米制尺寸显示在[]		注其他用途。一版权所有	C 189 ^{比例} NONE	961401-
	4	ASME 114.0M 1994 100/04 200/04 20		2		1

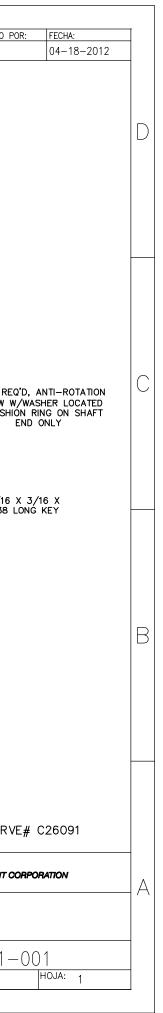