


SHEET 10
REV 10
52A102690
SIZE DRAWING NO. A

THIRD ANGLE PROJECTION



REVISIONS

REV.	DESCRIPTION	DATE	APPROVED
9	REDRAWN BY 2M SOFTWARE CO	02/05/95	CCP
10	FORMAT CHG PER ISAAC 05-1777	01/06/06	RAJKUMAR

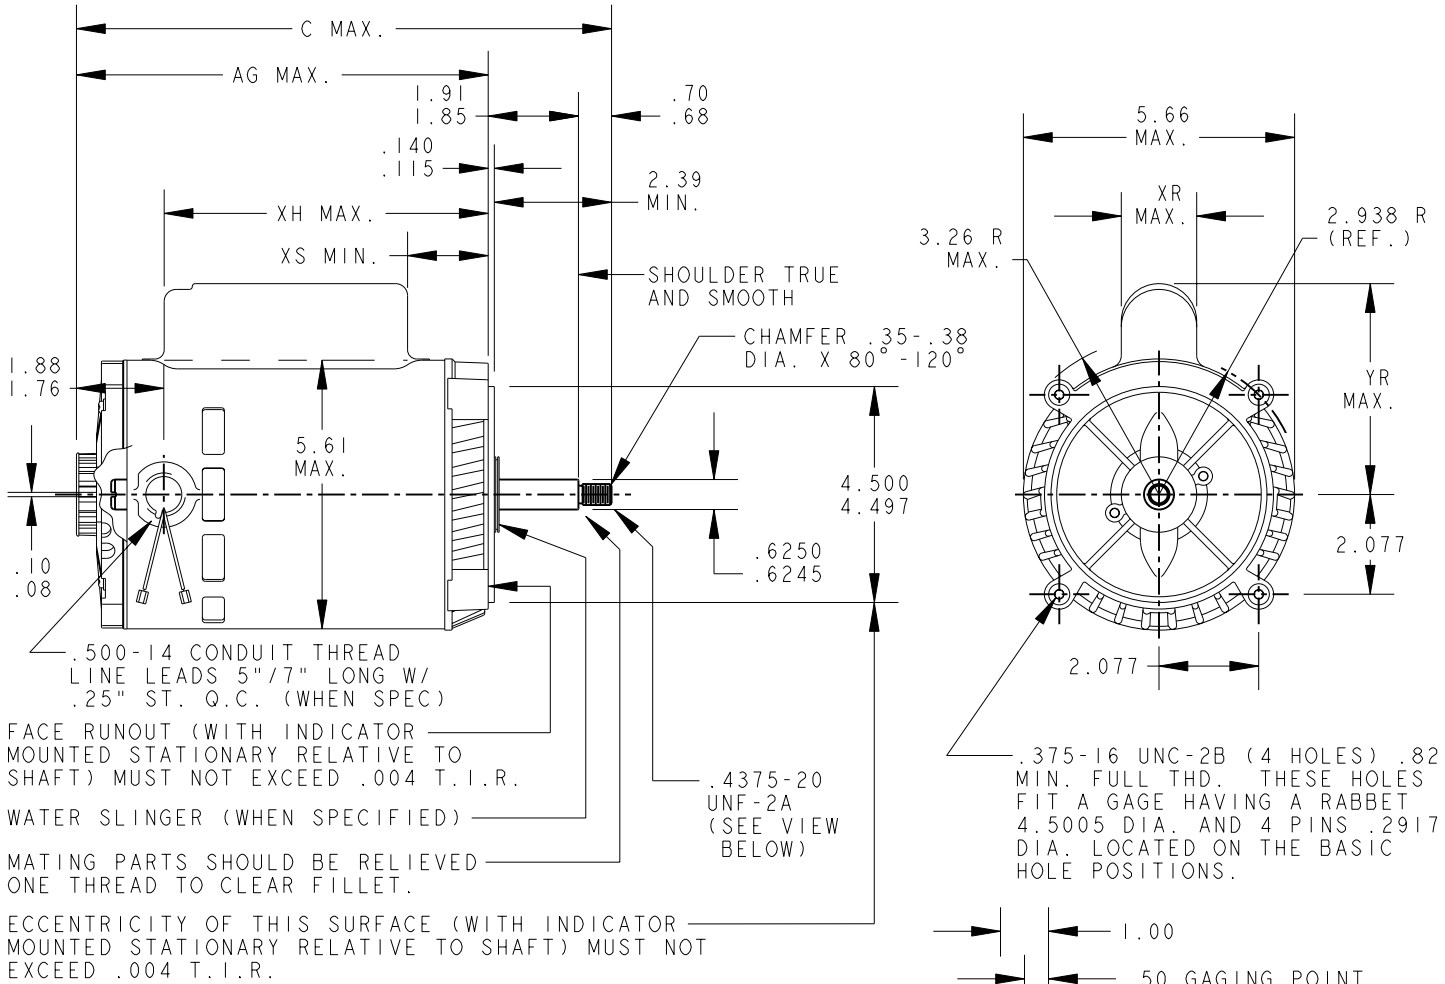

.500-14 CONDUIT THREAD
LINE LEADS 5" / 7" LONG W/
.25" ST. Q.C. (WHEN SPEC)

FACE RUNOUT (WITH INDICATOR
MOUNTED STATIONARY RELATIVE TO
SHAFT) MUST NOT EXCEED .004 T.I.R.

WATER SLINGER (WHEN SPECIFIED)

MATING PARTS SHOULD BE RELIEVED
ONE THREAD TO CLEAR FILLET.

ECCENTRICITY OF THIS SURFACE (WITH INDICATOR
MOUNTED STATIONARY RELATIVE TO SHAFT) MUST NOT
EXCEED .004 T.I.R.


.375-16 UNC-2B (4 HOLES) .82
MIN. FULL THD. THESE HOLES
FIT A GAGE HAVING A RABBIT
4.5005 DIA. AND 4 PINS .2917
DIA. LOCATED ON THE BASIC
HOLE POSITIONS.

1.00
.50 GAGING POINT

ECCENTRICITY OF THREADED
PORTION OF SHAFT IS HELD
WITHIN .004 GAGE READING
WITH THE INDICATOR ON O.D.
OF GROUND RING GAGE AS
SHOWN, THE GAGE BEING
STATIONARY WITH RESPECT
TO THE ROTOR.

8	KC	37	56J	11.35	8.76	1.39	7.03	2.72	5.44	
7	KC	39	56J	13.10	10.49	3.27	8.91	1.60	4.34	8.50
6	KC	39	56J	12.35	9.74	2.52	8.16	1.60	4.34	7.75
5	KC	38	56J	11.82	9.21	1.99	7.63	1.60	4.34	
4	KC	37	56J	11.22	8.61	1.39	7.03	1.60	4.34	
3	KC	36	56J	10.82	8.21	1.39	6.63	1.60	4.34	
2	KC	38	56J	11.82	9.21	1.99	7.63	2.22	4.96	
1	KC	39	56J	12.35	9.74	2.19	7.83	2.22	4.96	7.75
P	TYPE	GE SIZE	NEMA FR	C	AG	XS	XH	XR	YR	SHELL REF.

SIGNATURES		DATE
MODEL	B.A.C	04/24/78
DETAIL	.	.
CHECKED	.	.
ENGRG	.	.
MFG	.	.
QUALITY	.	.
ISSUED	C.C.P	02/05/95
FOR ADDITIONAL INFO REFER TO:		
APPLIED PRACTICES	.	.
DIMENSIONS ARE IN INCHES	✓	
MATERIAL	SOLID MODEL: 52A102690	



REGAL-BELOIT CORPORATION

TITLE

OUTLINE

FORM N - PUMP MOTOR - DRIP PROOF - R2 END MOUNTED

SLEEVE & BALL BEARING - FMF:5KC37MN135T

SIZE: DRAWING **A**

SCALE: 0.250 REF. No: .

SHEET 1 of 1

52A102690 10