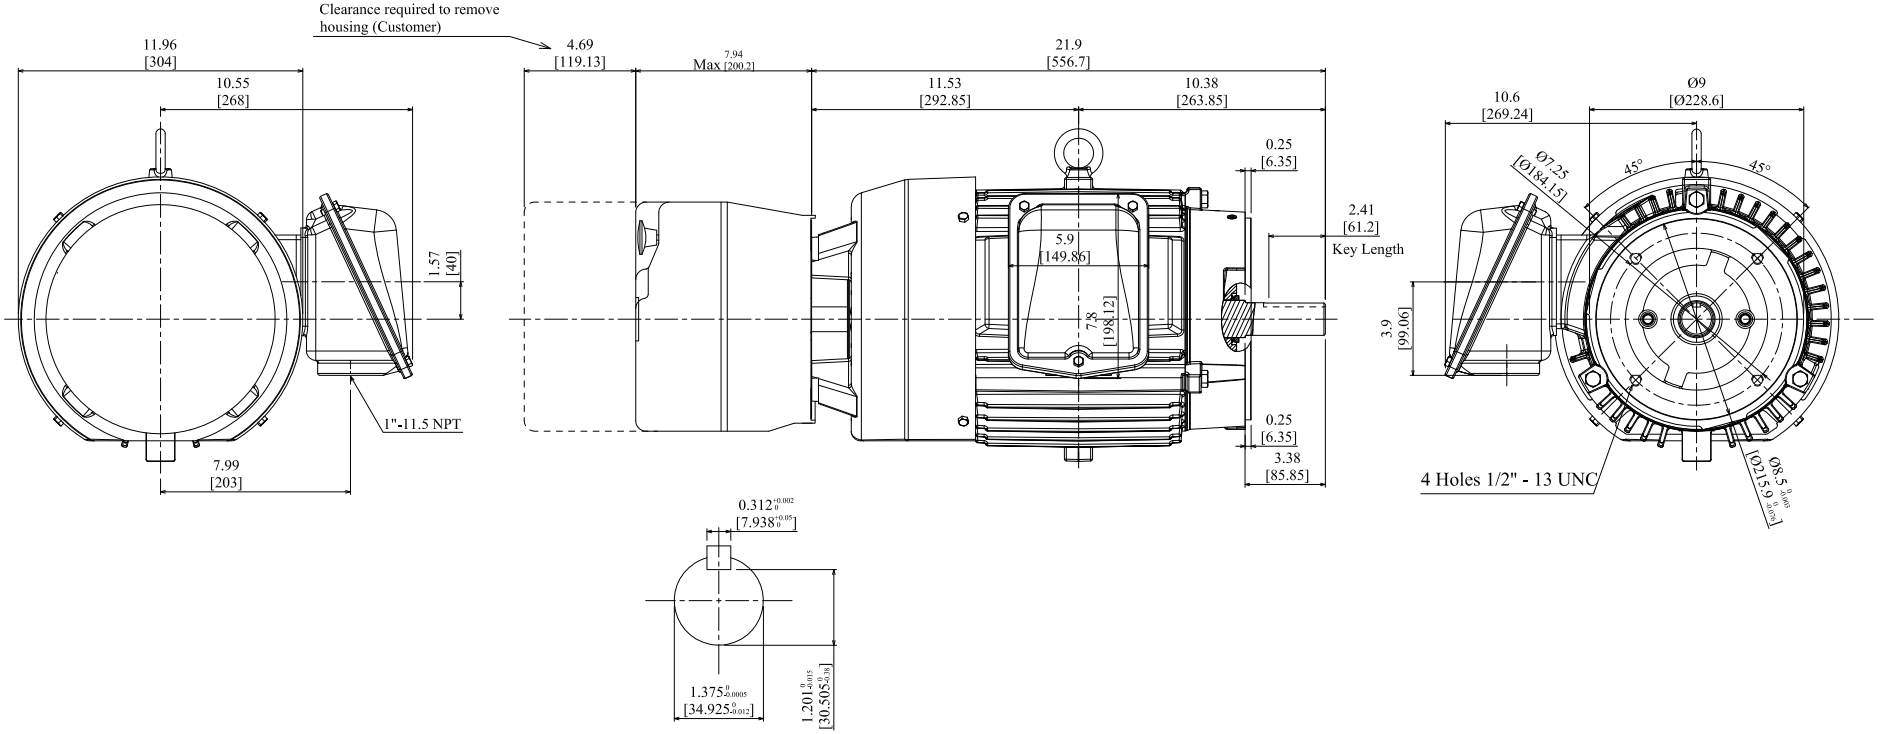


| | |
|---|---|
| UNITS: INCHES[MM] | NOTES: |
| ROTATION FROM NDE | 1. MAIN CONDUIT BOX MAY BE ROTATED IN 90° INCREMENTS |
| X CCW ☐ CW | 2. STANDARD PRODUCT USES BI-DIRECTIONAL FAN. OPPOSITE ROTATION AVAILABLE ONLY BY CONNECTION CHANGE. |
| | 3. KEY DIMENSIONS EQUAL 0.313"x0.313"x2.38"(MOTOR SUPPLIED WITH KEY) |

TOSHIBA RESERVES THE RIGHT TO MAKE CHANGES OF TECHNICAL IMPROVEMENT AND THE DATA MAY CHANGE WITHOUT NOTICE

☐ PRELIMINARY

DO NOT USE FOR CONSTRUCTION, INSTALLATION, OR APPLICATION PURPOSES UNLESS THE DRAWING IS MARKED AS CERTIFIED

X CERTIFIED

TOSHIBA

www.toshiba.com/tic

TOSHIBA INTERNATIONAL CORPORATION

SEVERE DUTY EQP Global SD

# TOTALLY ENCLOSED FAN COOLED ROUND BODY C-FACED 3 PHASE INDUCTION MOTOR 213TC/215TC F1 ASSEMBLY

DRAWING #: MDSLV132-03

REV. DATE: 08/08/2018 REV. #: 0 PER.: L.LIAN

REV. DESCRIP.: TEFC BRAKE ROUND BODY FRAME