


0.375-10 UNC 4 PLACES FOR JACKING BOLTS

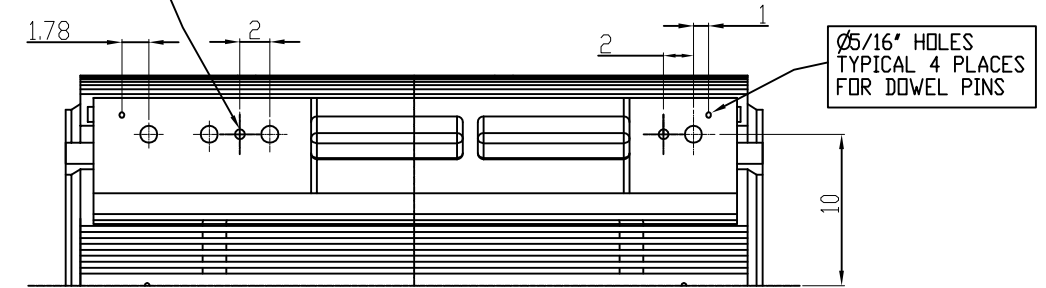

UNITS: INCHES

TECHNICAL INFORMATION

1. BEARING LUBRICATION DE: TURBINE OIL ISO VG32
ODE: TURBINE OIL ISO VG32
2. BEARING TYPE DE: M7-65 INS
ODE: M7-65 INS
3. WINDING TEMP. DETECTORS
NUMBER AND TYPE: 6xRTD(Pt0°C-100ohm)
LOCATION: IN STATOR SLOT
4. BEARING TEMP. DETECTORS
NUMBER AND TYPE: _____
5. SPACE HEATER 1 PHASE
VOLTS: 120 WATTS: 240
6. ROTATION: CCW VIEWED FROM NON DRIVE END
THIS MOTOR IS UNI DIRECTIONAL
7. MOTOR PAINT COLOR: GRAY
8. APPROX. WEIGHT: 5000 Lbs
9. ACCESSORIES:

DRAWING LIST				
MAIN TERMINAL BOX 130-7622-55				
AUX TERMINAL BOX FOR				
SPACE HEATER	130-7520-50	2	JACKING TO INLINE ADD DOWELS	RWS 1/6/14
R.T.D.	130-7522-51	1	ADD MOTOR COVER AND AIR DEFLECTOR	BCS 3/17/10
THERMISTOR	N/A			
		0	FIRST ISSUE	BCS 5/13/09
PRODUCTION #	N/A	NO.	REVISION	BY DATE

MOTOR OUTLINE FOR THREE PHASE INDUCTION MOTOR									
CUSTOMER NAME				P.O. NO.	MOTOR TAG NO.				
OUTPUT HP	POLE	VOLTAGE V	FREQUENCY Hz	FULL LOAD SPEED (min ⁻¹)	TOSHIBA MODEL NO.				
TYPE	FORM	INS. CLASS	RATING	FRAME	S.F.	ENCLOSURE			
	2	F	CONT.	5011USS		TEFC			
TOSHIBA INTERNATIONAL CORPORATION HOUSTON, TEXAS U.S.A.									
3rd ANGLE PROJ.	PREPARED BY:	DATE:	CHECKED BY:	DATE:	DRAWING NO.:	REV.			
	B SIDLE	5/13/09	EDDIE R.	5/14/09	MDSL0071-20	2			