

TECHNICAL INFORMATION


- BEARING LUBRICATION DE: TURBINE OIL ISO VG32
ODE: TURBINE OIL ISO VG32
- BEARING TYPE DE: M11-125 INS
ODE: M11-125 INS
- WINDING TEMP. DETECTORS
NUMBER AND TYPE: 6xRTD(Pt0°C-100ohm)
LOCATION: IN STATOR SLOT
- BEARING TEMP. DETECTORS
NUMBER AND TYPE: _____
- SPACE HEATER 1 PHASE
VOLTS: 120 WATTS: 800
- ROTATION: CCW VIEWED FROM NON DRIVE END
THIS MOTOR IS UNI DIRECTIONAL
- MOTOR PAINT COLOR: GRAY
- APPROX. WEIGHT: 14,000 Lbs
- ACCESORIES:

**PRELIMINARY
FOR QUOTATION ONLY
DO NOT BUILD
FROM THIS DRAWING**

DRAWING LIST

| | |
|----------------------|-------------|
| MAIN TERMINAL BOX | |
| 130P-7550-68 | |
| AUX TERMINAL BOX FOR | |
| SPACE HEATER | 130-7520-50 |
| R.T.D. | 130-7522-51 |
| THERMISTOR | N/A |
| PRODUCTION # | N/A |

| | | | |
|-----|-------------|----|----------|
| 0 | FIRST ISSUE | RC | 06/17/14 |
| NO. | REVISION | BY | DATE |

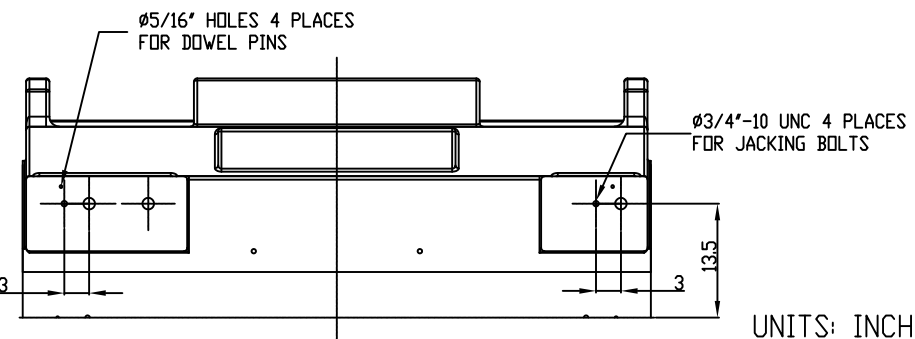

UNITS: INCHES

**MOTOR OUTLINE FOR
THREE PHASE INDUCTION MOTOR**

| | | | | | | | |
|--|--------------|--------------|--------------|--------------------------------------|-------------------|----------------|--|
| CUSTOMER NAME | | | | P.O. NO. | | MOTOR TAG NO. | |
| OUTPUT HP | POLE | VOLTAGE V | FREQUENCY Hz | FULL LOAD SPEED (min ⁻¹) | TOSHIBA MODEL NO. | | |
| TYPE | FORM | INS. CLASS F | RATING CONT. | FRAME 6813US | S.F. | ENCLOSURE WP-I | |
| TOSHIBA INTERNATIONAL CORPORATION HOUSTON, TEXAS U.S.A. | | | | | | | |
| 3rd ANGLE PROJ. | PREPARED BY: | DATE: | CHECKED BY: | DATE: | DRAWING NO.: | REV. | |
| | R.CANTU | 06/17/14 | | | MDSL0086-77 | 0 | |