

TECHNICAL INFORMATION


1. BEARING LUBRICATION DE: TURBINE OIL ISO VG32
ODE: TURBINE OIL ISO VG32
2. BEARING TYPE DE: M11-125 INS
ODE: M11-125 INS
3. WINDING TEMP. DETECTORS
NUMBER AND TYPE: 6xRTD(Pt0C-100ohm)
LOCATION: IN STATOR SLOT
4. BEARING TEMP. DETECTORS
NUMBER AND TYPE: _____
5. SPACE HEATER _____ 1 PHASE
VOLTS: 120 WATTS: 800
6. ROTATION: CCW VIEWED FROM NON DRIVE END
THIS MOTOR IS UNI DIRECTIONAL
7. MOTOR PAINT COLOR: GRAY
8. APPROX. WEIGHT: 14,000 Lbs
9. ACCESSORIES:

**PRELIMINARY
FOR QUOTATION ONLY
DO NOT BUILD
FROM THIS DRAWING**

DRAWING LIST

MAIN TERMINAL BOX 130P-7550-68	
AUX TERMINAL BOX FOR	
SPACE HEATER	130-7520-50
R.T.D.	130-7522-51
THERMISTOR	N/A
PRODUCTION #	N/A

NO.	0	FIRST ISSUE	RC	06/17/14
REVISION			BY	DATE

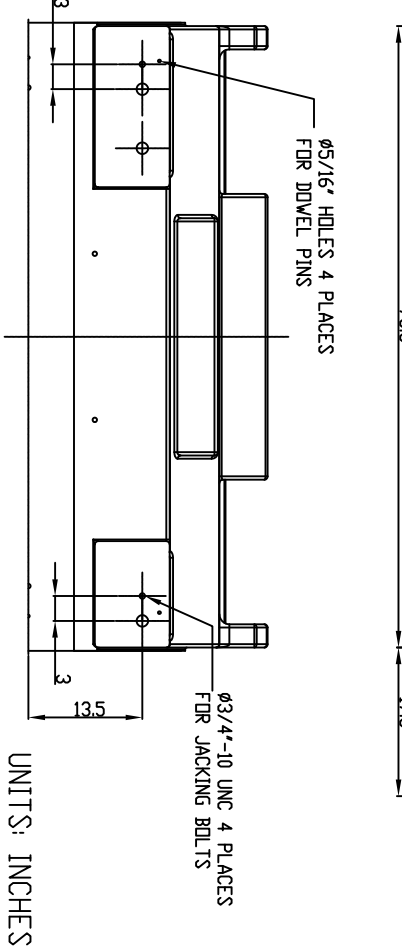

CUSTOMER NAME		P.O. NO.		MOTOR TAG NO.	
MOTOR OUTLINE FOR THREE PHASE INDUCTION MOTOR					
OUTPUT	HP	POLE	4	VOLTAGE	V
TYPE	HP	FORM	F	FREQUENCY	Hz
		INS. CLASS	F	RATING	CONT.
		FRAME	6813US	FULL LOAD SPEED	(min-1)
		S.F.		TOSHIBA MODEL NO.	
		ENCLOSURE	WP-1		
TOSHIBA INTERNATIONAL CORPORATION HOUSTON, TEXAS U.S.A.					
3rd ANGLE PROJ.	PREPARED BY:	DATE:	CHECKED BY:	DATE:	DRAWING NO.:
	R.CANTU	06/17/14			MDSL0086-76
					REV.
					0