


**TECHNICAL INFORMATION**

- BEARING LUBRICATION DE: MOBIL POLYREX EM  
ODE: MOBIL POLYREX EM
- BEARING TYPE DE: 6315C3  
ODE: 6315C3 (INSULATED)
- WINDING TEMP. DETECTORS  
NUMBER AND TYPE: 6xRTD(Pt0°C-100ohm)  
LOCATION: IN STATOR SLOT
- BEARING TEMP. DETECTORS  
NUMBER AND TYPE: N/A
- SPACE HEATER 1 PHASE  
VOLTS: 120 WATTS: 400
- ROTATION: CCW VIEWED FROM NON DRIVE END  
THIS MOTOR IS UNI DIRECTIONAL
- MOTOR PAINT COLOR: GRAY
- APPROX. WEIGHT: 5000 Lbs.
- ACCESSORIES:

**DRAWING LIST**

MAIN TERMINAL BOX 130-7622-55					
AUX TERMINAL BOX FOR					
SPACE HEATER	130-7520-50				
R.T.D.	130-7522-51				
THERMISTOR	-	1	UPDATE	RWS	1/2/14
PRODUCTION #	-	0	FIRST ISSUE	MH	012904
UNITS:	INCHES	NO.	REVISION	BY	DATE

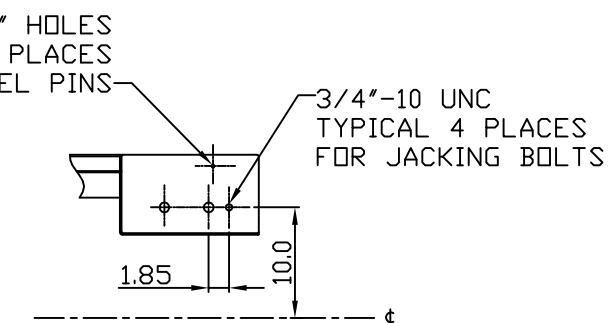

<b>MOTOR OUTLINE FOR THREE PHASE INDUCTION MOTOR</b>									
CUSTOMER NAME				P.O. NO.		MOTOR TAG NO.			
OUTPUT	POLE	VOLTAGE	FREQUENCY	FULL LOAD SPEED	TOSHIBA MODEL NO.				
<b>600</b> HP	<b>2</b>	2300 / 4160V	<b>60</b> Hz	<b>3560</b> (min <sup>-1</sup> )	<b>6003WPAK11F-A</b>				
TYPE	FORM	INS. CLASS	RATING	FRAME	S.F.	ENCLOSURE			
<b>TIKK</b>	<b>DCK1</b>	F	CONT.	5011/12USS	<b>1.15</b>	WP-I			
<b>TOSHIBA INTERNATIONAL CORPORATION</b>									
<b>HOUSTON, TEXAS U.S.A.</b>									
3rd ANGLE PROJ.	PREPARED BY:	DATE:	CHECKED BY:	DATE:	DRAWING NO.:	REV.			
	M.HO	012904	D. HENSLEY	012904	MDSL0086-05	1			