


LEAD DESCRIPTION:

1 BLACK AND 1 WHITE LEAD WITH .50 BARE WIRE STRIP. 36.00 TO 38.00 LONG.

2 BROWN LEADS WITH .25 FLAG-TYPE QUICK CONNECTS 36.00 TO 38.00 LONG

WHITE MARKED LEAD IS COMMON TO WHITE. REVERSING LEADS ARE MOLDED INTO MATING PULL APART PLUGS. 1 YELLOW & 1 PURPLE LEAD PER PLUG. 4.00 TO 6.00 LONG.

CW ROTATION - SHAFT END SHOWN TO REVERSE, CONNECT PURPLE TO YELLOW, AND YELLOW TO PURPLE

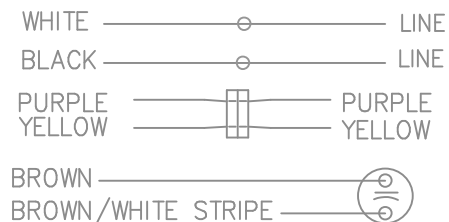

DASH	FR.	C	A
350	48Y	9.00	4.00
375	48Y	9.25	4.25
400	48Y	9.50	4.50
425	48Y	9.75	4.75
475	48Y	10.25	5.25

NO.		REVISION	BY & DATE	CHK	ANG	TOLERANCES UNLESS SPECIFIED	MARATHON ELECTRIC	DRAWN					
						DEC.		INCHES	RP	01-07-2009			
						.X	±.1	TITLE OUTLINE	CHK	SP 01-07-2009			
						.XX	±.02		APPD	NB 01-07-2009			
						.XXX	±.005		SCALE	3=9			
						.XXXX	±.0005		REF	SS403417			
							MAT'L.	FMF	07-2426	REV.			
							FINISH	PREV					
						RFP	01-07-2009	CAD FILE	SS403801	SIZE	DRAWING NO.	PAGE 1 OF 1	
						DIST	WP			A	SS403801		

THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED THIS IS AN ELECTRONICALLY GENERATED DOCUMENT - DO NOT SCALE THIS PRINT