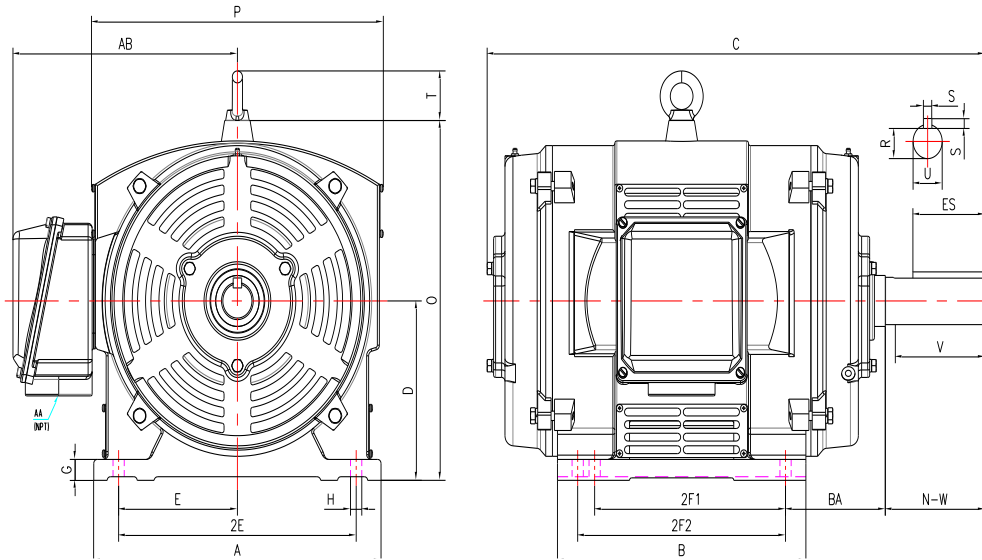


PE365T-75-4-ODP

GENERAL PURPOSE ELECTRIC MOTOR
NEMA PREMIUM EFFICIENCY
CAST IRON CONSTRUCTION - OPEN DRIP PROOF
INVERTER DUTY 10:1 CT; 20:1 VT - NEMA MG1 PART 31



DIMENSIONS

HP	RPM	Frame	MOUNTING														
			A	B	C	D	G	H	J	E	2E	2F1	2F2	O	P	T	BA
75	1800	365T	17.00	14.65	29.30	9.00	1.05	0.66	NA	7.00	14.00	11.25	12.25	18.10	17.20	2.60	5.88

Shaft Extension, Key Set						Conduit Box		Bearings		Mount
U	V	R	S	ES	N-W	AA	AB	DE	ODE	
2.38	5.62	2.02	0.63	4.28	5.88	3.00	12.40	6313	6313	F1

BEARING LUBRICATION: The bearings come lubricated with Mobil Polyrex EM Polyurea Grease. It is recommended that you add some additional lubrication when the motor is installed.

Three options (brands) for suitable lubrication include, but are not limited to, the following:

- 1.) Mobil Polyrex EM
- 2.) Citco Polyurea MP
- 3.) Conoco Phillips Polytac EP





PE365T-75-4-ODP

GENERAL PURPOSE ELECTRIC MOTOR

NEMA PREMIUM EFFICIENCY

CAST IRON CONSTRUCTION - OPEN DRIP PROOF








INVERTER DUTY 10:1 CT; 20:1 VT - NEMA MG1 PART 31

PERFORMANCE DATA

HP	RPM	Frame	Voltage	Frequency (Hz)	Full Load S.F.	Insulation Class	NEMA Design	Slip (%)	NEMA Code	Enclosure Type	IP Rating	Max. Ambient
75	1780	365T	208-230/460	60	1.15	F	B	1.11	G	ODP	23	40° C

Amps (460V)		Efficiency (%)				Power Factor			Torque (ft-lb)			DE Bearing	ODE Bearing	Connection	Weight (lbs.)
FLA	LRA	100%	75%	50%	Min.	100%	75%	50%	FLT	LRT %	BDT %				
87.0	542.0	95.0	95.0	94.5	94.1	0.85	0.82	0.75	222.0	170	250	6313	6313	12 Lead 2Δ/Δ	754

NAME PLATE

 North American Electric, Inc.													CONNECTION DIAGRAMS 208-230V 		
INVERTER DUTY 20:1 VT; 10:1 CT															
CAT NO: PE365T-75-4-ODP				FRAME 365T				PHASE 3				460V 			
HZ 60		S.F. 1.15		HZ 50		S.F. 1.0		ENCL ODP		IP 23					
HP 75		RPM 1780		HP 75		RPM 1480		DUTY CONT		DES B					
VOLTS 208-230/460				VOLTS 190/380				AMB 40° C				INS F			
FLA 191 - 174 / 87			FLA 210/105				DE BEARING 6313								
CODE G		P.F. 0.85		CODE F		P.F. 0.86		ODE BEARING 6313							
EFF 95.0		MIN 94.1		EFF 93.8		MIN 92.6		LUB: Mobil Polyrex EM							
MOTOR WEIGHT 754 LBS			CONNECTION 12 Lead 2Δ/Δ				SER NO								
General purpose use on industrial machinery installed in environments with minimal dirt and moisture. Hernando, Mississippi										   CC 082A					

APPLICATIONS:

General purpose use on pumps, fans, blowers, compressors, conveyors, material handling and other industrial machinery installed in environments with minimal dirt and moisture.