

PES56C1.5M-4

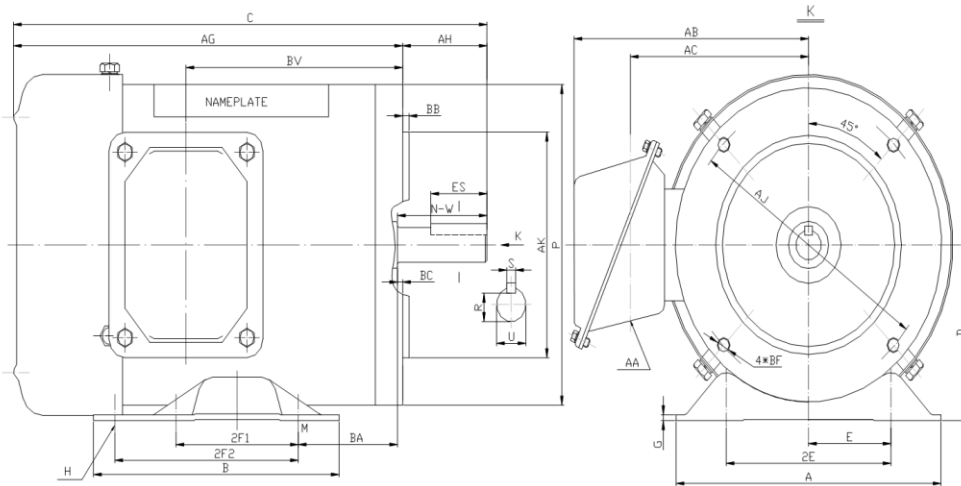
WASHDOWN DUTY MOTOR

NEMA PREMIUM EFFICIENCY

STAINLESS STEEL CONSTRUCTION - C-FLANGE WITH FEET

TOTALLY ENCLOSED FAN COOLED - IP66 CONSTRUCTION

INVERTER DUTY 10:1 CT; 20:1 VT - NEMA MG1 PART 31



DIMENSIONS

HP	RPM	Frame	Mounting													
			A	B	C	D	G	H	E	2E	2F1	2F2	P	AK	AJ	AH
1.5	1800	56C	6.50	6.50	12.57	3.50	0.12	1.22*0.34	2.44	4.88	3.00	0.00	6.50	4.500	5.875	2.06

Mounting				Shaft Extension, Key Set					Conduit Box				Bearings		Mount	
AG	BA	BB	BC	BF	U	R	S	ES	N-W	AA	AB	AC	BV	DE		ODE
10.51	2.75	0.16	-0.19	4*3/8-16	0.625	0.517	0.188	1.41	1.88	0.86	5.75	4.25	6.30	6205-2RS	6205-2RS	F1

BEARING LUBRICATION: The bearings come lubricated with Mobil Polyrex EM Polyurea Grease.





PESS56C1.5M-4








WASHDOWN DUTY MOTOR
NEMA PREMIUM EFFICIENCY
STAINLESS STEEL CONSTRUCTION - C-FLANGE WITH FEET
TOTALLY ENCLOSED FAN COOLED - IP66 CONSTRUCTION
INVERTER DUTY 10:1 CT; 20:1 VT - NEMA MG1 PART 31

PERFORMANCE DATA

HP	RPM	Frame	Voltage	Frequency (Hz)	Full Load S.F.	Insulation Class	NEMA Design	Slip (%)	NEMA Code	Enclosure Type	IP Rating	Max. Ambient
1.5	1750	56C	208-230/460	60	1.15	F	B	2.8	K	TEFC	66	40° C

Amps (460V)		Efficiency (%)				Power Factor			Torque (ft-lb)			DE Bearing	ODE Bearing	Connection	Weight (lbs.)
FLA	LRA	100%	75%	50%	Min.	100%	75%	50%	FLT	LRT %	BDT %				
2.3	20.0	86.5	83.0	79.0	84.0	0.72	0.61	0.50	4.4	285	300	6205-2RS	6205-2RS	9 Lead 2Y/Y	42

NAME PLATE

 North American Electric, Inc.															CONNECTION DIAGRAMS 208-230V 		
INVERTER DUTY 20:1 VT; 10:1 CT										WASHDOWN DUTY STAINLESS STEEL MOTORS							
CAT NO: PESS56C1.5M-4				FRAME 56C				PHASE 3				460V 					
HZ 60	S.F. 1.15	HZ 50	S.F. 1.2	ENCL TEFC	IP 66												
HP 1.5	RPM 1750	HP 1	RPM 1450	DUTY CONT	DES B												
VOLTS 208-230/460				VOLTS 190/380				AMB 40° C				INS F					
FLA 5 - 4.6 / 2.3				FLA 3.2/1.6				DE BEARING 6205-2RS									
CODE K		P.F. 0.72		CODE K		P.F. 0.75		ODE BEARING 6205-2RS									
EFF 86.5		MIN 84.0		EFF 84		MIN 81.5		LUB: Mobil Polyrex EM									
MOTOR WEIGHT 42 LBS			CONNECTION 9 Lead 2Y/Y				SER NO										
Special purpose motor designed for washdown applications and extremely corrosive environments. Hernando, Mississippi										   CC 082A							

APPLICATIONS:

Applications include washdown applications, food processing, chemical processing, pharmaceuticals, poultry processing, meat processing, dairy applications, bakeries, snack foods, bottling and extremely corrosive environments.